

Technical Information

Levelflex FMP55

Guided wave radar



Interface measurement in liquids

Application

- Rod, rope or coax probe
- Process connection: 1.5" thread or flange
- Temperature: -50 to +200 °C (-58 to +392 °F)
- Pressure: -1 to +40 bar (-14.5 to +580 psi)
- Maximum measuring range: Rod 4 m (13 ft); rope 10 m (33 ft); coax 6 m (20 ft)
- Accuracy: ±2 mm (±0.08 in)
- International explosion protection certificates; ship building approval; EN10204-3.1
- Linearity protocol (3-point, 5-point)

Your benefits

- Reliable measurement even for changing product and process conditions
- HistoROM data management for easy commissioning, maintenance and diagnostics
- Highest reliability due to Multi-Echo Tracking
- Hardware and software developed according to IEC 61508 (up to SIL3)
- Seamless integration into control or asset management systems
- Intuitive user interface in national languages
- Easy proof test for SIL

Table of contents

| | | | |
|--|-----------|--|-----------|
| Important document information | 4 | Process pressure range | 50 |
| Symbols | 4 | Dielectric constant (DC) and conductivity | 50 |
| Function and system design | 6 | Expansion of the rope probes through temperature | 50 |
| Measuring principle | 6 | Mechanical construction | 51 |
| Measuring system | 10 | Dimensions | 51 |
| Input | 11 | Tolerance of probe length | 54 |
| Measured variable | 11 | Weight | 55 |
| Measuring range | 11 | Materials: GT18 housing | 56 |
| Blocking distance | 12 | Materials: GT19 housing | 57 |
| Measuring frequency spectrum | 12 | Materials: GT20 housing | 58 |
| Output | 13 | Materials: Process connection | 60 |
| Output signal | 13 | Materials: Probe | 61 |
| Signal on alarm | 14 | Materials: Mounting bracket | 62 |
| Linearization | 14 | Materials: Adapter and cable for remote display | 63 |
| Galvanic isolation | 14 | Materials: Weather protection cover | 64 |
| Protocol-specific data | 15 | Operability | 65 |
| Energieversorgung | 20 | Operating concept | 65 |
| Terminal assignment | 20 | Local operation | 65 |
| Device plug connectors | 28 | Operation with remote display and operating module | |
| Power supply | 29 | FHX50 | 66 |
| Power consumption | 31 | Remote operation | 66 |
| Current consumption | 31 | Integration in tank gauging system | 70 |
| Power supply failure | 32 | System integration via Fieldgate | 71 |
| Potential equalization | 32 | Certificates and approvals | 72 |
| Terminals | 32 | CE mark | 72 |
| Cable entries | 32 | C-Tick symbol | 72 |
| Cable specification | 32 | Ex approval | 72 |
| Overvoltage protection | 33 | Dual seal according to ANSI/ISA 12.27.01 | 72 |
| Performance characteristics | 34 | Functional Safety | 72 |
| Reference operating conditions | 34 | AD2000 | 72 |
| Maximum measured error | 34 | NACE MR 0175 / ISO 15156 | 72 |
| Resolution | 36 | NACE MR 0103 | 72 |
| Reaction time | 36 | ASME B31.1 and B31.3 | 72 |
| Influence of ambient temperature | 36 | Marine certificate | 72 |
| Mounting | 37 | Telecommunications | 72 |
| Mounting requirements | 37 | CRN-Zulassung | 73 |
| Operating conditions: Environment | 46 | Test, Certificate | 74 |
| Ambient temperature range | 46 | Other standards and guidelines | 75 |
| Ambient temperature limits | 46 | Ordering information | 76 |
| Storage temperature | 49 | Ordering information | 76 |
| Climate class | 49 | 3-point linearity protocol | 77 |
| Altitude according to IEC61010-1 Ed.3 | 49 | 5-point linearity protocol | 78 |
| Degree of protection | 49 | Customized parametrization | 79 |
| Vibration resistance | 49 | Accessories | 80 |
| Cleaning the probe | 49 | Device-specific accessories | 80 |
| Electromagnetic compatibility (EMC) | 49 | Communication-specific accessories | 84 |
| Process | 50 | Service-specific accessories | 85 |
| Process temperature range | 50 | System components | 85 |
| | | Documentation | 86 |
| | | Standard documentation | 86 |
| | | Supplementary documentation | 86 |

Safety documentation 87





Registered trademarks 90

Patents 91







Important document information

Symbols









Safety symbols

| Symbol | Meaning |
|---|--|
|  | DANGER! This symbol alerts you to a dangerous situation. Failure to avoid this situation will result in serious or fatal injury. |
|  | WARNING! This symbol alerts you to a dangerous situation. Failure to avoid this situation can result in serious or fatal injury. |
|  | CAUTION! This symbol alerts you to a dangerous situation. Failure to avoid this situation can result in minor or medium injury. |
|  | NOTE! This symbol contains information on procedures and other facts which do not result in personal injury. |



Electrical symbols

| Symbol | Meaning | Symbol | Meaning |
|---|--|--|--|
|  | Direct current |  | Alternating current |
|  | Direct current and alternating current |  | Ground connection A grounded terminal which, as far as the operator is concerned, is grounded via a grounding system. |
|  | Protective ground connection A terminal which must be connected to ground prior to establishing any other connections. |  | Equipotential connection A connection that has to be connected to the plant grounding system: This may be a potential equalization line or a star grounding system depending on national or company codes of practice. |

Symbols for certain types of information

| Symbol | Meaning |
|---|--|
|  | Permitted Procedures, processes or actions that are permitted. |
|  | Preferred Procedures, processes or actions that are preferred. |
|  | Forbidden Procedures, processes or actions that are forbidden. |
|  | Tip Indicates additional information. |
|  | Reference to documentation |
|  | Reference to page |
|  | Reference to graphic |
|  | Visual inspection |

Symbols in graphics

| Symbol | Meaning |
|---|--|
| 1, 2, 3 ... | Item numbers |
| 1., 2., 3. ... | Series of steps |
| A, B, C, ... | Views |
| A-A, B-B, C-C, ... | Sections |
|  | Hazardous area Indicates a hazardous area. |
|  | Safe area (non-hazardous area) Indicates the non-hazardous area. |


Function and system design

Measuring principle

Basic principles

The Levelflex is a "downward-looking" measuring system that functions according to the ToF method (ToF = Time of Flight). The distance from the reference point to the product surface is measured. High-frequency pulses are injected to a probe and led along the probe. The pulses are reflected by the product surface, received by the electronic evaluation unit and converted into level information. This method is also known as TDR (Time Domain Reflectometry).

For interface applications this method is combined with a capacitive measurement.

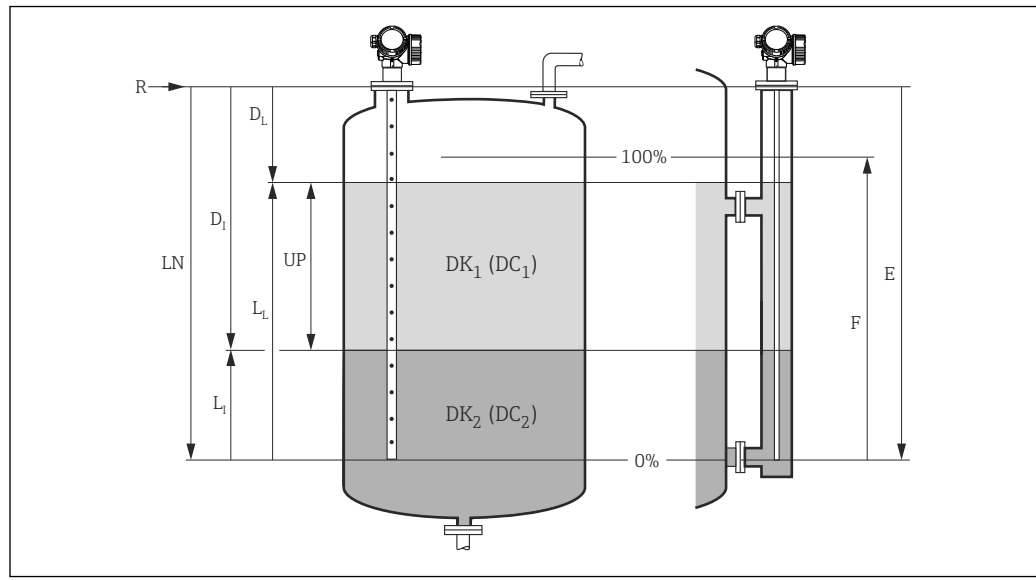

1 Parameters for level and interface measurement with the guided radar

- R Reference point of measurement
- E Empty calibration (= zero)
- F Full calibration (= span)
- LN Probe length
- UP Thickness upper medium
- DL Distace level complete
- LL Level complete
- DI Distance interface (distance flange / DC_2)
- LI Level interface (distance probe end / DC_1)
- DC1 Dielectric constant of the upper medium
- DC2 Dielectric constant of the lower medium

Dielectric constant

The dielectric constant (DC) of the medium has a direct impact on the degree of reflection of the highfrequency pulses. In the case of large DC values, such as for water or ammonia, there is strong pulse reflection while, with low DC values, such as for hydrocarbons, weak pulse reflection is experienced.

Input

The reflected pulses are transmitted from the probe to the electronics. There, a microprocessor analyzes the signals and identifies the level echo which was generated by the reflection of the high-frequency pulses at the product surface. This clear signal detection system benefits from over 30 years' experience with pulse time-of-flight procedures that have been integrated into the development of the PulseMaster® software.

The distance D to the product surface is proportional to the time of flight t of the impulse:


$$D = c \cdot t/2,$$

where c is the speed of light.

Based on the known empty distance E, the level L is calculated:

$$L = E - D$$

The reference point R of the measurement is located at the process connection. For details see the dimensional drawing:

FMP55: →  53

The Levelflex possesses functions for interference echo suppression that can be activated by the user. They guarantee that interference echoes from e.g. internals and struts are not interpreted as level echoes.


Output

The Levelflex is preset at the factory to the probe length ordered so that in most cases only the application parameters that automatically adapt the device to the measuring conditions need to be entered. For models with a current output, the factory adjustment for zero point E and span F is 4 mA and 20 mA, for digital outputs and the display module 0 % and 100 %. A linearization function with max. 32 points, which is based on a table entered manually or semi-automatically, can be activated on site or via remote operation. This function allows the level to be converted into units of volume or mass, for example.

Interface measurement

When the high-frequency pulses hit the surface of the medium, only a percentage of the transmission pulse is reflected. In the case of media with a low DC_1 , in particular, the other part penetrates the medium. The pulse is reflected once more at the interface point to a second medium with a higher DC_2 . The distance to the interface layer now can also be determined taking into account the delayed time-of-flight of the pulse through the upper medium.

In addition to this, FMP55 measures the capacitance of the probe. This enables interface measurements even if the second echo is missing due to an emulsion layer between the two phases.

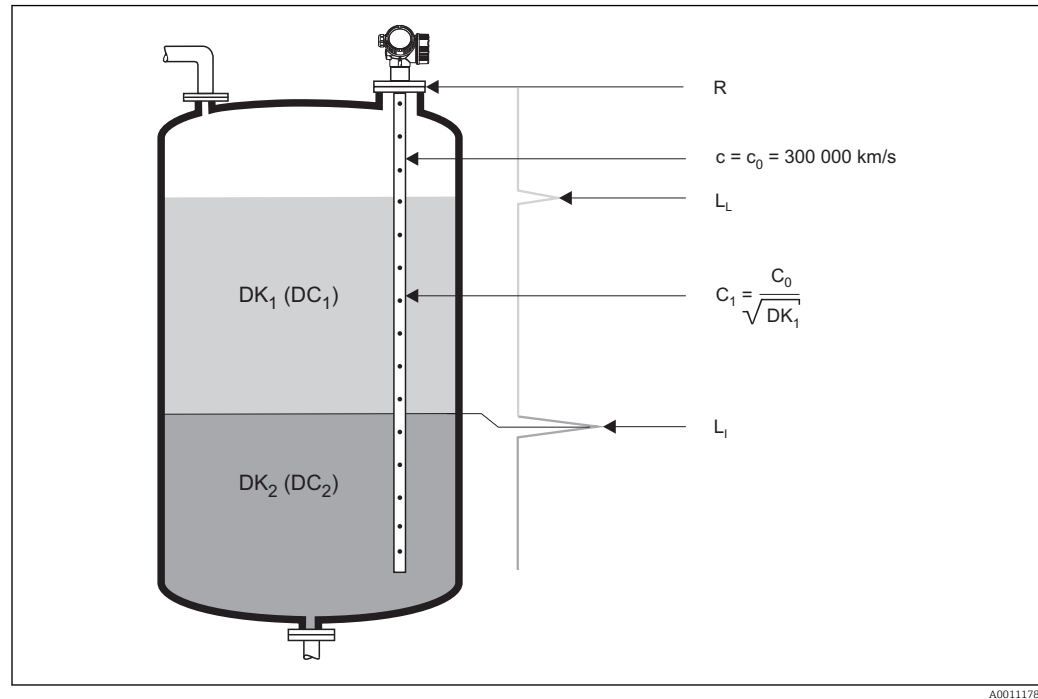

2 Interface measurement with the guided radar

- LL Level complete
LI Level interface
R Reference point of measurement

In addition, the following general conditions must be observed for interface measurement:

- The DC of the upper medium must be known and constant ¹⁾. The DC can be determined with the aid of the DC manual CP00019F or the "DC Values App". In addition, if the interface thickness is existing and known, the DC can be calculated automatically via FieldCare.
- The DC of the upper medium may not be greater than 10.
- The DC difference between the upper medium and lower medium must be >10.
- The upper medium must have a minimum thickness of 60 mm (2.4 in).

i For dielectric constants (DC values) of many media commonly used in various industries refer to:

- the Endress+Hauser DC manual (CP01076F)
- the Endress+Hauser "DC Values App" (available for Android and iOS)

When using the capacitive measurement of FMP55:

- Conductivity of the upper medium: < 1 µS/cm
- Conductivity of the lower medium: > 100 µS/cm

1) For FMP55: Under certain conditions measurement is possible even with a changing DC. For details please contact your Endress+Hauser representative.

Life cycle of the product

Engineering

- Universal measuring principle
- Measurement unaffected by medium properties
- Hardware and software developed according to SIL IEC 61508
- Genuine, direct interface measurement

Procurement

- Endress+Hauser being the world market leader in level measurement guarantees asset protection
- Worldwide support and service

Installation

- Special tools are not required
- Reverse polarity protection
- Modern, detachable terminals
- Main electronics protected by a separate connection compartment

Commissioning

- Fast, menu-guided commissioning in only 6 steps
- Plain text display in national languages reduces the risk of error or confusion
- Direct local access of all parameters
- Short instruction manual at the device

Operation

- SensorFusion provides redundant measurement for highest safety
- Multi-echo tracking: Reliable measurement through self-learning echo-search algorithms taking into account the short-term and long-term history in order to check the found echoes for plausibility and to suppress interference echoes.
- Diagnostics in accordance with NAMUR NE107

Maintenance

- HistoROM: Data backup for instrument settings and measured values
- Exact instrument and process diagnosis to assist fast decisions with clear details concerning remedies
- Intuitive, menu-guided operating concept in national languages saves costs for training, maintenance and operation
- Cover of the electronics compartment can be opened in hazardous areas

Retirement

- Order code translation for subsequent models
- RoHS-conforming (Restriction of certain Hazardous Substances), unleaded soldering of electronic components
- Environmentally sound recycling concept



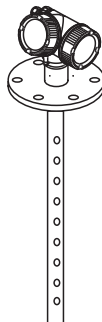

Measuring system

General notes on probe selection

- For interface measurement, ideally coax probes or rod probes in a bypass/stilling well are used.
- Coax probes are suited to liquids with viscosities of up to approx. 500 cst. Coax probes can measure most liquefied gases, as of a dielectric constant of 1.4. Moreover, installation conditions, such as nozzles, tank internal fittings etc., have no effect on the measurement when a coax probe is used. A coax probe offers maximum EMC safety when used in plastic tanks.
- Rod or rope probes for free installation in the tank not recommended.
Rope probes may also be used in a bypass/stilling well, if the distance to the ceiling is too small for mounting a rod probe and if it can be excluded that the rope or end-of-probe weight touches the wall of the tube (diameter large enough, precisely vertical tube).


Probe selection

The various types of probe in combination with the process connections are suitable for the following applications²⁾:
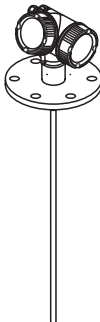
| Levelflex FMP55 | | | | | | |
|----------------------|--|------------------|--|----------------|--|-----------------|
| Type of probe | Rod probe | | Rope probe | | Coax probe | |
| |  A0011357 | |  A0011358 | |  A0011359 | |
| Feature 060 - Probe: | Option: | | Option: | | Option: | |
| | CA | 16 mm (PFA>316L) | NA | 4 mm (PFA>316) | UA | ... mm (316L) |
| | CB | 16 mm (PFA>316L) | ND | 1/6" (PFA>316) | UB | ... inch (316L) |
| Max. probe length | 4 m (13 ft) | | 10 m (33 ft) | | 6 m (20 ft) | |
| For application | <div>Level and interface measurement in liquids</div> <div> When using the remote sensor version → 38, only probe lengths up to 7 m (23 ft) can be ordered.</div> | | | | | |

2) If required, rod and rope probes can be replaced. They are secured with Nord-Lock washers or a thread coating. For further information on service and spare parts please contact the Endress+Hauser service.


Input

| | |
|--------------------------|---|
| Measured variable | <p>The measured variable is the distance between the reference point and the product surface.</p> <p>Subject to the empty distance entered "E" the level is calculated.</p> <p>Alternatively, the level can be converted into other variables (volume, mass) by means of linearization (32 points).</p> |
| Measuring range | <p>The maximum measuring range is:</p> <ul style="list-style-type: none"> ■ for rope probe in bypass or stilling well up to 10 m (33 ft) ■ for rod probe in bypass or stilling well up to 4 m (13 ft) ■ for coax probe up to 6 m (20 ft) <p> ■ Reduction of the max. possible measuring range through buildup, above all of moist products.</p> <p>■ Due to the high diffusion rate of ammonia it is recommended with gas-tight bushing³⁾ for measurements in this medium.</p> |

3) optionally available for FMP55

Blocking distance

The upper blocking distance (= UB) is the minimum distance from the reference point of the measurement (mounting flange) to the maximum level.

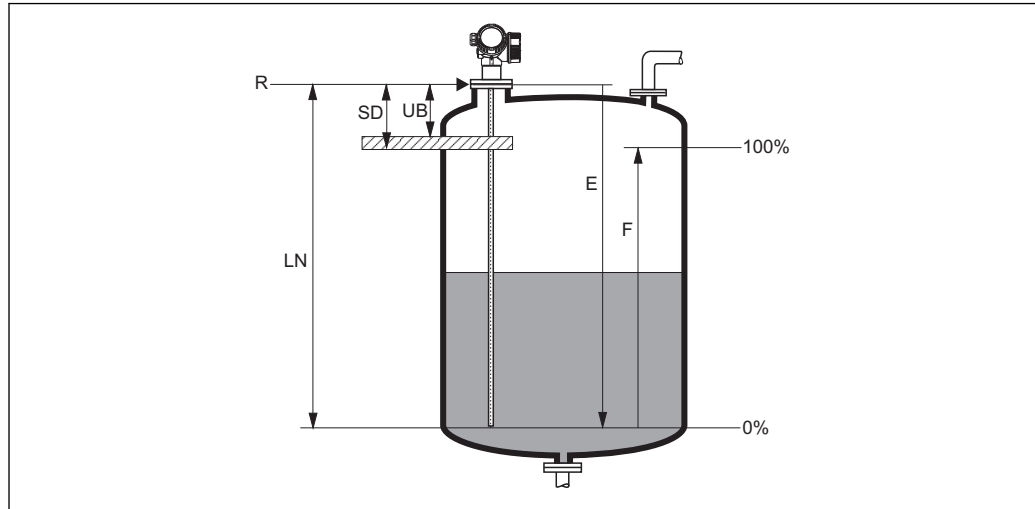

A0011279

3 Definition of blocking distance and safety distance

R Reference point of measurement

LN Probe length

UB Upper blocking distance

E Empty calibration (= zero)

F Full calibration (= span)

SD Safety distance

Blocking distance (factory setting):

- with coax probes: 0 mm (0 in)
- with rod and rope probes up to 8 m (26 ft): 200 mm (8 in)
- with rod and rope probes exceeding a length of 8 m (26 ft): $0.025 \cdot (\text{length of probe})$

i The specified blocking distances are preset on delivery. Depending on the application these settings can be changed.

Within the blocking distance, a reliable measurement can not be guaranteed.

i A safety distance SD can be defined in addition to the blocking distance. A warning is generated if the level rises into this safety distance.

Measuring frequency spectrum

100 MHz to 1.5 GHz

Output

Output signal

HART

| | |
|------------------------|----------------------------------|
| Signal coding | FSK ±0.5 mA over currency signal |
| Data transmission rate | 1200 Baud |
| Galvanic isolation | Yes |


PROFIBUS PA

| | |
|------------------------|------------------------------|
| Signal coding | Manchester Bus Powered (MBP) |
| Data transmission rate | 31,25 KBit/s, voltage mode |
| Galvanic isolation | Yes |

FOUNDATION Fieldbus

| | |
|------------------------|------------------------------|
| Signal coding | Manchester Bus Powered (MBP) |
| Data transmission rate | 31,25 KBit/s, voltage mode |
| Galvanic isolation | Yes |

Switch output



For HART devices, the switch output is available as an option. See product structure, feature 20: "Power Supply, Output", option B: "2-wire; 4-20mA HART, switch output"

Devices with PROFIBUS PA and FOUNDATION Fieldbus always have a switch output.

| Switch output | |
|--------------------------------|---|
| Function | Open collector switching output |
| Switching behavior | Binary (conductive or non-conductive), switches when the programmable switch point is reached |
| Failure mode | non-conductive |
| Electrical connection values | $U = 10.4$ to 35 V_{DC} , $I = 0$ to 40 mA |
| Internal resistance | $R_i < 880 \Omega$ The voltage drop at this internal resistance has to be taken into account on planning the configuration. For example, the resulting voltage at a connected relay must be sufficient to switch the relay. |
| Insulation voltage | floating, Insulation voltage 1350 V_{DC} to power supply and 500 V_{AC} to ground |
| Switch point | freely programmable, separately for switch-on and switch-off point |
| Switching delay | freely programmable from 0 to 100 sec. , separately for switch-on and switch-off point |
| Number of switching cycles | corresponds to the measuring cycle |
| Signal source device variables | <ul style="list-style-type: none"> ■ Level linearized ■ Distance ■ Terminal voltage ■ Electronic temperature ■ Relative echo amplitude ■ Interface linearized ¹⁾ ■ Interface distance ¹⁾ ■ Upper interface thickness ¹⁾ ■ Relative interface amplitude ¹⁾ ■ Diagnostic values, Advanced diagnostics |
| Number of switching cycles | unlimited |

1) only if an interface measurement is active

Signal on alarm

Depending on the interface, failure information is displayed as follows:

- Current output (for HART devices)
 - Failsafe mode selectable (in accordance with NAMUR Recommendation NE 43):
Minimum alarm: 3.6 mA
Maximum alarm (= factory setting): 22 mA
 - Failsafe mode with user-selectable value: 3.59 to 22.5 mA
- Local display
 - Status signal (in accordance with NAMUR Recommendation NE 107)
 - Plain text display
- Operating tool via digital communication (HART, PROFIBUS PA, FOUNDATION Fieldbus) or service interface (CDI)
 - Status signal (in accordance with NAMUR Recommendation NE 107)
 - Plain text display

Linearization

The linearization function of the device allows the conversion of the measured value into any unit of length or volume. Linearization tables for calculating the volume in cylindrical tanks are pre-programmed. Other tables of up to 32 value pairs can be entered manually or semi-automatically.

Galvanic isolation

All circuits for the outputs are galvanically isolated from each other.

Protocol-specific data

HART

| | |
|------------------------------------|--|
| Manufacturer ID | 17 (0x11) |
| Device type ID | 0x34 |
| HART specification | 6.0 |
| Device description files (DTM, DD) | Information and files at: <ul style="list-style-type: none"> ▪ www.endress.com ▪ www.hartcomm.org |
| HART load | Min. 250 Ω |
| HART device variables | <p>The measured values can be freely assigned to the device variables.</p> <p>Measured values for PV (primary variable)</p> <ul style="list-style-type: none"> ▪ Level linearized ▪ Distance ▪ Interface ▪ Interface distance ▪ Upper interface thickness ▪ Electronic temperature ▪ Measured capacity ▪ Relative echo amplitude ▪ Relative interface amplitude <p>Measured values for SV, TV, FV (second, third and fourth variable)</p> <ul style="list-style-type: none"> ▪ Level linearized ▪ Distance ▪ Interface linearized ▪ Interface distance ▪ Upper interface thickness ▪ Terminal voltage ▪ Electronic temperature ▪ Measured capacity ▪ Absolute echo amplitude ▪ Relative echo amplitude ▪ Absolute interface amplitude ▪ Relative interface amplitude ▪ Calculated DC |
| Supported functions | <ul style="list-style-type: none"> ▪ Burst mode ▪ Additional transmitter status |

Wireless HART data

| | |
|----------------------------------|--------|
| Minimum start-up voltage | 11.4 V |
| Start-up current | 3.6 mA |
| Start-up time | 15 s |
| Minimum operating voltage | 11.4 V |
| Multidrop current | 3.6 mA |
| Set-up time | 1 s |

PROFIBUS PA

| | |
|---------------------|---|
| Manufacturer ID | 17 (0x11) |
| Ident number | 0x1558 |
| Profile version | 3.02 |
| GSD file | Information and files at: |
| GSD file version | <ul style="list-style-type: none"> ▪ www.endress.com ▪ www.profibus.org |
| Output values | <p>Analog Input:</p> <ul style="list-style-type: none"> ▪ Level linearized ▪ Distance ▪ Interface ▪ Interface distance ▪ Upper interface thickness ▪ Terminal voltage ▪ Electronic temperature ▪ Measured capacity ▪ Absolute echo amplitude ▪ Relative echo amplitude ▪ Absolute interface amplitude ▪ Relative interface amplitude ▪ Calculated DC <p>Digital Input:</p> <ul style="list-style-type: none"> ▪ Extended diagnostic blocks ▪ Status output PFS Block |
| Input values | <p>Analog Output:</p> <ul style="list-style-type: none"> ▪ Analog value from PLC (for sensor block external pressure and temperature) ▪ Analog value from PLC to be indicated on the display <p>Digital Output:</p> <ul style="list-style-type: none"> ▪ Extended diagnostic block ▪ Level limiter ▪ Sensor block measurement on ▪ Sensor block save history on ▪ Status output |
| Supported functions | <ul style="list-style-type: none"> ▪ Identification & Maintenance Simple device identification via control system and nameplate ▪ Automatic Ident Number Adoption GSD compatibility mode with respect to the previous device Levelflex M FMP4x ▪ Physical Layer Diagnostics Installation check of the PROFIBUS segment and the Levelflex FMP4x via terminal voltage and telegram monitoring ▪ PROFIBUS Up-/Download Up to 10 times faster reading and writing of parameters via PROFIBUS Up-/Download ▪ Condensed Status Simple and self-explanatory diagnostic information due to categorization of diagnostic messages |

FOUNDATION Fieldbus

| | |
|---|---|
| Manufacturer ID | 0x452B48 |
| Device type | 0x1022 |
| Device Revision | 0x01 |
| DD Revision | Information and files at: <ul style="list-style-type: none"> ■ www.endress.com ■ www.fieldbus.org |
| CFF Revision | |
| Device Tester Version (ITK Version) | 6.01 |
| ITK Test Campaign Number | IT080500 |
| Link Master (LAS) capable | yes |
| Link Master / Basic Device selectable | yes; default: Basic Device |
| Node address | Default: 247 (0xF7) |
| Features supported | Following methods are supported: <ul style="list-style-type: none"> ■ Restart ■ ENP Restart ■ Setup ■ Linearization ■ Self Check |
| Virtual Communication Relationships (VCRs) | |
| Number of VCRs | 44 |
| Number of Link Objects in VFD | 50 |
| Permanent entries | 1 |
| Client VCRs | 0 |
| Server VCRs | 10 |
| Source VCRs | 43 |
| Sink VCRs | 0 |
| Subscriber VCRs | 43 |
| Publisher VCRs | 43 |
| Device Link Capabilities | |
| Slot time | 4 |
| Min. inter PDU delay | 8 |
| Max. response delay | 5 |

Transducer Blocks

| Block | Content | Output values |
|---------------------------------------|---|---|
| Setup Transducer Block | Contains all parameters for a standard commissioning procedure | <ul style="list-style-type: none"> ■ Level or volume ¹⁾ (Channel 1) ■ Distance (Channel 2) |
| Advanced Setup Transducer Block | Contains all parameters for a more detailed configuration of the device | no output values |
| Display Transducer Block | Contains all parameters for the configuration of the display module | no output values |
| Diagnostic Transducer Block | Contains diagnostic information | no output values |
| Expert Configuration Transducer Block | Contains parameters which require detailed knowledge of the functionalities of the device | no output values |
| Expert Information Transducer Block | Contains information about the state of the device | no output values |
| Service Sensor Transducer Block | Contains parameters which can only be operated by Endress+Hauser service personnel | no output values |
| Service Information Transducer Block | Contains information on the state of device which is relevant for service operations | no output values |
| Data Transfer Transducer Block | Contains parameters which allow to backup the device configuration in the display module and to restore it into the device. | no output values |

1) depending on the configuration of the block

Function Blocks

| Block | Content | Number of permanent blocks | Number of instantiable blocks | Execution time | Functionality |
|----------------------------|--|----------------------------|-------------------------------|----------------|---------------|
| Resource Block | The Resource Block contains all the data that uniquely identify the field device. It is an electronic version of a nameplate of the device. | 1 | 0 | - | enhanced |
| Analog Input Block | The AI block takes the manufacturer's input data, selected by channel number, and makes it available to other function blocks at its output. | 2 | 3 | 25 ms | enhanced |
| Discrete Input Block | The DI block takes a discrete input value (e.g. indication of an level limit), and makes it available to other function blocks at its output. | 1 | 2 | 20 ms | standard |
| PID Block | The PID block serves as proportional-integral-derivative controller and is used almost universally to do closed-loop-control in the field including cascade and feedforward. | 1 | 1 | 25 ms | standard |
| Arithmetic Block | This block is designed to permit simple use of popular measurement math functions. The user does not have to know how to write equations. The math algorithm is selected by name, chosen by the user for the function to be done. | 1 | 1 | 25 ms | standard |
| Signal Characterizer Block | The signal characterizer block has two sections, each with an output that is a non-linear function of the respective input. The non-linear function is determined by a single look-up table with 21 arbitrary x-y pairs. | 1 | 1 | 25 ms | standard |
| Input Selector Block | The input selector block provides selection of up to four inputs and generates an output based on the configured action. This block normally receives its inputs from AI blocks. The block performs maximum, minimum, middle, average and 'first good' signal selection. | 1 | 1 | 25 ms | standard |
| Integrator Block | The Integrator Function Block integrates a variable as a function of the time or accumulates the counts from a Pulse Input block. The block may be used as a totalizer that counts up until reset or as a batch totalizer that has a setpoint, where the integrated or accumulated value is compared to pre-trip and trip settings, generating discrete signals when these settings are reached. | 1 | 1 | 25 ms | standard |
| Analog Alarm Block | | 1 | 1 | 25 ms | standard |




Up to 20 blocks can be instantiated in the device altogether, including the blocks already instantiated on delivery.

Energieversorgung

Terminal assignment

2-wire: 4-20mA HART

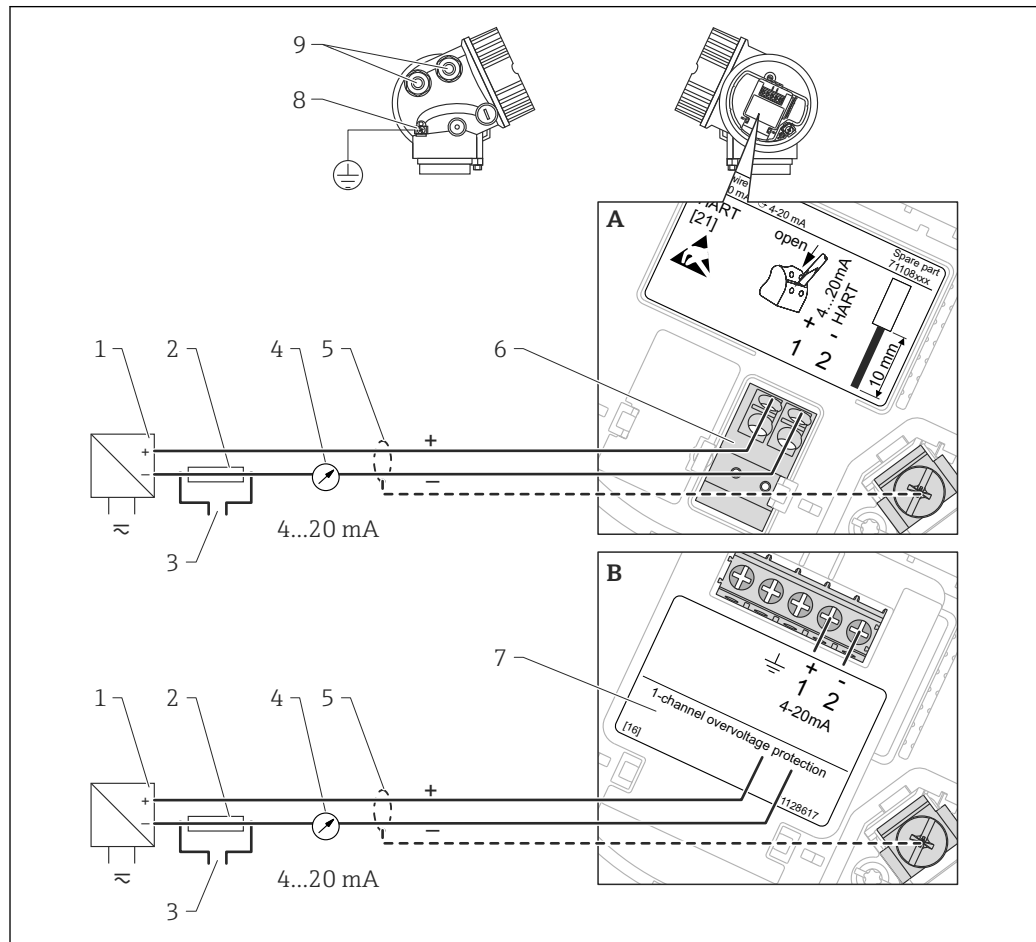

A0011294

4 Terminal assignment 2-wire; 4-20mA HART

A Without integrated overvoltage protection

B With integrated overvoltage protection

1 Active barrier with power supply (e.g. RN221N): Observe terminal voltage

2 HART communication resistor ($\geq 250 \Omega$): Observe maximum load

3 Connection for Commubox FXA195 or FieldXpert SFX350/SFX370 (via VIATOR Bluetooth modem)

4 Analog display device: Observe maximum load

5 Cable screen; observe cable specification


6 4-20mA HART (passive): Terminals 1 and 2

7 Overvoltage protection module

8 Terminal for potential equalization line

9 Cable entry

2-wire: 4-20mA HART, switch output

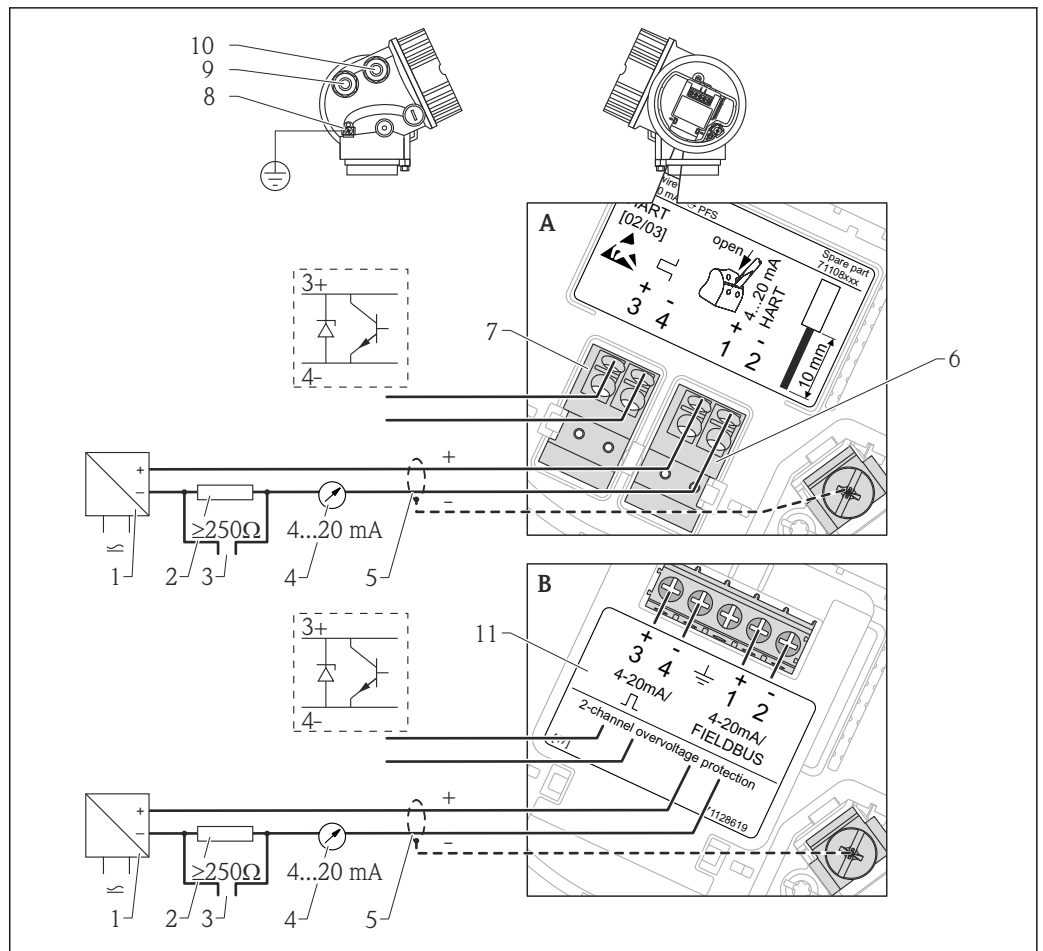


A0013759

5 Terminal assignment 2-wire; 4-20mA HART, switch output

- A Without integrated overvoltage protection
- B With integrated overvoltage protection
- 1 Active barrier with power supply (e.g. RN221N): Observe terminal voltage
- 2 HART communication resistor ($\geq 250 \Omega$): Observe maximum load
- 3 Connection for Commubox FXA195 or FieldXpert SFX350/SFX370 (via VIATOR Bluetooth modem)
- 4 Analog display device: Observe maximum load
- 5 Cable screen; observe cable specification
- 6 4-20mA HART (passive): Terminals 1 and 2
- 7 Switch output (open collector): Terminals 3 and 4
- 8 Terminal for potential equalization line
- 9 Cable entry for 4-20mA HART line
- 10 Cable entry for switch output line
- 11 Overvoltage protection module

2-wire: 4-20mA HART, 4-20mA

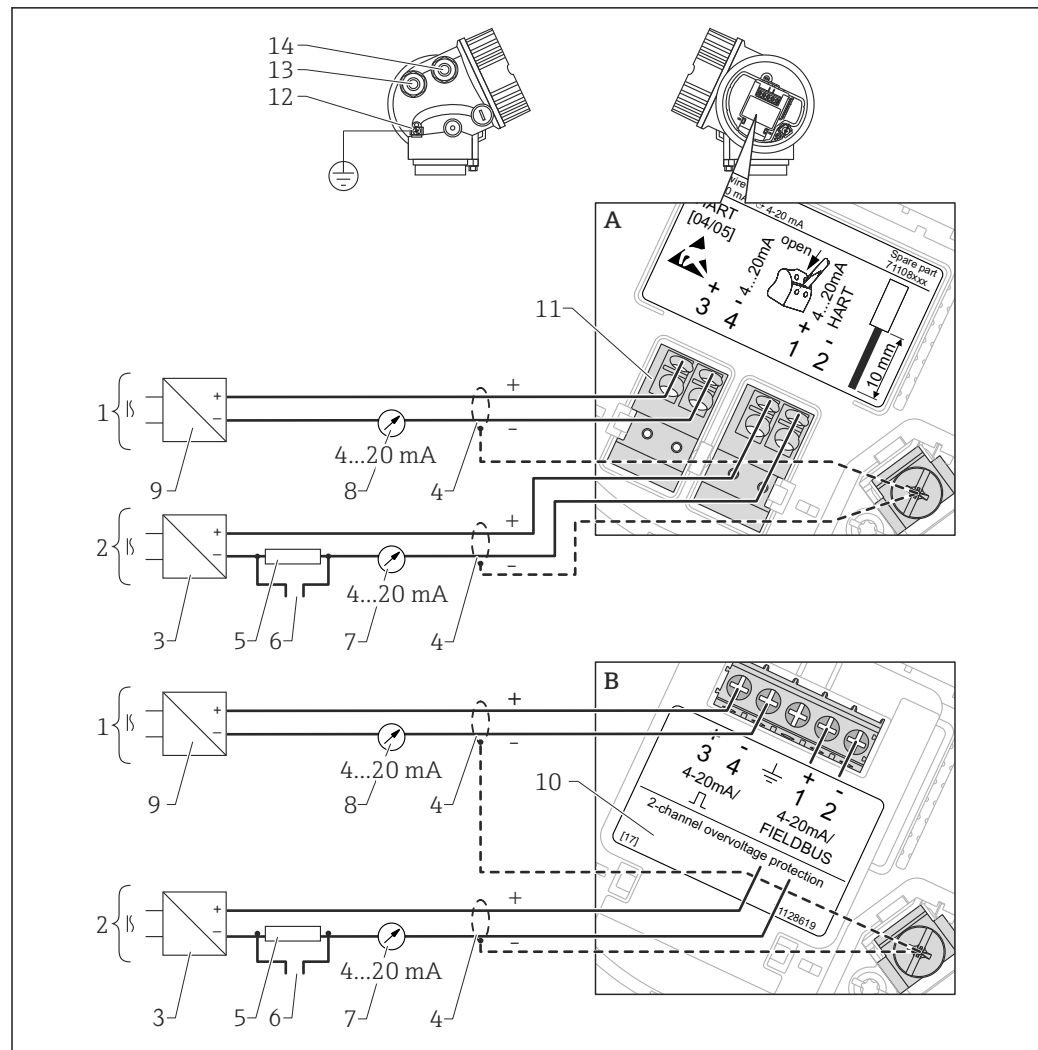

6 Terminal assignment 2-wire, 4-20 mA HART, 4...20mA

A Without integrated overvoltage protection

B With integrated overvoltage protection

1 Connection current output 2

2 Connection current output 1

3 Supply voltage for current output 1 (e.g. RN221N); Observe terminal voltage

4 Cable screen; observe cable specification

5 HART communication resistor ($\geq 250 \Omega$); Observe maximum load

6 Connection for Commubox FXA195 or FieldXpert SFX350/SFX370 (via VIATOR Bluetooth modem)

7 Analog display device ; observe maximum load

8 Analog display device ; observe maximum load

9 Supply voltage for current output 2 (e.g. RN221N); Observe terminal voltage

10 Overvoltage protection module

11 Current output 2: Terminals 3 and 4


12 Terminal for the potential equalization line

13 Cable entry for current output 1

14 Cable entry for current output 2

i This version is also suited for single-channel operation. In this case, current output 1 (terminals 1 and 2) must be used.

4-wire: 4-20mA HART (10.4 to 48 V_{DC})

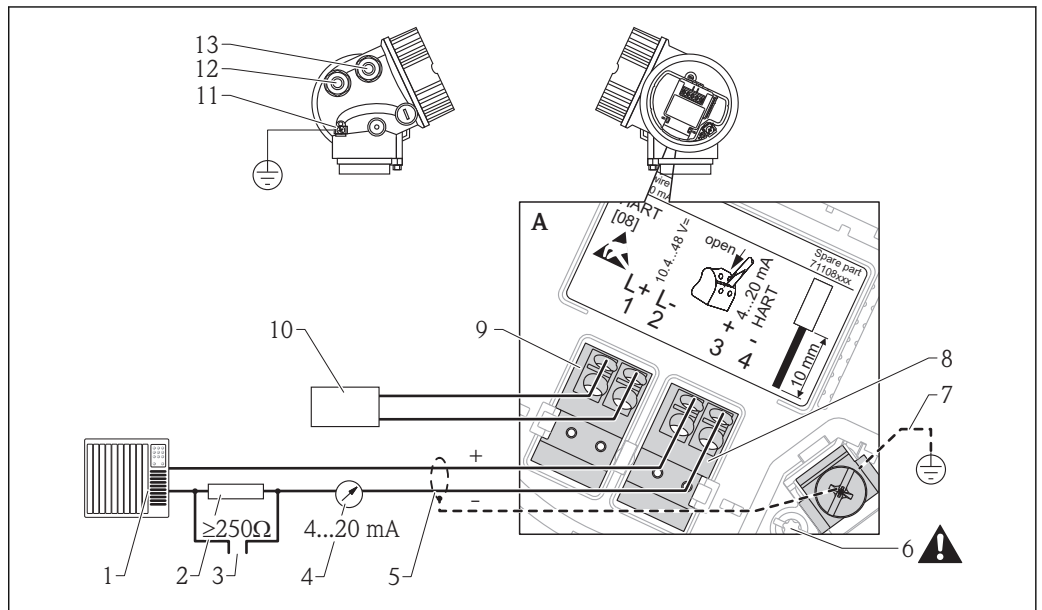


7 Terminal assignment 4-wire; 4-20mA HART (10.4 to 48 VDC)

- 1 Evaluation unit, e.g. PLC
- 2 HART communication resistor ($\geq 250 \Omega$): Observe maximum load
- 3 Connection for Commubox FXA195 or FieldXpert SFX350/SFX370 (via VIATOR Bluetooth modem)
- 4 Analog display device: Observe maximum load
- 5 Signal cable including screening (if required), observe cable specification
- 6 Protective connection; do not disconnect!
- 7 Protective earth, observe cable specification
- 8 4...20mA HART (active): Terminals 3 and 4
- 9 Supply voltage: Terminals 1 and 2
- 10 Supply voltage: Observe terminal voltage, observe cable specification
- 11 Terminal for potential equalization
- 12 Cable entry for signal line
- 13 Cable entry for power supply

A0011340

4-wire: 4-20mA HART (90 to 253 V_{AC})

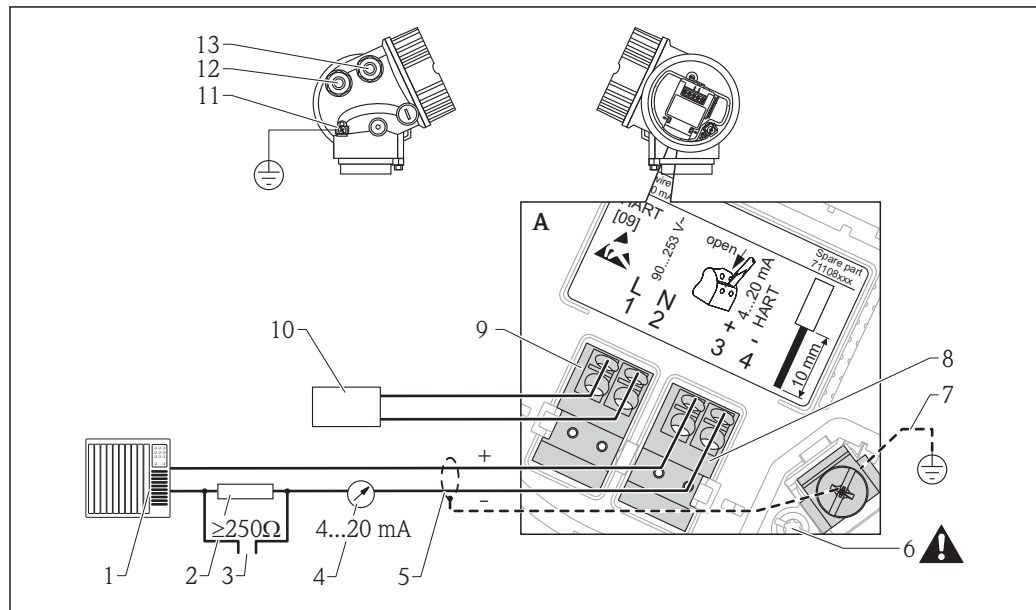

A0018965

8 Terminal assignment 4-wire; 4-20mA HART (90 to 253 VAC)

- 1 Evaluation unit, e.g. PLC
- 2 HART communication resistor ($\geq 250 \Omega$): Observe maximum load
- 3 Connection for Commubox FXA195 or FieldXpert SFX350/SFX370 (via VIATOR Bluetooth modem)
- 4 Analog display device: Observe maximum load
- 5 Signal cable including screening (if required), observe cable specification
- 6 Protective connection; do not disconnect!
- 7 Protective earth, observe cable specification
- 8 4...20mA HART (active): Terminals 3 and 4
- 9 Supply voltage: Terminals 1 and 2
- 10 Supply voltage: Observe terminal voltage, observe cable specification
- 11 Terminal for potential equalization
- 12 Cable entry for signal line
- 13 Cable entry for power supply


CAUTION

To ensure electrical safety:

- ▶ Do not disconnect the protective connection (6).
- ▶ Disconnect the supply voltage before disconnecting the protective earth (7).

- i** Connect protective earth to the internal ground terminal (7) before connecting the supply voltage. If necessary, connect the potential matching line to the external ground terminal (11).
- i** In order to ensure electromagnetic compatibility (EMC): Do not only ground the device via the protective earth conductor of the supply cable. Instead, the functional grounding must also be connected to the process connection (flange or threaded connection) or to the external ground terminal.
- i** An easily accessible power switch must be installed in the proximity of the device. The power switch must be marked as a disconnector for the device (IEC/EN61010).

PROFIBUS PA / FOUNDATION Fieldbus

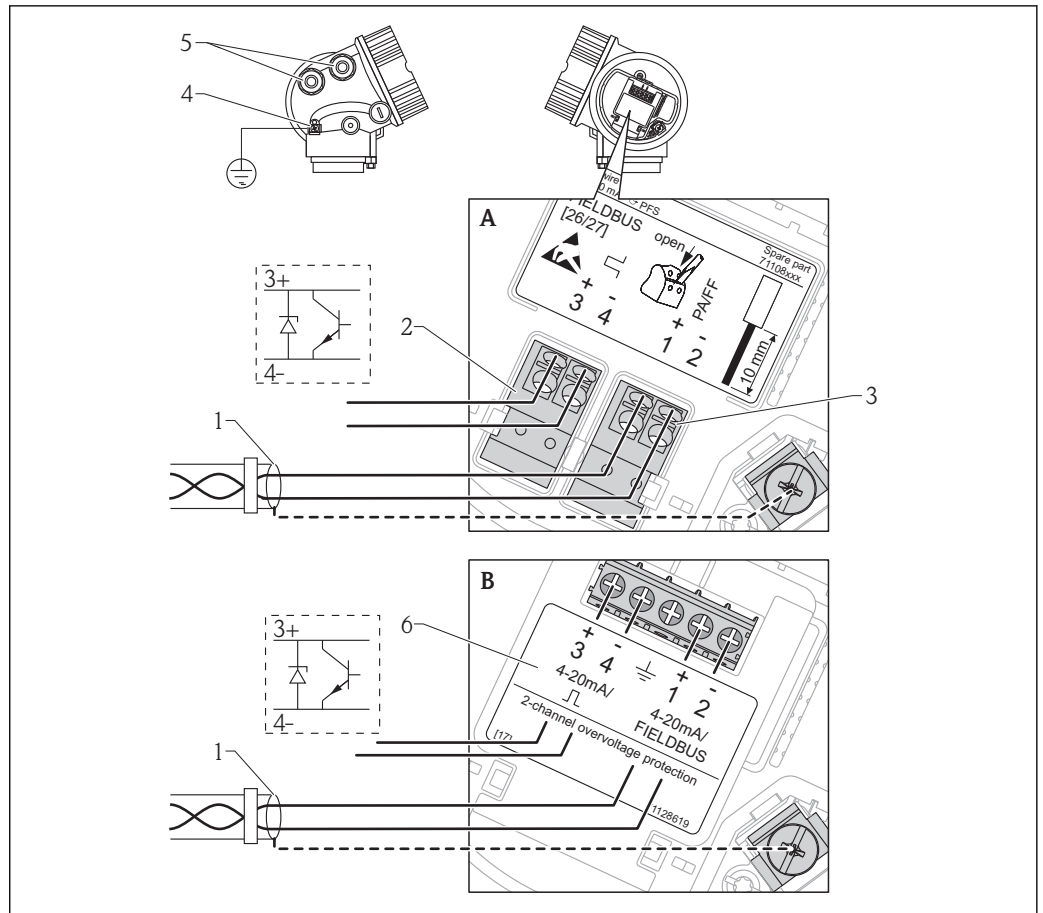


9 Terminal assignment PROFIBUS PA / FOUNDATION Fieldbus

- A Without integrated overvoltage protection
- B With integrated overvoltage protection
- 1 Cable screen: Observe cable specifications
- 2 Switch output (open collector): Terminals 3 and 4
- 3 PROFIBUS PA / FOUNDATION Fieldbus: Terminals 1 and 2
- 4 Terminal for potential equalization line
- 5 Cable entries
- 6 Overvoltage protection module

Connection examples for the switch output

i For HART devices, the switch output is available as an option. See product structure, feature 20: "Power Supply, Output", option B: "2-wire; 4-20mA HART, switch output"


Devices with PROFIBUS PA and FOUNDATION Fieldbus always have a switch output.

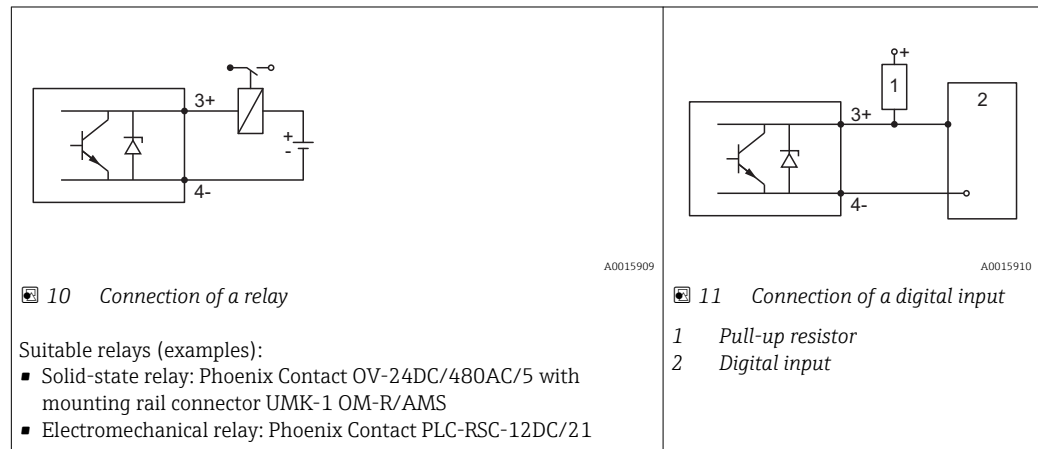

i For optimum interference immunity we recommend to connect an external resistor (internal resistance of the relay or Pull-up resistor) of $< 1\,000\ \Omega$.

HART loop converter HMX50

The dynamic variables of the HART protocol can be converted into individual 4 to 20 mA sections using the HART loop converter HMX50. The variables are assigned to the current output and the measuring ranges of the individual parameters are defined in the HMX50.

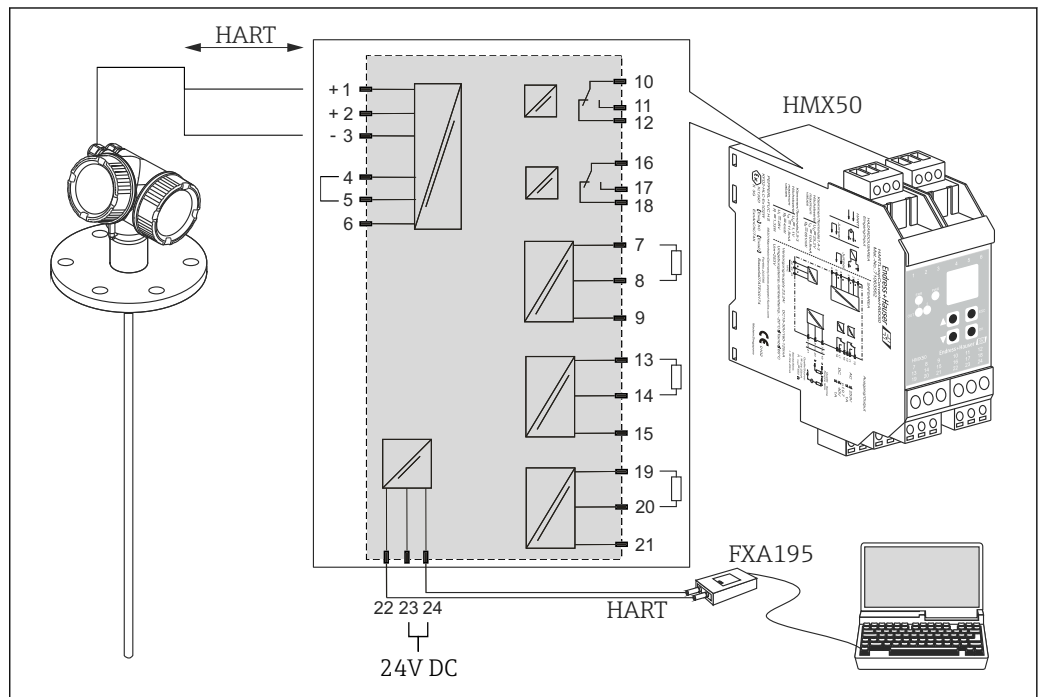

A0023287


12 Connection diagram for HART loop converter HMX50 (example: passive 2-wire device and current outputs connected as power source)

The HART loop converter HMX50 can be acquired using the order number 71063562.




Additional documentation: TI00429F and BA00371F.


Device plug connectors

 For the versions with fieldbus plug connector (M12 or 7/8"), the signal line can be connected without opening the housing.

Pin assignment of the M12 plug connector

|  <small>A0011175</small> | Pin | Meaning |
|--|-----|---------------|
| | 1 | Signal + |
| | 2 | not connected |
| | 3 | Signal - |
| | 4 | Ground |

Pin assignment of the 7/8" plug connector

|  <small>A0011176</small> | Pin | Meaning |
|--|-----|---------------|
| | 1 | Signal - |
| | 2 | Signal + |
| | 3 | Not connected |
| | 4 | Screen |

Power supply

An external power supply is required.



Various supply units can be ordered from Endress+Hauser: see "Accessories" section → 85

2-wire, 4-20mA HART, passive

2-wire; 4-20mA HART¹⁾

| "Approval" ²⁾ | Terminal voltage U at the device | Maximum load R, depending on the supply voltage U ₀ at the supply unit |
|---|----------------------------------|---|
| <ul style="list-style-type: none"> Non-Ex Ex nA CSA GP | 17.5 to 35 V | <p>A0014079</p> |
| Ex ic | 17.5 to 32 V | |
| Ex ia / IS | 17.5 to 30 V | |
| <ul style="list-style-type: none"> Ex d / XP Ex ic[ia] Ex tD / DIP | 18.5 to 30 V | <p>A0014080</p> |

1) Feature 020 of the product structure: option A

2) Feature 010 of the product structure

2-wire; 4-20 mA HART, switch output¹⁾



| "Approval" ²⁾ | Terminal voltage U at the device | Maximum load R, depending on the supply voltage U ₀ at the supply unit |
|--|----------------------------------|---|
| <ul style="list-style-type: none"> Non-Ex Ex nA Ex nA[ia] Ex ic Ex ic[ia] Ex d[ia] / XP Ex ta / DIP CSA GP | 12 to 35 V ³⁾ | <p>A0019136</p> |
| <ul style="list-style-type: none"> Ex ia / IS Ex ia + Ex d[ia] / IS + XP | 12 to 30 V ³⁾ | |

1) Feature 020 of the product structure: option B

2) Feature 010 of the product structure

3) For ambient temperatures $T_a \leq -30^\circ\text{C}$ (-22°F) a minimum voltage of 14 V is required for the startup of the device at the MIN error current (3.6 mA).

2-wire; 4-20mA HART, 4-20mA ¹⁾
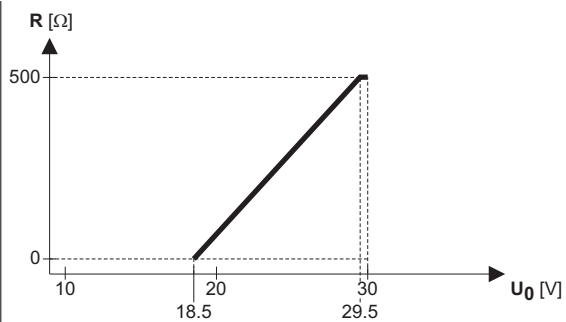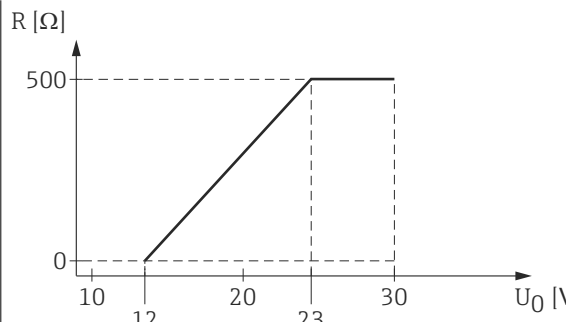
| "Approval" ²⁾ | Terminal voltage U at the device | Maximum load R, depending on the supply voltage U ₀ at the supply unit |
|--------------------------|-----------------------------------|---|
| alle | Channel 1: 18.5 to 30 V |  <div>A0014080</div> |
| | Channel 2: 12 to 30 V |  <div>A0022583</div> |

- 1) Feature 020 of the product structure: option C
- 2) Feature 010 of the product structure

| | |
|---|-------------------------|
| Polarity reversal protection | Yes |
| Admissible residual ripple at f = 0 to 100 Hz | U _{ss} < 1 V |
| Admissible residual ripple at f = 100 to 10000 Hz | U _{ss} < 10 mV |

4-wire, 4-20mA HART, active

| "Power supply; Output" ¹⁾ | Terminal voltage | Maximum load R _{max} |
|--|--|-------------------------------|
| K: 4-wire 90-253VAC; 4-20mA HART | 90 to 253 V _{AC} (50 to 60 Hz), overvoltage category II | 500 Ω |
| L: 4-wire 10,4-48VDC; 4-20mA HART | 10.4 to 48 V _{DC} | |

1) Feature 020 of the product structure

PROFIBUS PA, FOUNDATION Fieldbus

| "Power supply; Output" ¹⁾ | "Approval" ²⁾ | Terminal voltage |
|--|--|-------------------------|
| E: 2-wire; FOUNDATION Fieldbus, switch output G: 2-wire; PROFIBUS PA, switch output | <ul style="list-style-type: none"> ■ Non-Ex ■ Ex nA ■ Ex nA[ia] ■ Ex ic ■ Ex ic[ia] ■ Ex d[ia] / XP ■ Ex ta / DIP ■ CSA GP | 9 to 32 V ³⁾ |
| | <ul style="list-style-type: none"> ■ Ex ia / IS ■ Ex ia + Ex d[ia] / IS + XP | 9 to 30 V |

1) Feature 020 of the product structure

2) Feature 010 of the product structure

3) Input voltages up to 35 V will not spoil the device.

| | |
|--|-----|
| Polarity sensitive | No |
| FISCO/FNICO compliant according to IEC 60079-27 | Yes |

Power consumption

| "Power supply; Output" ¹⁾ | Power consumption |
|--|-------------------|
| A: 2-wire; 4-20mA HART | < 0.9 W |
| B: 2-wire; 4-20mA HART, switch output | < 0.9 W |
| C: 2-wire; 4-20mA HART, 4-20mA | < 2 x 0.7 W |
| K: 4-wire 90-253VAC; 4-20mA HART | 6 VA |
| L: 4-wire 10,4-48VDC; 4-20mA HART | 1.3 W |

1) Feature 020 of the product structure

Current consumption

HART

| | |
|--------------------------------------|--|
| Nominal current | 3.6 to 22 mA, the start-up current for multidrop mode can be parametrized (is set to 3.6 mA on delivery) |
| Breakdown signal (NAMUR NE43) | adjustable: 3.59 to 22.5 mA |

PROFIBUS PA

| | |
|---|-------|
| Nominal current | 18 mA |
| Error current FDE (Fault Disconnection Electronic) | 0 mA |

FOUNDATION Fieldbus

| | |
|--|-------|
| Device basic current | 15 mA |
| Error current FDE (Fault Disconnection Electronic) | 0 mA |

FISCO

| | |
|-------|------------|
| U_i | 17.5 V |
| I_i | 550 mA |
| P_i | 5.5 W |
| C_i | 5 nF |
| L_i | 10 μ H |

Power supply failure

- Configuration is retained in the HistoROM (EEPROM).
- Error messages (incl. value of operated hours counter) are stored.

Potential equalization

No special measures for potential equalization are required.



If the device is designed for hazardous areas, observe the information in the documentation "Safety Instructions" (XA, ZD).

Terminals

- **Without integrated overvoltage protection**
Plug-in spring terminals for wire cross-sections 0.5 to 2.5 mm² (20 to 14 AWG)
- **With integrated overvoltage protection**
Screw terminals for wire cross-sections 0.2 to 2.5 mm² (24 to 14 AWG)

Cable entries

Connection of power supply and signal line

To be selected in feature 050 "Electrical connection"

- Gland M20; Material dependent on the approval:
 - For Non-Ex, ATEX, IECEx, NEPSI Ex ia/ic:
Plastics M20x1.5 for cable ϕ 5 to 10 mm (0.2 to 0.39 in)
 - For Dust-Ex, FM IS, CSA IS, CSA GP, Ex nA:
Metal M20x1.5 for cable ϕ 7 to 10 mm (0.28 to 0.39 in)⁴⁾
 - For Ex d:
No gland available
- Thread
 - 1/2" NPT
 - G 1/2"
 - M20 \times 1.5
- Plug M12 / Plug 7/8"
Only available for Non-Ex, Ex ic, Ex ia

Connection of remote display FHX50

Dependent on feature 030: "Display, Operation":

- "Prepared for display FHX50 + M12 connection":
M12 socket
- "Prepared for display FHX50 + custom connection":
Thread M16

Cable specification

- Minimum cross-section: dependent on terminals \rightarrow 32
- For ambient temperature $T_U \geq 60^\circ\text{C}$ (140 $^\circ\text{F}$): use cable for temperature $T_U + 20\text{ K}$.

4) The material of the gland is dependent on the housing type; GT18 (stainless steel housing): 316L (1.4404); GT19 (plastic housing) and GT20 (aluminum housing): nickel-coated brass (CuZn).

HART

- A normal device cable suffices if only the analog signal is used.
- A shielded cable is recommended if using the HART protocol. Observe grounding concept of the plant.
- For 4-wire devices: Standard device cable is sufficient for the power line.

PROFIBUS

Use a twisted, screened two-wire cable, preferably cable type A.



For further information on the cable specifications, see Operating Instructions BA00034S "Guidelines for planning and commissioning PROFIBUS DP/PA", PNO Guideline 2.092 "PROFIBUS PA User and Installation Guideline" and IEC61158-2 (MBP).

FOUNDATION Fieldbus

Endress+Hauser recommends using twisted, shielded two-wire cables.



For further information on the cable specifications, see Operating Instructions BA00013S "FOUNDATION Fieldbus Overview", FOUNDATION Fieldbus Guideline and IEC 61158-2 (MBP).

Overvoltage protection

If the measuring device is used for level measurement in flammable liquids which requires the use of overvoltage protection according to DIN EN 60079-14, standard for test procedures 60060-1 (10 kA, pulse 8/20 µs), overvoltage protection has to be ensured by an integrated or external overvoltage protection module.

Integrated overvoltage protection

An integrated overvoltage protection module is available for 2-wire HART as well as PROFIBUS PA and FOUNDATION Fieldbus devices.

Product structure: Feature 610 "Accessory mounted", option NA "Overvoltage protection".

| Technical data | |
|--|---------------|
| Resistance per channel | 2 * 0.5 Ω max |
| Threshold DC voltage | 400 to 700 V |
| Threshold impulse voltage | < 800 V |
| Capacitance at 1 MHz | < 1.5 pF |
| Nominal arrest impulse voltage (8/20 µs) | 10 kA |

External overvoltage protection

HAW562 or HAW569 from Endress+Hauser are suited as external overvoltage protection.



For detailed information please refer to the following documents:

- HAW562: TI01012K
- HAW569: TI01013K

Performance characteristics

Reference operating conditions

- Temperature = +24 °C (+75 °F) ±5 °C (±9 °F)
- Pressure = 960 mbar abs. (14 psia) ±100 mbar (±1.45 psi)
- Humidity = 60 % ±15 %
- Reflection factor ≥ 0,8 (water surface for coax probe, metal plate for rod and rope probe with min. 1 m (40 in) diameter)
- Flange for rod or rope probe ≥ 300 mm (12 in) diameter
- Distance to obstacles ≥ 1 m (40 in)
- For interface measurement:
 - Coax probe
 - DC of the lower medium = 80 (water)
 - DC of the upper medium = 2 (oil)

Maximum measured error


Typical data under reference operating conditions: DIN EN 61298-2, percentage values in relation to the span.

| Output: | digital | analog ¹⁾ |
|---|--|----------------------|
| Sum of non-linearity, nonrepeatability and hysteresis | Level measurement: Measuring distance up to 10 m (33 ft): ±2 mm (0.08 in) | ±0.02 % |
| | Interface measurement: <ul style="list-style-type: none"> ■ Measuring distance up to 500 mm (19.7 in): ±20 mm (0.79 in) ■ Measuring distance >500 mm (19.7 in): ±10 mm (0.39 in) ■ If the thickness of the upper medium is <100 mm (3.94 in): ±40 mm (1.57 in) | |
| Offset / Zero | ±4 mm (0.16 in) | ±0.03 % |

1) Add error of the analogous value to the digital value.

If the reference conditions are not met, the offset/zero point arising from the mounting situation may be up to ±12 mm (0.47 in) for rope and rod probes. This additional offset/zero point can be compensated for by entering a correction (parameter "level correction") during commissioning.

Differing from this, the following measuring error is present in the vicinity of the lower probe end:

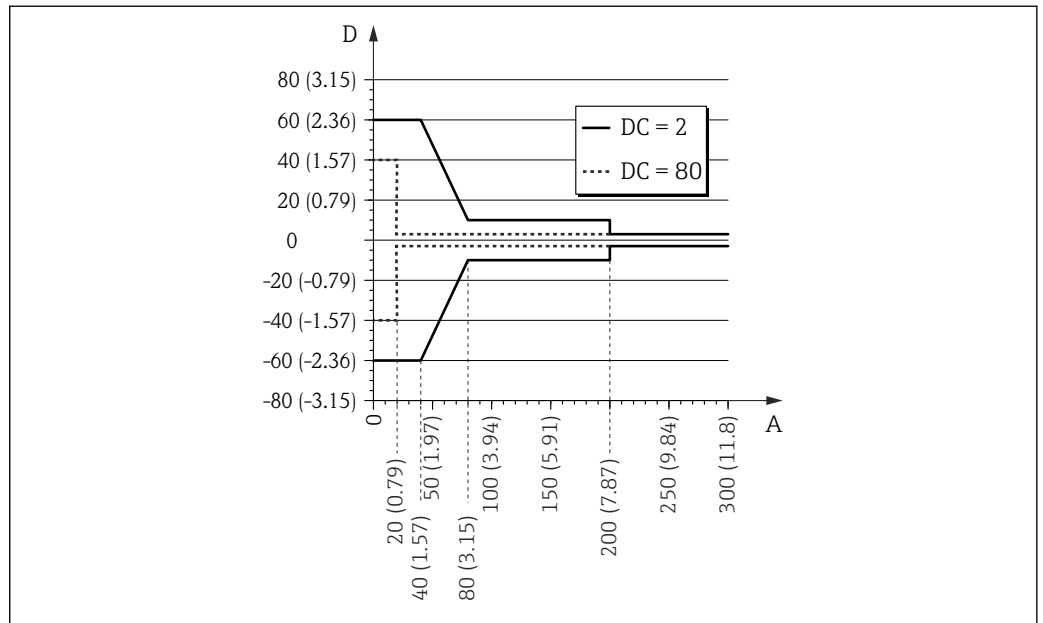


A0021480

13 Measuring error at the end-of-probe for rod and coax probes

A Distance from probe end [mm(in)]

D Measuring error: Sum of non-linearity, non-repeatability and hysteresis

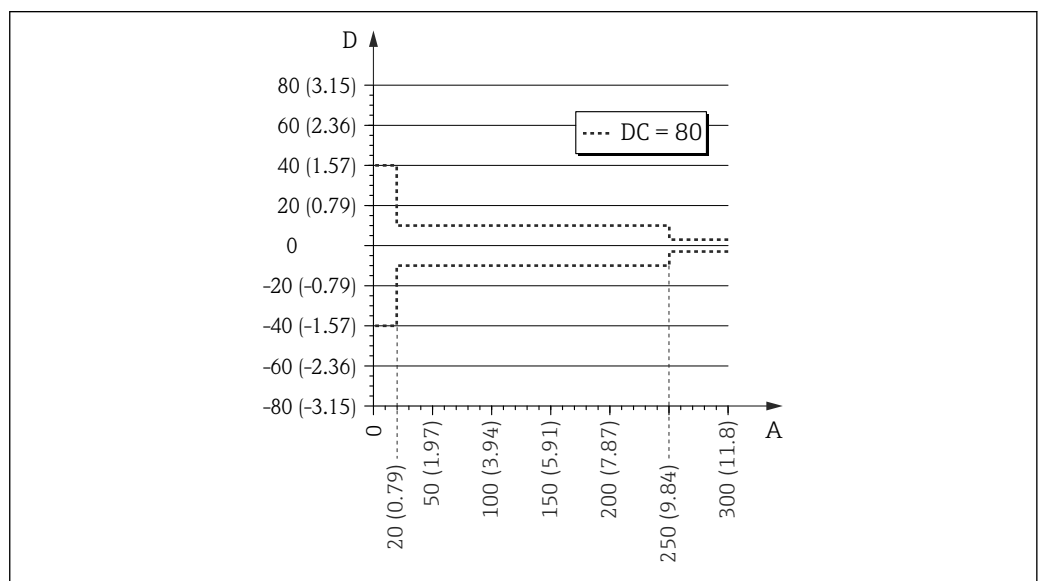

A0021482

14 Measuring error at the end-of-probe for rope probes


A Distance from probe end

D Measuring error: Sum of non-linearity, non-repeatability and hysteresis



If for rope probes the DC value is less than 7, then measurement is not possible in the area of the straining weight (0 to 250 mm from end of probe; lower blocking distance).

In the area of the upper probe end, the measuring error is as follows (rod/rope only):

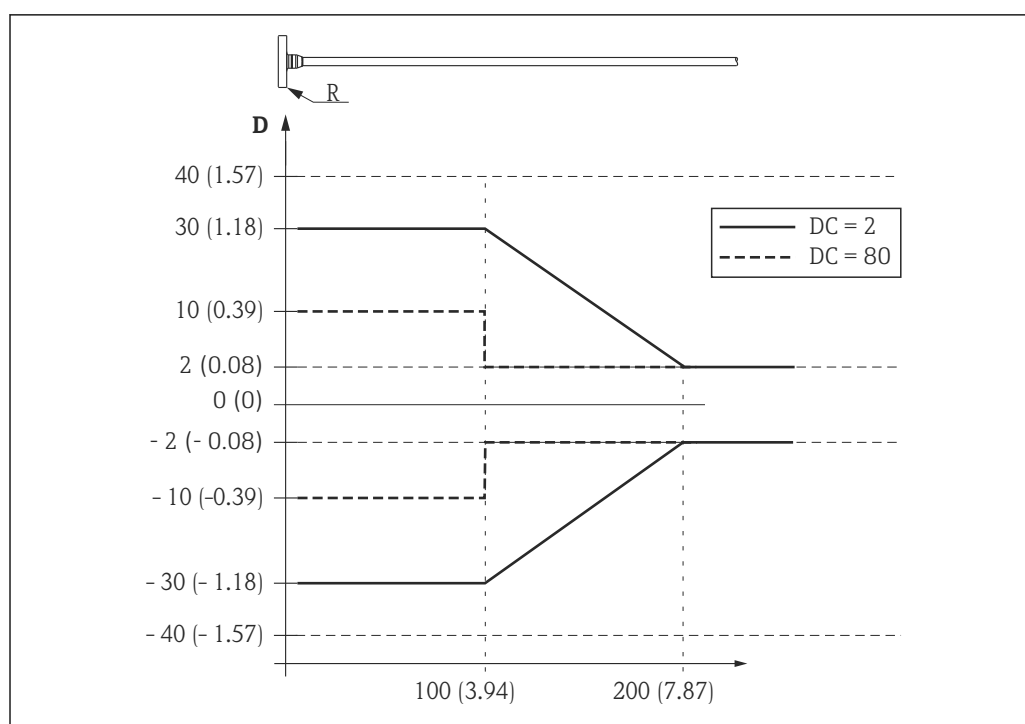

15 Measuring error at the upper end of the probe; dimensions: mm (in)

D Sum of non-linearity, non-repeatability and hysteresis

R Reference point of measurement

DC Dielectric constant

Resolution

- digital: 1 mm
- analog: 1 μ A

Reaction time

The reaction time can be parametrized. The following step response times (as per DIN EN 61298-2)⁵⁾ are valid if the damping is switched off:

| Level measurement | | |
|-------------------|-------------------------|--------------------|
| Probe length | Sampling rate | Step response time |
| < 10 m (33 ft) | 3.6 measurements/second | < 0.8 s |

| Interface measurement | | |
|-----------------------|--------------------------------|--------------------|
| Probe length | Sampling rate | Step response time |
| < 10 m (33 ft) | ≥ 1.1 measurements/second | < 2.2 s |

Influence of ambient temperature

The measurements are carried out in accordance with EN 61298-3

- digital (HART, PROFIBUS PA, FOUNDATION Fieldbus): average $T_K = 0.6$ mm/10 K
For devices with remote sensor⁶⁾ there is an additional offset of ± 0.3 mm/10K (± 0.01 in/10K) per 1 m (3.3 ft) of the remote cable.
- analog (current output):
 - zero point (4 mA): average $T_K = 0.02$ %/10 K
 - span (20 mA): average $T_K = 0.05$ %/10 K


5) According to DIN EN 61209-2 the response time is the time which passes after a sudden change of the input signal until the output signal for the first time assumes 90% of the steady-state value.

6) Product structure: Feature 600, options MB, MC or MD)

Mounting

Mounting requirements

Suitable mounting position

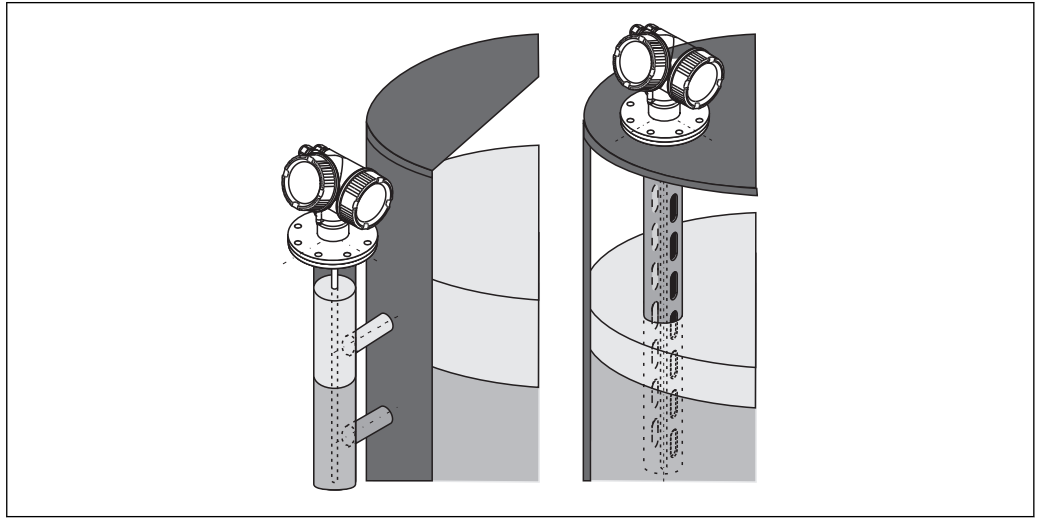

A0011281


16 Mounting position of Levelflex FMP55

- Rod probes / rope probes: must be mounted in a stilling well or bypass → 42.
- Coax probes: can be mounted at an arbitrary distance from the wall of the vessel.
- When mounting in the open, a weather protection cover may be installed to protect the device against extreme weather conditions.
- Minimum distance from the end of probe to the bottom of the vessel: 10 mm (0.4 in)

Applications with restricted mounting space

Mounting with remote sensor

The device version with a remote sensor is suited for applications with restricted mounting space. In this case the electronics housing is mounted at a separate position from which it is easier accessible.

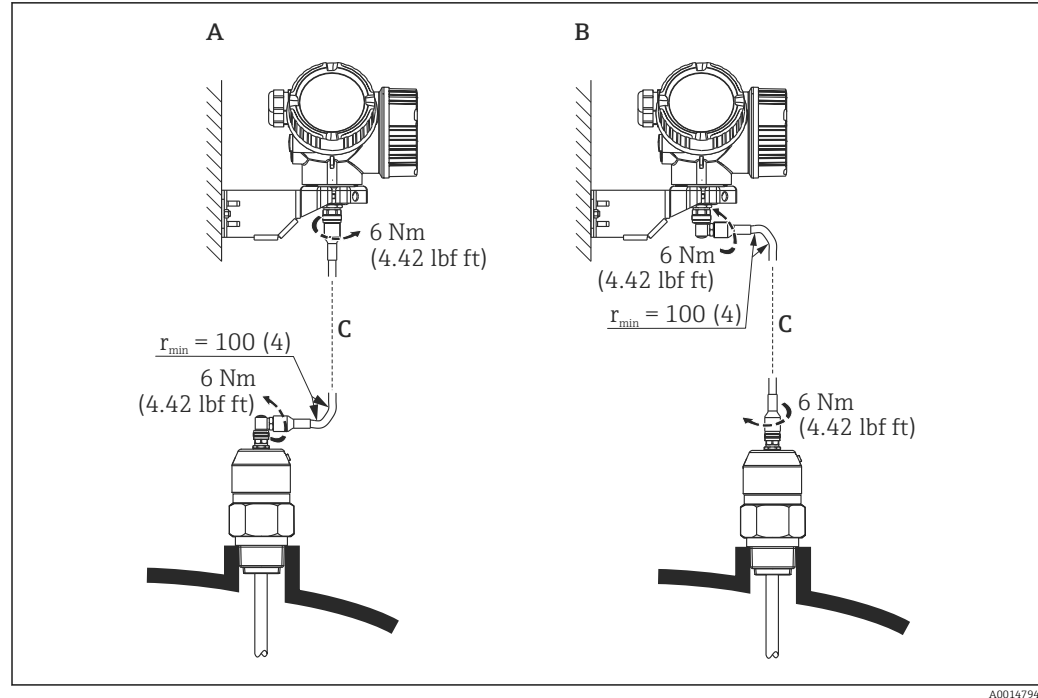

- A Angled plug at the probe
 B Angled plug at the electronics housing
 C Length of the remote cable as ordered

- Product structure, feature 600 "Probe Design":
 Option MB "Sensor remote, 3m/9ft cable"
 - The remote cable is supplied with these device versions
 Minimum bending radius: 100 mm (4 inch)
 - A mounting bracket for the electronics housing is supplied with these device versions. Mounting options:
 - Wall mounting
 - Pipe mounting; diameter: 42 to 60 mm (1-1/4 to 2 inch)
 - The connection cable has got one straight and one angled plug (90°). Depending on the local conditions the angled plug can be connected at the probe or at the electronics housing.
- i** Probe, electronics and connection cable are adjusted to match each other. They are marked by a common serial number. Only components with the same serial number shall be connected to each other.

Notes on the mechanical load of the probe

Tensile load limit of rope probes

| Sensor | Feature 060 | Probe | Tensile load limit [kN] |
|--------|-------------|-------------------------|-------------------------|
| FMP55 | NA, ND | Rope 4mm (1/6") PFA>316 | 2 |

Bending strength of rod probes

| Sensor | Feature 060 | Probe | Bending strength [Nm] |
|--------|-------------|---------------------------|-----------------------|
| FMP55 | CA, CB | Rod 16mm (0.63") PFA>316L | 30 |

Bending strength of coax probes

| Sensor | Feature 060 | Process connection | Probe | Bending strength [Nm] |
|--------|-------------|--------------------|----------------------|-----------------------|
| FMP55 | UA, UB | Flange | Coax 316L, Ø 42,4 mm | 300 |

Mounting cladded flanges




- Use flange screws according to the number of flange holes.
- Tighten the screws with the required torque (see table).
- Retighten the screws after 24 hours or after the first temperature cycle.
- Depending on process pressure and process temperature check and retighten the screws at regular intervals.

| Flange size | Number of screws | Recommended torque [Nm] | |
|-------------|------------------|-------------------------|---------|
| | | minimum | maximum |
| EN | | | |
| DN40/PN40 | 4 | 35 | 55 |
| DN50/PN16 | 4 | 45 | 65 |
| DN50/PN40 | 4 | 45 | 65 |
| DN80/PN16 | 8 | 40 | 55 |
| DN80/PN40 | 8 | 40 | 55 |
| DN100/PN16 | 8 | 40 | 60 |
| DN100/PN40 | 8 | 55 | 80 |
| DN150/PN16 | 8 | 75 | 115 |
| DN150/PN40 | 8 | 95 | 145 |
| ASME | | | |
| 1½"/150lbs | 4 | 20 | 30 |
| 1½"/300lbs | 4 | 30 | 40 |
| 2"/150lbs | 4 | 40 | 55 |
| 2"/300lbs | 8 | 20 | 30 |
| 3"/150lbs | 4 | 65 | 95 |
| 3"/300lbs | 8 | 40 | 55 |
| 4"/150lbs | 8 | 45 | 70 |
| 4"/300lbs | 8 | 55 | 80 |
| 6"/150lbs | 8 | 85 | 125 |
| 6"/300lbs | 12 | 60 | 90 |
| JIS | | | |
| 10K 40A | 4 | 30 | 45 |
| 10K 50A | 4 | 40 | 60 |
| 10K 80A | 8 | 25 | 35 |
| 10K 100A | 8 | 35 | 55 |
| 10K 100A | 8 | 75 | 115 |

Securing the probe

Securing coax probes

For WHG approvals: For probe lengths ≥ 3 m (10 ft) a support is required.

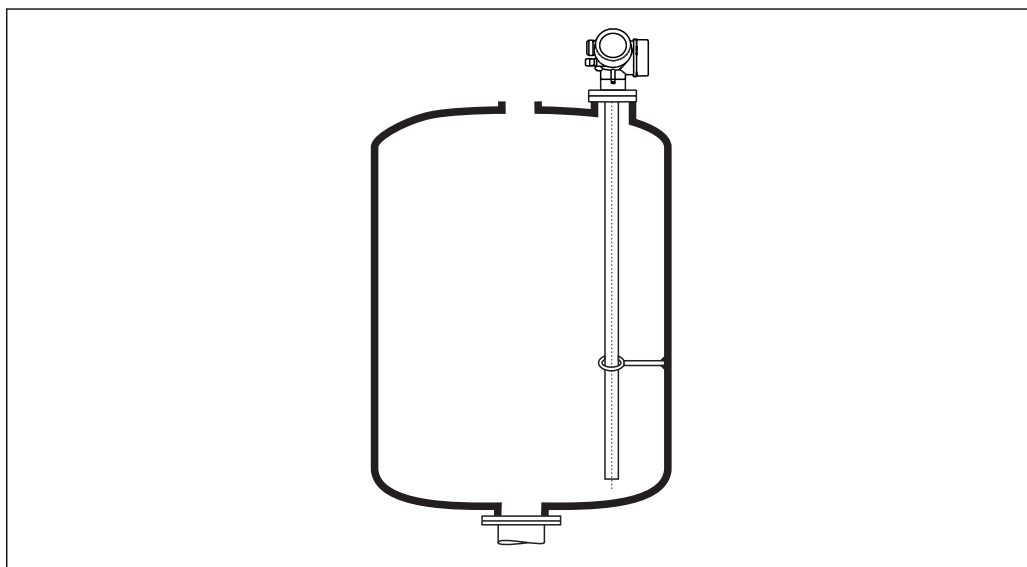

A0012608


Coax probes can be supported at any point of the outer tube.

Special mounting conditions

Bypasses and stilling wells



In bypass and stilling well applications it is recommended to use a centering disks or stars.

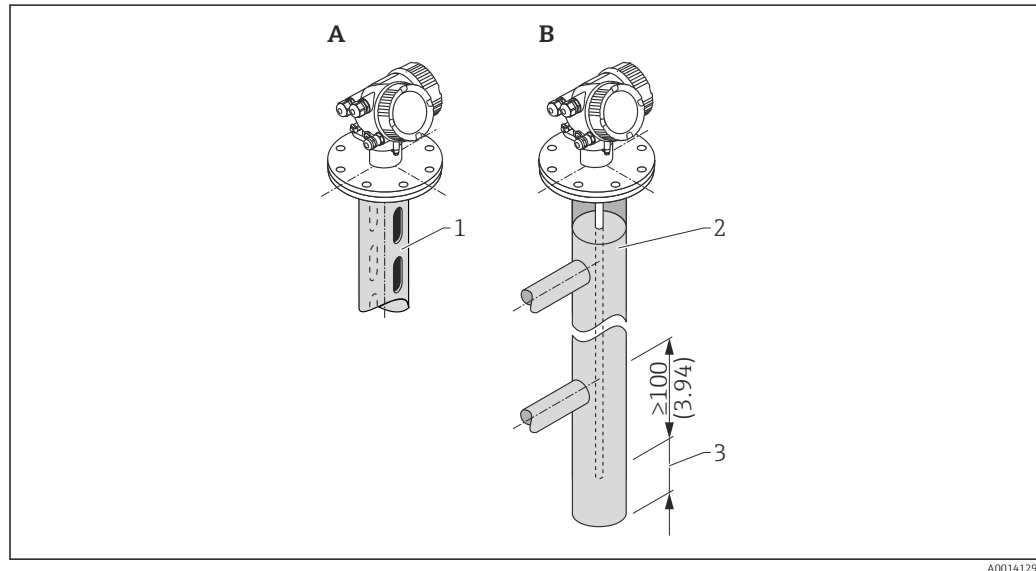

A0014129

1 Mounting in a stilling well

2 Mounting in a bypass


3 Minimum distance between end of probe and lower edge of the bypass; see table below

Minimum distance between end of probe and lower edge of the bypass


| Type of probe | Minimum distance |
|---------------|------------------|
| Rope | 150 mm (6 in) |
| Rod | 10 mm (0.4 in) |
| Coax | 10 mm (0.4 in) |


- Pipe diameter: > 40 mm (1.6") for rod probes
- Rod probe installation can take place up to a diameter size of 150 mm (6 in). In the event of larger diameters, a coax probe is recommended.
- Side disposals, holes or slits and welded joints that protrude up to approx. 5 mm (0.2") inwards do not influence the measurement.
- The pipe may not exhibit any steps in diameter.
- The probe must be 100 mm longer than the lower disposal.

- Within the measuring range, the probe must not get into contact with the pipe wall. If necessary, secure the probe by retaining or tensioning. All rope probes are prepared for tensioning in containers (tensioning weight with anchor hole).
- Within the measuring range, the probe must not get into contact with the pipe wall. If necessary, use a PFA centering star (see feature 610 of the product structure).
- Coax probes can always be applied if there is enough mounting space.


 For bypasses with condensate formation (water) and a medium with low dielectric constant (e.g. hydrocarbons):

In the course of time the bypass is filled with condensate up to the lower disposal and for low levels the the level echo is superimposed by the condensate echo. Thus in this range the condensate level is measured instead of the correct level. Only higher levels are measured correctly. To prevent this, position the lower disposal 100 mm (4 in) below the lowest level to be measured and apply a metallic centering disk at the height of the lower edge of the lower disposal.

 With heat insulated tanks the bypass should also be insulated in order to prevent condensate formation.

 For information on bypass solutions from Endress+Hauser please contact your Endress+Hauser sales representative.

Underground tanks

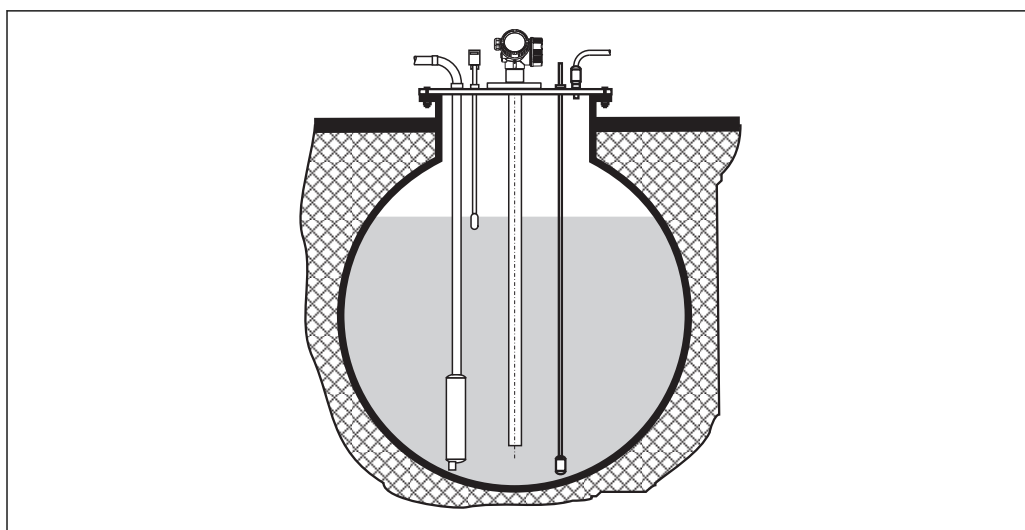

A0014142

Use a coax probe for nozzles with large diameters in order to avoid reflections at the nozzle wall.


Non-metallic vessels

When mounting Levelflex in a non-metallic vessel, use a coax probe.

Vessels with heat insulation



If process temperatures are high, the device must be included in normal tank insulation to prevent the electronics heating up as a result of heat radiation or convection. The insulation may not exceed beyond the points labeled "MAX" in the drawings.

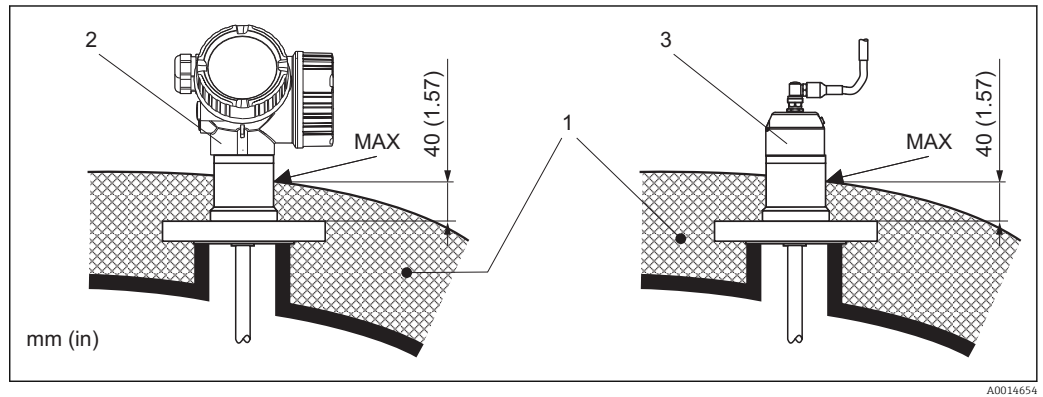

A0014654

17 Process connection with flange - FMP55

- 1 Tank insulation
- 2 Compact device
- 3 Sensor remote (feature 600)

Operating conditions: Environment

| | | |
|----------------------------------|--|--|
| Ambient temperature range | Measuring device | -40 to +80 °C (-40 to +176 °F) |
| | Local display | -20 to +70 °C (-4 to +158 °F), the readability of the display may be impaired at temperatures outside the temperature range. |
| | Connection cable (for "Probe Design" = "Sensor remote") | max. 100 °C (212 °F) |
| | Remote display FHX50 | -40 to 80 °C (-40 to 176 °F) |


When operating the device in the open with strong sunlight:

- Mount the device in a shady position.
- Avoid direct sunlight, especially in warmer regions.
- Use a weather protection cover (see accessories).

Ambient temperature limits The following diagrams take into account only function requirements. There may be further restrictions for certified device versions. Please refer to the separate Safety Instructions →  87.

With a temperature (T_p) at the process connection the admissible ambient temperature (T_a) is reduced according to the following diagram (temperature derating):

Temperature derating for FMP55

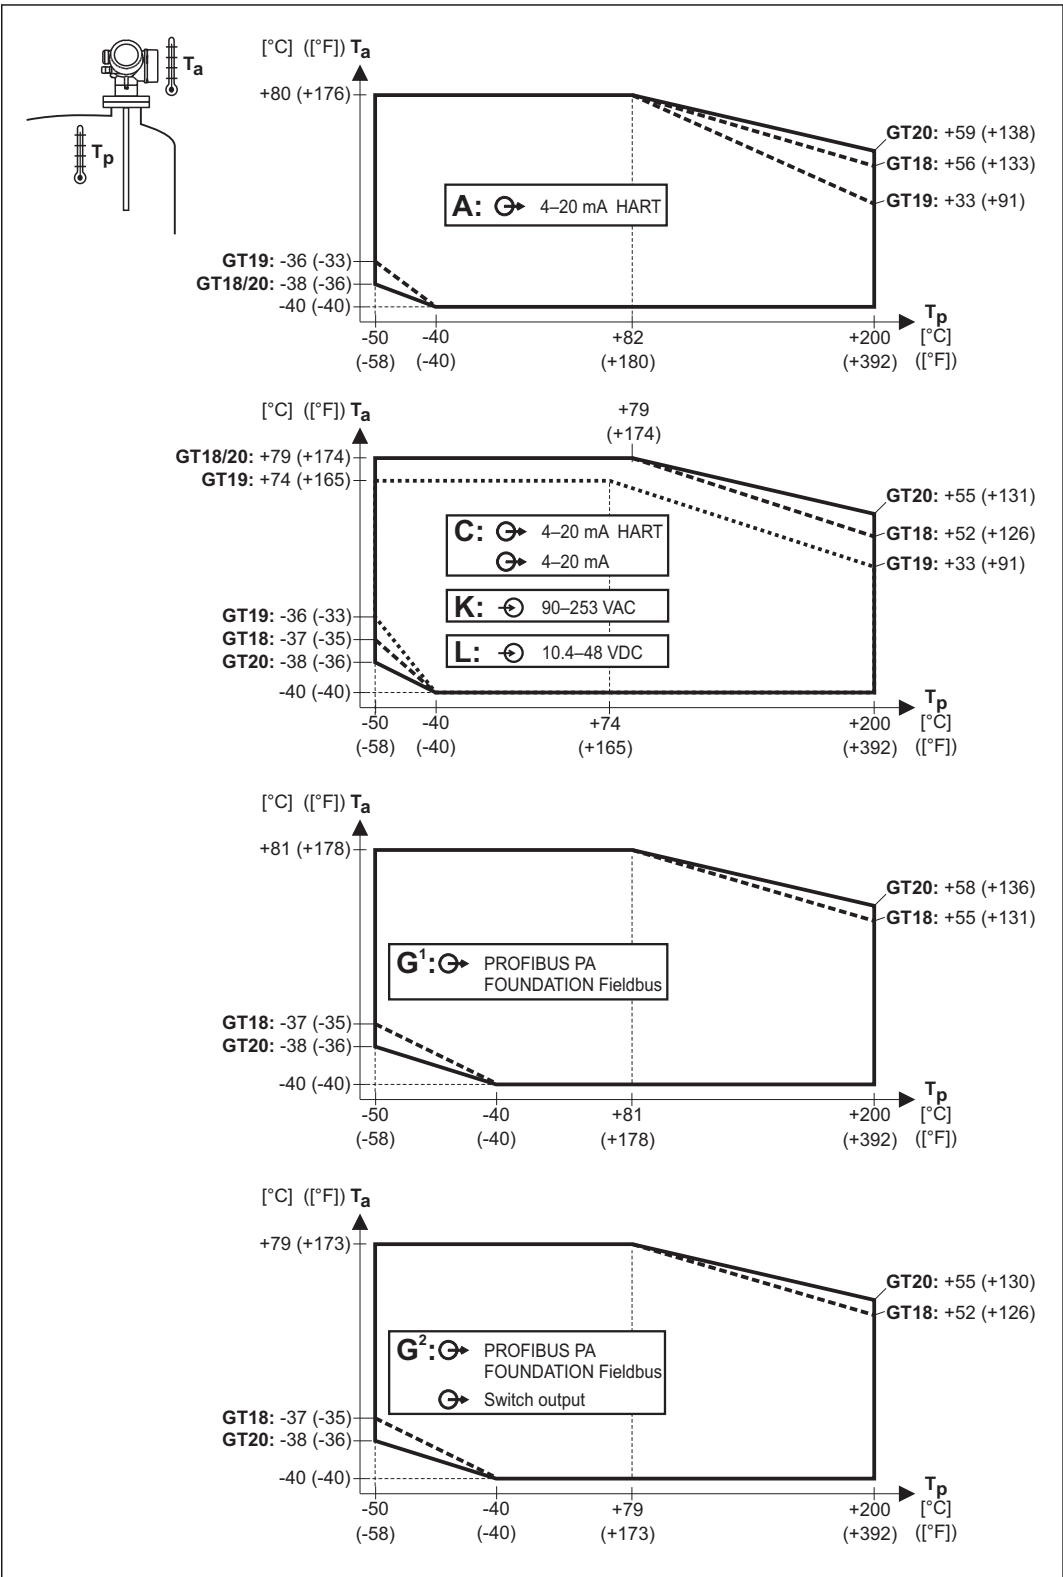

GT18 = stainless steel housing

GT19 = plastic housing

GT20 = aluminum housing

A = 1 current output

C = 2 current outputs


G¹, G² = PROFIBUS PA ¹⁾

K, L = 4-wire

T_a = ambient temperature

T_p = temperature at the process connection

- 1) For PROFIBUS PA and FOUNDATION Fieldbus the temperature derating depends on the usage of the switch output. (G¹: switch output not connected; G²: switch output connected).

| | |
|--|--|
| Storage temperature | -40 to +80 °C (-40 to +176 °F) |
| Climate class | DIN EN 60068-2-38 (test Z/AD) |
| Altitude according to IEC61010-1 Ed.3 | Up to 2 000 m (6 600 ft) above MSL. |
| Degree of protection | <ul style="list-style-type: none"> ■ With closed housing tested according to: <ul style="list-style-type: none"> – IP68, NEMA6P (24 h at 1.83 m under water surface) ⁷⁾ – For plastic housing with transparent cover (display module): IP68 (24 h at 1.00 m under water surface) ⁸⁾ – IP66, NEMA4X ■ With open housing: IP20, NEMA1 ■ Display module: IP22, NEMA2 <p> Degree of protection IP68 NEMA6P applies for M12 PROFIBUS PA plugs only when the PROFIBUS cable is plugged in and is also rated IP68 NEMA6P.</p> |
| Vibration resistance | DIN EN 60068-2-64 / IEC 60068-2-64: 20 to 2 000 Hz, 1 (m/s ²) ² /Hz |
| Cleaning the probe | Depending on the application, contamination or buildup can accumulate on the probe. A thin, even layer only influences measurement slightly. Thick layers can dampen the signal and then reduce the measuring range. Severe, uneven buildup, adhesion e.g. through crystallization, can lead to incorrect measurement. In this case, we recommend that you use a non-contact measuring principle, or check the probe regularly for soiling. |
| Electromagnetic compatibility (EMC) | <p>Electromagnetic compatibility to all relevant requirements of the EN 61326- series and NAMUR recommendation EMC (NE21). For details see declaration of conformity. ⁹⁾ If only the analogue signal is used, unshielded interconnection lines are sufficient for the installation. In case of using the digital signal (HART/ PA/ FF) use shielded interconnection lines.</p> <p>Use a shielded cable when working with a digital communications signal.</p> <p>Max. fluctuations during EMC- tests: < 0.5 % of the span.</p> <p>When installing the probes in metal and concrete tanks and when using a coax probe:</p> <ul style="list-style-type: none"> ■ Interference emission to EN 61326 - x series, electrical equipment Class B. ■ Interference immunity to EN 61326 - x series, requirements for industrial areas and NAMUR Recommendation NE 21 (EMC) <p>The measured value can be affected by strong electromagnetic fields when installing rod and rope probes without a shielding/metallic wall, e.g. in plastic and wooden silos.</p> <ul style="list-style-type: none"> ■ Interference emission to EN 61326 - x series, electrical equipment Class A. ■ Interference immunity: the measured value can be affected by strong electromagnetic fields. |

7) also valid for the "Sensor remote" version

8) This restriction is valid if the following options of the product structure have been selected at the same time: 030("Display, Operation") = C("SD02") or E("SD03"); 040("Housing") = A("GT19").

9) Can be downloaded from www.endress.com.

Process

Process temperature range The maximum permitted temperature at the process connection is determined by the O-ring version ordered:

| Device | O-ring material | Process temperature |
|--------|-----------------|--|
| FMP55 | — | –50 to +200 °C (–58 to +392 °F); completely coated |

| Device | Process pressure |
|--------|---------------------------------|
| FMP55 | –1 to 40 bar (–14.5 to 580 psi) |

i This range may be reduced by the selected process connection. The pressure rating (PN) specified on the flanges refers to a reference temperature of 20 °C, for ASME flanges 100 °F. Pay attention to pressure-temperature dependencies.

Please refer to the following standards for the pressure values permitted for higher temperatures:

- EN 1092-1: 2001 Tab. 18
With regard to their temperature stability properties, the materials 1.4435 and 1.4404 are grouped under 13E0 in EN 1092-1 Tab. 18. The chemical composition of the two materials can be identical.
- ASME B 16.5a - 1998 Tab. 2-2.2 F316
- ASME B 16.5a - 1998 Tab. 2.3.8 N10276
- JIS B 2220

Dielectric constant (DC) and conductivity


- DC (upper medium) ≤ 10
- DC (lower medium) - DK (upper medium) ≥ 10
- Interface thickness ≥ 60 mm (2.4 in)
- Conductivity (upper medium): ≤ 1 $\mu\text{S}/\text{cm}$
- Conductivity (lower medium): ≥ 100 $\mu\text{S}/\text{cm}$

Expansion of the rope probes through temperature Elongation through temperature increase from 30 °C (86 °F) to 150 °C (302 °F): 2 mm / m rope length

Mechanical construction


Dimensions

Dimensions of the electronics housing

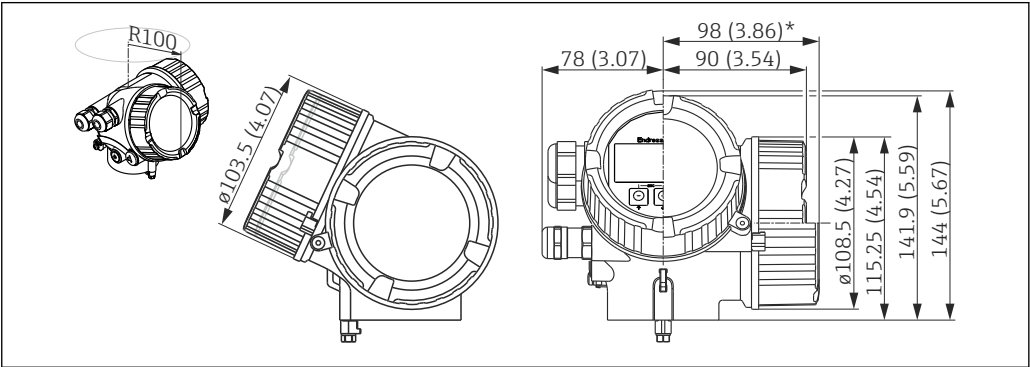


A0011666

18 Housing GT18 (316L); Dimensions in mm (in)
*for devices with integrated overvoltage protection.

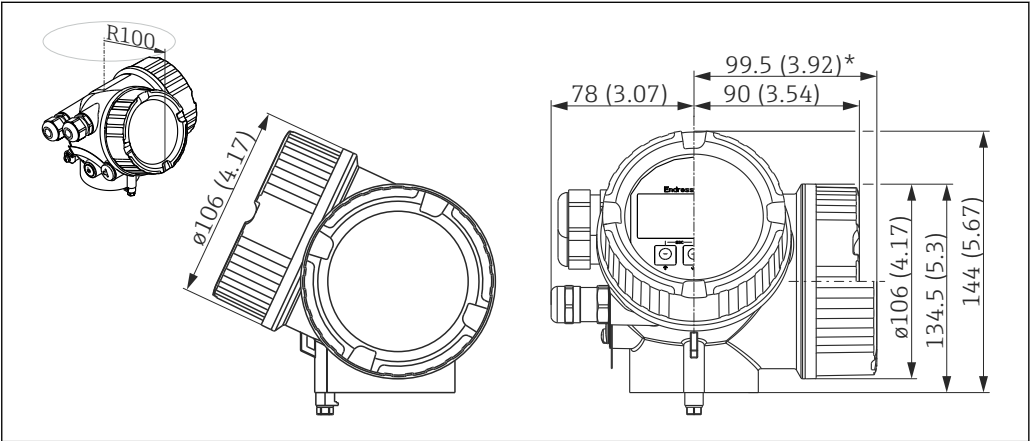

A0011346


19 Housing GT19 (Plastics PBT); Dimensions in mm (in)
*for devices with integrated overvoltage protection.

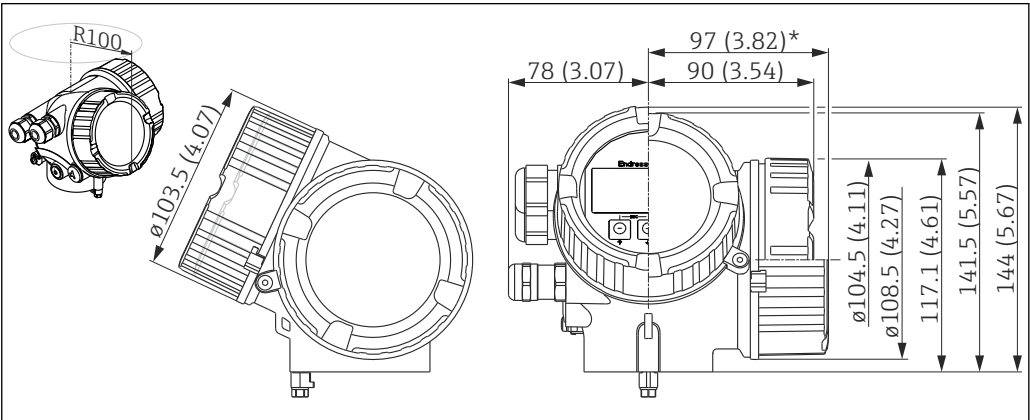

A0020751

20 Housing GT20 (Alu coated); Dimensions in mm (in)
*for devices with integrated overvoltage protection.

Dimensions of the mounting bracket

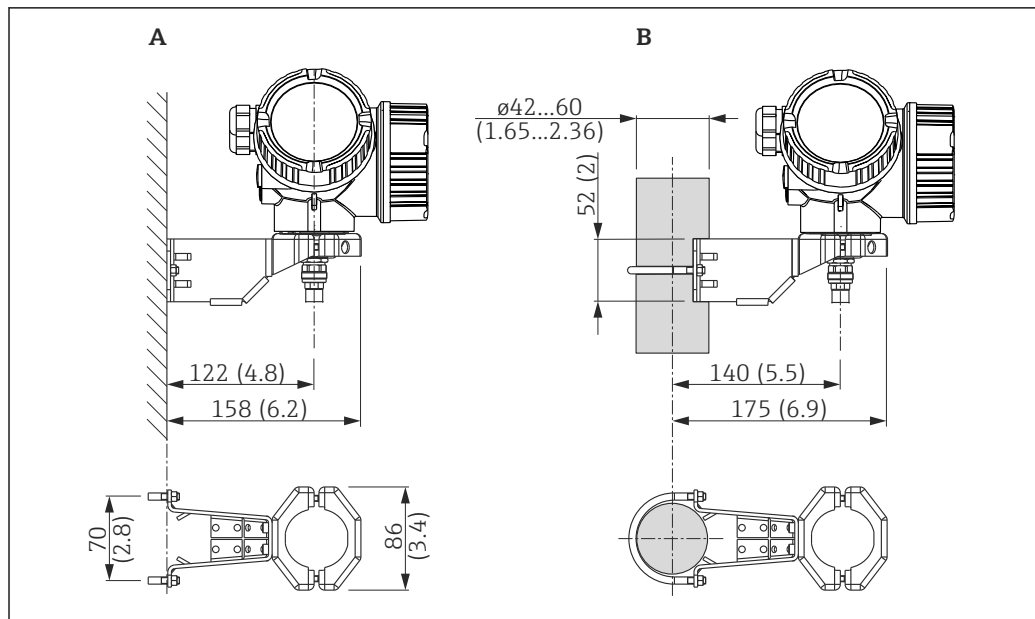

A0014793


21 Mounting bracket for the electronics housing: dimensions: mm (in)

A Wall mounting

B Pipe mounting

i For the "Sensor remote" device version (see feature 060 of the product structure), the mounting bracket is part of the delivery. If required, it can also be ordered as an accessory (order code 71102216).


Dimensions of the connection piece for the remote probe

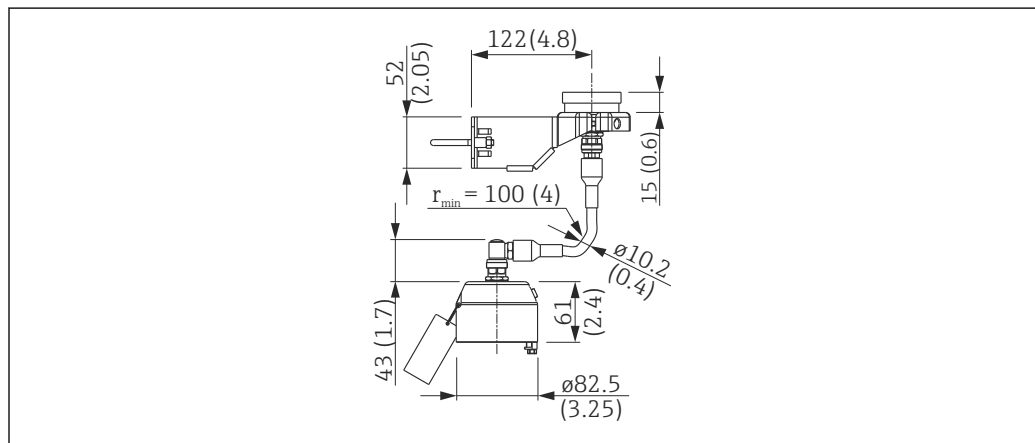

A0023856

22 Connection piece for the remote probe; dimensions: mm (in); Length of the connecting cable: as ordered

FMP55: Dimensions of process connection and probe

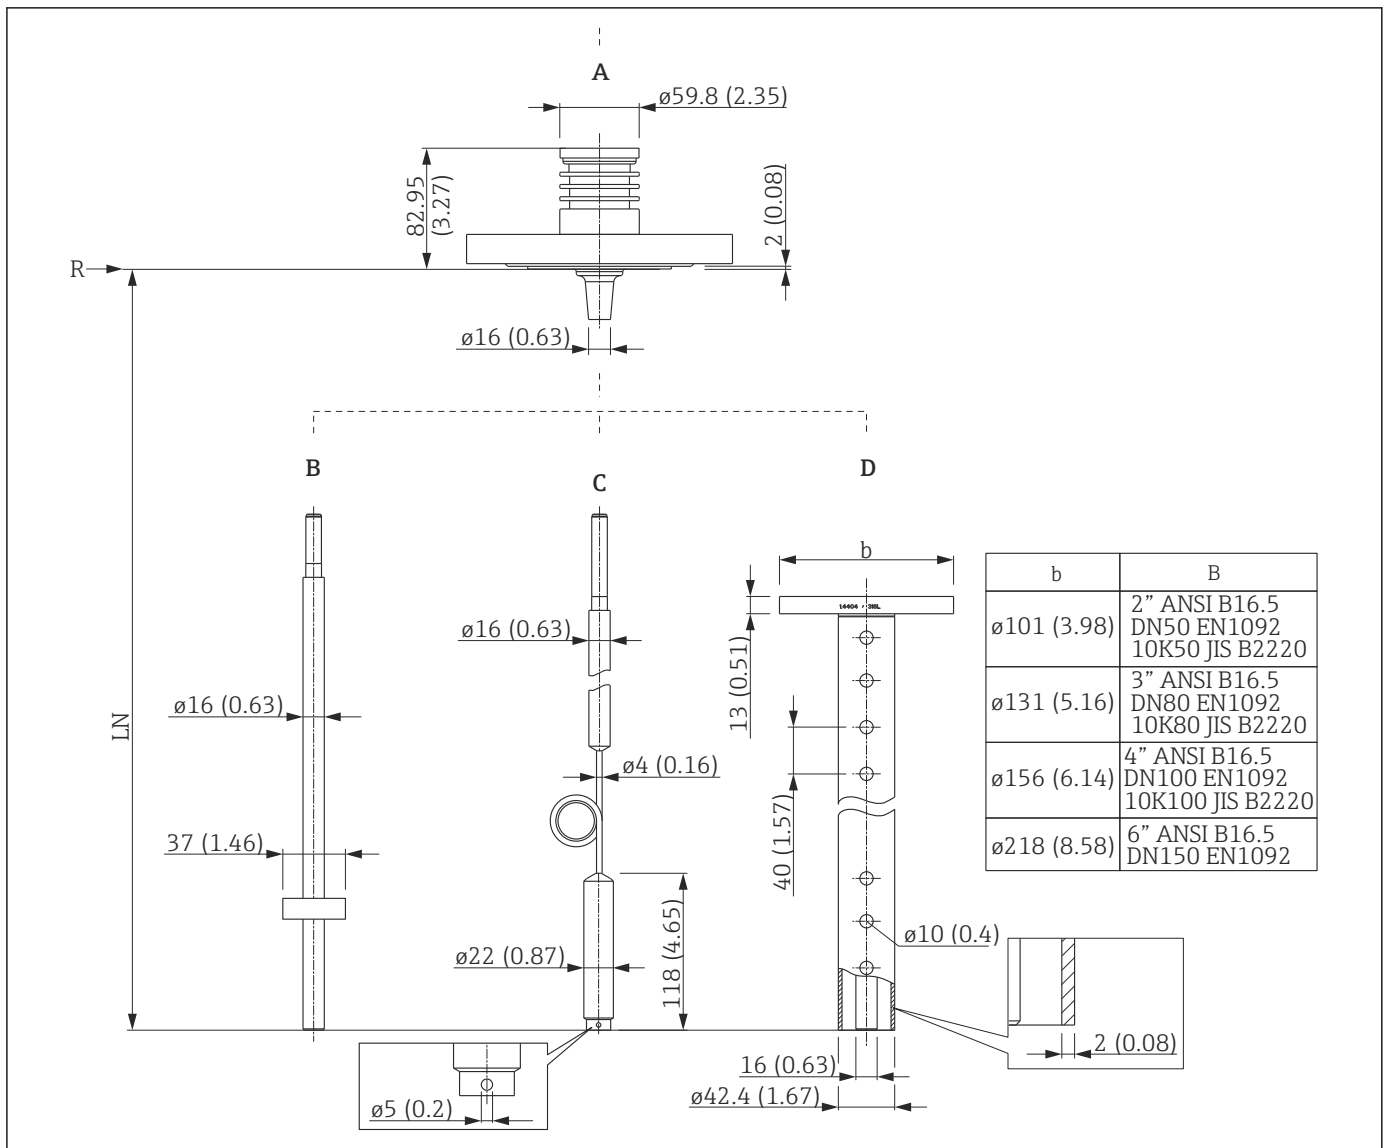

23 FMP55: Process connection / probe; dimensions: mm (in). Unit of measurement mm (in)

A Flange ANSI B16.5, EN1092-1, JIS B2220 (Feature 100)

B Rod probe 16mm or 0.63in, PFA>316L (Feature 060)

C Rope probe 4mm or 1/6", PFA>316 (Feature 060)

D Coax probe (Feature 060)

LN Length of probe

R Reference point of the measurement

Tolerance of probe length

| Rod and coax probes | | | | |
|--------------------------------|-----------|-------------|-------------|-------------|
| Over [m (ft)] | — | 1 (3,3) | 3 (9,8) | 6 (20) |
| Up to [m (ft)] | 1 (3,3) | 3 (9,8) | 6 (20) | — |
| Admissible tolerance [mm (in)] | -5 (-0,2) | -10 (-0,39) | -20 (-0,79) | -30 (-1,18) |

| Rope probes | | | | |
|--------------------------------|-------------|-------------|-------------|-------------|
| Over [m (ft)] | — | 1 (3,3) | 3 (9,8) | 6 (20) |
| Up to [m (ft)] | 1 (3,3) | 3 (9,8) | 6 (20) | — |
| Admissible tolerance [mm (in)] | -10 (-0,39) | -20 (-0,79) | -30 (-1,18) | -40 (-1,57) |

Weight


Housing

| Part | Weight |
|--------------------------------|----------------|
| Housing GT18 - stainless steel | approx. 4.5 kg |
| Housing GT19 - plastic | approx. 1.2 kg |
| Housing GT20 - aluminium | approx. 1.9 kg |

FMP55

| Part | Weight | Part | Weight |
|-----------------|-----------------------------------|-----------------|-------------------------------|
| Sensor | approx. 1.2 kg + weight of flange | Rod probe 16 mm | approx. 1.1 kg/m probe length |
| Rope probe 4 mm | approx. 0.5 kg/m probe length | Coax probe | approx. 3.5 kg/m probe length |

Materials: GT18 housing

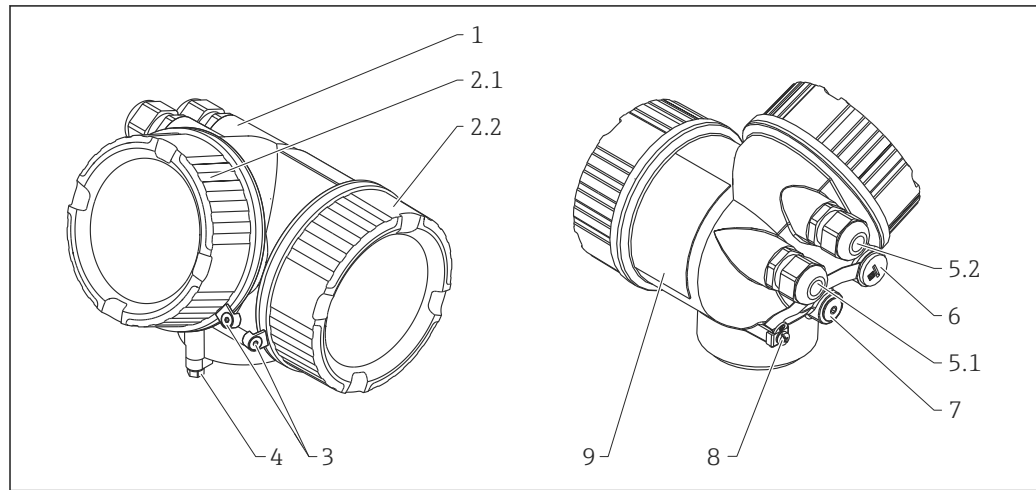


A0013788

| No. | Part | Material |
|-----|--|--|
| 1 | Housing | CF-3M (316L, 1.4404) |
| 2.1 | Cover of the electronics compartment | <ul style="list-style-type: none"> Cover: CF-3M (316L, 1.4404) Window: glass Cover seal: EPDM Seal of the window: NBR Thread-coating: Graphite-based lubricant varnish |
| 2.2 | Cover of the terminal compartment | <ul style="list-style-type: none"> Cover: CF-3M (316L, 1.4404) Cover seal: EPDM Thread-coating: Graphite-based lubricant varnish |
| 3 | Cover lock | <ul style="list-style-type: none"> Screw: A4 Clamp: 316L (1.4404) |
| 4 | Lock at the housing neck | <ul style="list-style-type: none"> Screw: A4-70 Clamp: 316L (1.4404) |
| 5.1 | Dummy plug, cable gland, adapter or plug (depending on the device version) | <ul style="list-style-type: none"> Dummy plug, depending on the device version: <ul style="list-style-type: none"> PE PBT-GF Cable gland: 316L (1.4404) or nickel-plated brass Adapter: 316L (1.4404/1.4435) Seal: EPDM M12 plug: Nickel-plated brass ¹⁾ 7/8" plug: 316 (1.4401) ²⁾ |
| 5.2 | Dummy plug, cable gland or adapter (depending on the device version) | <ul style="list-style-type: none"> Dummy plug: 316L (1.4404) Cable gland: 316L (1.4404) or nickel-plated brass Adapter: 316L (1.4404/1.4435) Seal: EPDM |
| 6 | Dummy plug or M12 socket (depending on the device version) | <ul style="list-style-type: none"> Dummy plug: 316L (1.4404) M12 socket: 316L (1.4404) |
| 7 | Pressure relief stopper | 316L (1.4404) |
| 8 | Ground terminal | <ul style="list-style-type: none"> Screw: A4 Spring washer: A4 Clamp: 316L (1.4404) Holder: 316L (1.4404) |
| 9 | Nameplate | <ul style="list-style-type: none"> Plate: 316L (1.4404) Groove pin: A4 (1.4571) |

1) For the version with M12 plug the sealing material is Viton.

2) For the version with 7/8" plug, the sealing material is NBR.

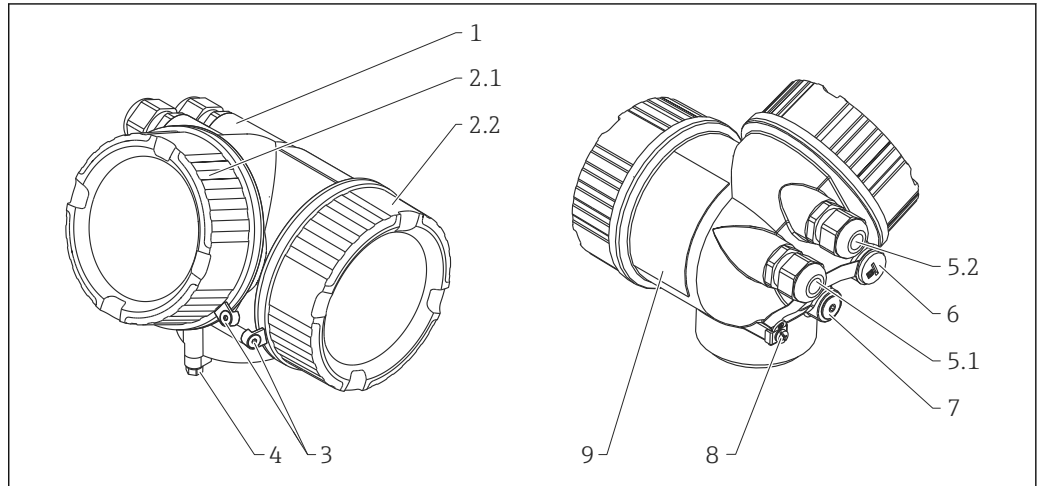Materials: GT19 housing


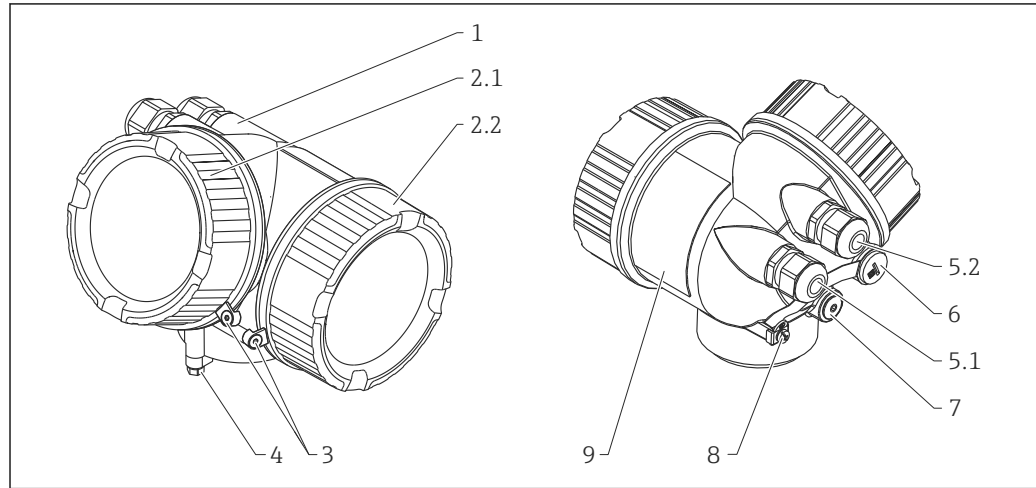
A0013788

| No. | Part | Material |
|-----|--|--|
| 1 | Housing | PBT |
| 2.1 | Cover of the electronics compartment | <ul style="list-style-type: none"> Cover, depending on the device version: <ul style="list-style-type: none"> PA (see-through cover) PBT (non-transparent cover) Cover seal: EPDM Thread-coating: Graphite-based lubricant varnish |
| 2.2 | Cover of the terminal compartment | <ul style="list-style-type: none"> Cover: PBT Cover seal: EPDM Thread-coating: Graphite-based lubricant varnish |
| 4 | Lock at the housing neck | <ul style="list-style-type: none"> Screw: A4-70 Clamp: 316L (1.4404) |
| 5.1 | Dummy plug, cable gland, adapter or plug (depending on the device version) | <ul style="list-style-type: none"> Dummy plug, depending on the device version: <ul style="list-style-type: none"> PE PBT-GF Cable gland, depending on the device version: <ul style="list-style-type: none"> Nickel-plated brass (CuZn) PA Adapter: 316L (1.4404/1.4435) Seal: EPDM M12 plug: Nickel-plated brass ¹⁾ 7/8" plug: 316 (1.4401) ²⁾ |
| 5.2 | Dummy plug, cable gland or adapter (depending on the device version) | <ul style="list-style-type: none"> Dummy plug, depending on the device version: <ul style="list-style-type: none"> PE PBT-GF Nickel-plated steel Cable gland, depending on the device version: <ul style="list-style-type: none"> Nickel-plated brass (CuZn) PA Adapter: 316L (1.4404/1.4435) Seal: EPDM |
| 6 | Dummy plug or M12 socket (depending on the device version) | <ul style="list-style-type: none"> Dummy plug: Nickel-plated brass (CuZn) M12 socket: Nickel-plated GD-Zn |
| 7 | Pressure relief stopper | Nickel-plated brass (CuZn) |
| 8 | Ground terminal | <ul style="list-style-type: none"> Screw: A2 Spring washer: A4 Clamp: 304 (1.4301) Holder: 304 (1.4301) |
| 9 | Nameplate | Sticker |

1) For the version with M12 plug the sealing material is Viton.

2) For the version with 7/8" plug, the sealing material is NBR.

Materials: GT20 housing



A0013788

| Nr. | Part | Material |
|-----|--|--|
| 1 | Housing, RAL 5012 (blue) | <ul style="list-style-type: none"> Housing: AlSi10Mg(<0,1% Cu) Coating: Polyester |
| 2.1 | Cover of the electronics compartment; RAL 7035 (gray) | <ul style="list-style-type: none"> Cover: AlSi10Mg(<0,1% Cu) Window: Glass Cover seal: EPDM Seal of the window: NBR Thread-coating: Graphite-based lubricant varnish |
| 2.2 | Cover of the terminal compartment; RAL 7035 (gray) | <ul style="list-style-type: none"> Cover: AlSi10Mg(<0,1% Cu) Cover seal: EPDM Thread-coating: Graphite-based lubricant varnish |
| 3 | Cover lock | <ul style="list-style-type: none"> Screw: A4 Clamp: 316L (1.4404) |
| 4 | Lock at the housing neck | <ul style="list-style-type: none"> Screw: A4-70 Clamp: 316L (1.4404) |
| 5.1 | Dummy plug, cable gland, adapter or plug (depending on the device version) | <ul style="list-style-type: none"> Dummy plug, depending on the device version: <ul style="list-style-type: none"> PE PBT-GF Cable gland, depending on the device version: <ul style="list-style-type: none"> Nickel-plated brass (CuZn) PA Adapter: 316L (1.4404/1.4435) Seal: EPDM M12 plug: Nickel-plated brass ¹⁾ 7/8" plug: 316 (1.4401) ²⁾ |
| 5.2 | Dummy plug, cable gland or adapter (depending on the device version) | <ul style="list-style-type: none"> Dummy plug, depending on the device version: <ul style="list-style-type: none"> PE PBT-GF Nickel-plated steel Cable gland, depending on the device version: <ul style="list-style-type: none"> Nickel-plated brass (CuZn) PA Adapter: 316L (1.4404/1.4435) Seal: EPDM |
| 6 | Dummy plug or M12 socket (depending on the device version) | <ul style="list-style-type: none"> Dummy plug : Nickel-plated brass (CuZn) M12 socket: Nickel-plated GD-Zn |
| 7 | Pressure relief stopper | Nickel-plated brass (CuZn) |


| Nr. | Part | Material |
|-----|-----------------|---|
| 8 | Ground terminal | <ul style="list-style-type: none"> ■ Screw: A2 ■ Spring washer: A2 ■ Clamp: 304 (1.4301) ■ Holder: 304 (1.4301) |
| 9 | Nameplate | Sticker |

- 1) For the version with M12 plug the sealing material is Viton.
- 2) For the version with 7/8" plug, the sealing material is NBR.




Materials: Process connection




Endress+Hauser supplies DIN/EN flanges made of stainless steel according to AISI 316L (DIN/EN material number 1.4404 or 1.4435). With regard to their temperature stability properties, the materials 1.4404 and 1.4435 are grouped under 13E0 in EN 1092-1 Tab. 18. The chemical composition of the two materials can be identical.

| Levelflex FMP55 | | |
|---|-----|---|
| Flange <i>EN/ASME/JIS</i> | No. | Material |
|  A0014650 | 1 | 304 (1.4301) |
| | 2 | ASME: 316/316L EN: 316L (1.4404) JIS: 316L (1.4435) |
| | 4 | Coating 2 mm (0.08 in): PTFE (Dyneon TFM1600) |
| | | |

Materials: Probe
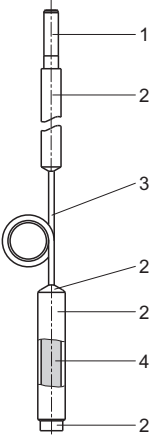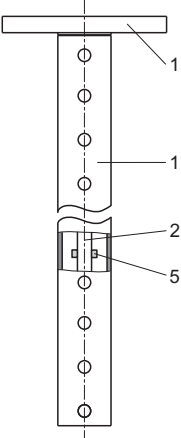
| Levelflex FMP55 | | | | |
|---|---|--|-----|--|
| Rod probe Φ 16 mm (2/3") coated | Rope probe Φ 4 mm (1/6") coated | Coax probe | No. | Material |
|  A0013870 |  A0013871 |  A0013887 | 1 | 316L (1.4404) |
| | | | 2 | Coating 2 mm (0.08 in): PFA (Daikin PFA AP230) |
| | | | 3 | Rope: 316L (1.4404) |
| | | | | Coating 0.75mm (0.03 in): PFA (Daikin PFA AP230) |
| | | | 4 | Core: 316L (1.4435) |
| | | | 5 | PFA (Daikin PFA AP230), centering star |


Materials: Mounting bracket

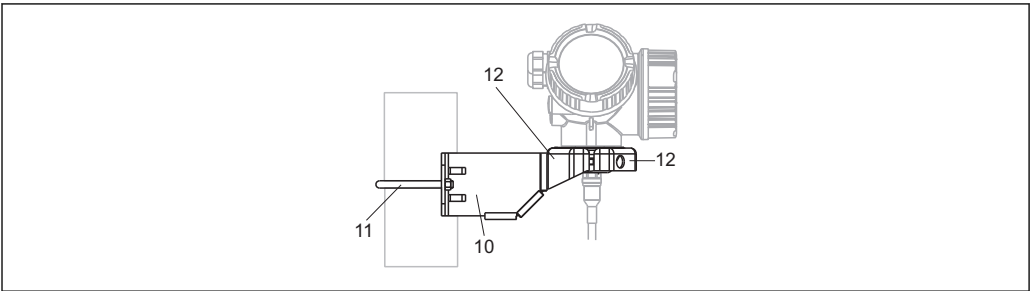

A0015143

| Mounting bracket for version "Sensor remote" | | |
|--|------------------|---------------------------------|
| Position | Part | Material |
| 10 | Bracket | 316L (1.4404) |
| 11 | Bracket | 316Ti (1.4571) |
| | Screw/nuts | A4-70 |
| | Distance sleeves | 316Ti (1.4571) or 316L (1.4404) |
| 12 | Half-shells | 316L (1.4404) |


Materials: Adapter and cable
for remote display

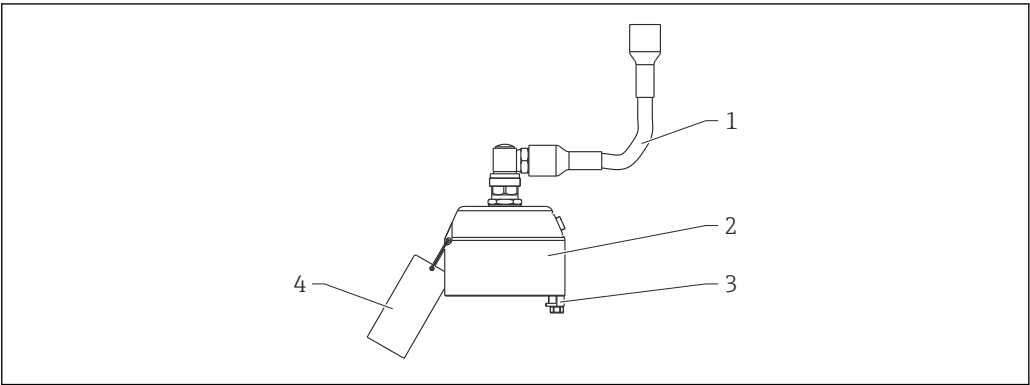

A0021722

| Adapter and cable for version "Sensor remote" | | |
|---|----------------|---------------|
| Position | Part | Material |
| 1 | Cable | FRNC |
| 2 | Sensor adapter | 304 (1.4301) |
| 3 | Clamp | 316L (1.4404) |
| | Screw | A4-70 |
| 4 | Loop | 316 (1.4401) |
| | Crimp sleeve | Aluminum |
| | Nameplate | 304 (1.4301) |

Materials: Weather protection cover


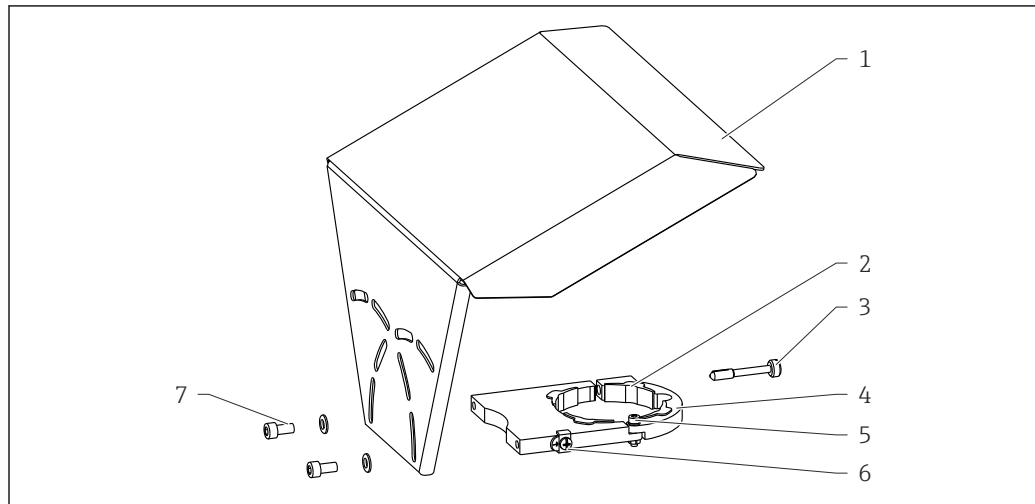


A0015473

| No | Part: Material |
|----|---|
| 1 | Protection cover: 316L (1.4404) |
| 2 | Molded rubber part (4x): EPDM |
| 3 | Clamping screw: 316L (1.4404) + carbon fibre |
| 4 | Bracket: 316L (1.4404) |
| 5 | <ul style="list-style-type: none"> ▪ Cheese head screw: A4-70 ▪ Nut: A4 ▪ Spring washer: A4 |
| 6 | Ground terminal <ul style="list-style-type: none"> ▪ Screw: A4 ▪ Spring washer: A4 ▪ Clamp: 316L (1.4404) ▪ Holder: 316L (1.4404) |
| 7 | <ul style="list-style-type: none"> ▪ Washer: A4 ▪ Cheese head screw: A4-70 |


Operability

| | |
|-------------------|--|
| Operating concept | <p>Operator-oriented menu structure for user-specific tasks</p> <ul style="list-style-type: none">■ Commissioning■ Operation■ Diagnostics■ Expert level <p>Operatring languages</p> <ul style="list-style-type: none">■ English (contained in every device)■ One additional language as ordered (feature 500 of the product structure) <p>Quick and safe commisioning</p> <ul style="list-style-type: none">■ Interactive wizard with graphical interface for easy commissioning via FieldCare/DeviceCare■ Menu guidance with brief explanations of the individual parameter functions <p>Reliable operation</p> <ul style="list-style-type: none">■ Standardized operation at the device and in the operating tools■ Data storage device (HistoROM) for process and measuring device data with event logbook available at all times - even if electronics modules are replaced <p>Efficient diagnostics increase measurement reliability</p> <ul style="list-style-type: none">■ Remedy information is integrated in plain text■ Diverse simulation options and line recorder functions |
|-------------------|--|
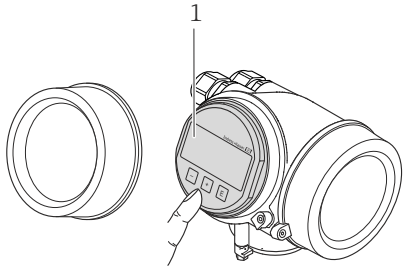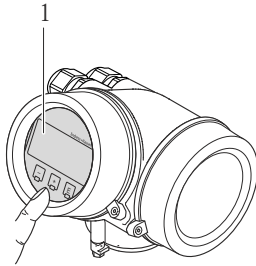
| | | |
|-----------------|--|--|
| Local operation | <p>Order code for "Display; Operation", option C "SD02"</p>  <p>A0015544</p> <p>1 Operation with pushbuttons</p> | <p>Order code for "Display; Operation", option E "SD03"</p>  <p>A0015546</p> <p>1 Operation with touch control</p> |
|-----------------|--|--|

- Display elements**
- 4-line display
 - In the case of order code for "Display; Operation", option **E**: white background lighting; switches to red in event of device errors
 - Format for displaying measured variables and status variables can be individually configured
 - Permitted ambient temperature for the display: -20 to +70 °C (-4 to +158 °F)
The readability of the display may be impaired at temperatures outside the temperature range.
- Operating elements**
- In the case of order code "Display; Operation", Option **C**: local operation with 3 push buttons (⊖, ⊕, ⊞)
 - In the case of order code for "Display; Operation", option **E**: external operation via touch control; 3 optical keys: ⊖, ⊕, ⊞
 - Operating elements also accessible in various hazardous areas
- Additional functionality**
- Data backup function
The device configuration can be saved in the display module.
 - Data comparison function
The device configuration saved in the display module can be compared to the current device configuration.
 - Data transfer function
The transmitter configuration can be transmitted to another device using the display module.

Operation with remote display and operating module FHX50

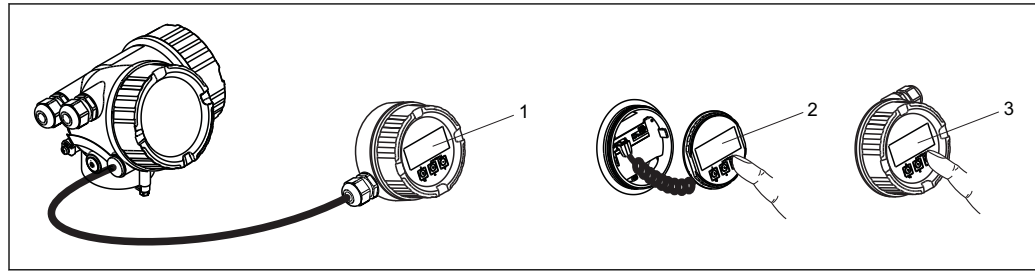


A0013137

24 FHX50 operating options

- 1 Housing of the remote display and operating module FHX50
- 2 Display and operating module SD02, push buttons; cover must be removed
- 3 Display and operating module SD03, optical keys; can be operated through the glass of the cover

Remote operation

Via HART protocol

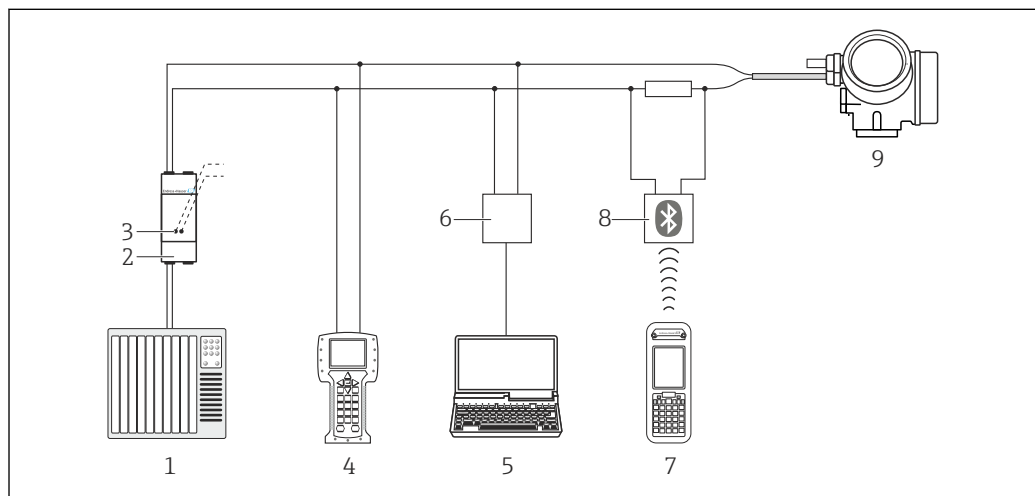


A0013764

25 Options for remote operation via HART protocol

- 1 PLC (programmable logic controller)
- 2 Transmitter power supply unit, e.g. RN221N (with communication resistor)
- 3 Connection for Commubox FXA191, FXA195 and Field Communicator 375, 475
- 4 Field Communicator 475
- 5 Computer with operating tool (e.g. FieldCare, AMS Device Manager, SIMATIC PDM)
- 6 Commubox FXA191 (RS232) or FXA195 (USB)
- 7 Field Xpert SFX350/SFX370
- 8 VIATOR Bluetooth modem with connecting cable
- 9 Transmitter

Via PROFIBUS PA protocol

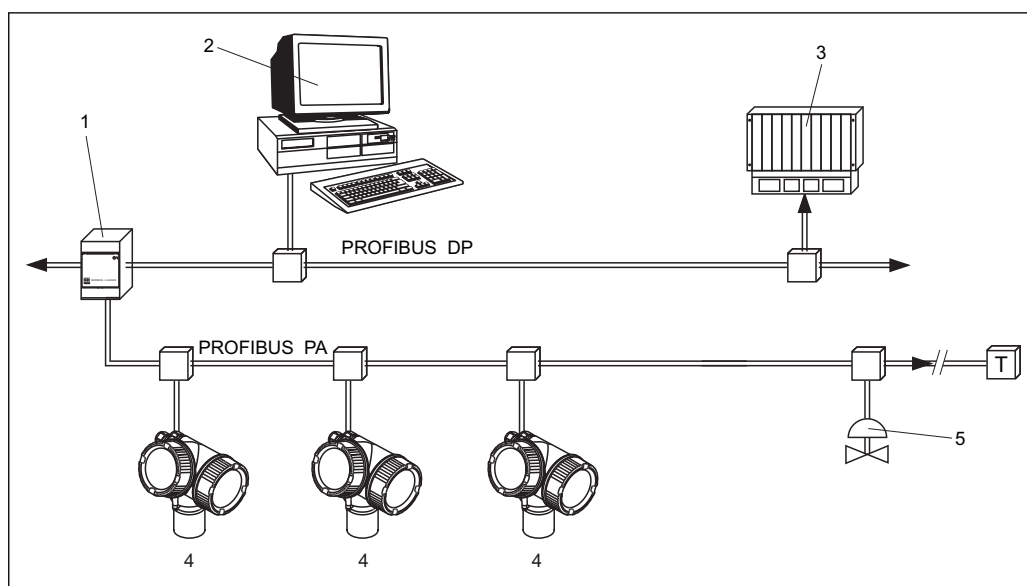


- 1 Segment coupler
- 2 Computer with Profiboard/Proficard and operating tool (e.g. FieldCare)
- 3 PLC (Programmable Logic Controller)
- 4 Transmitter
- 5 Additional functions (valves etc.)

- 1 FFblue Bluetooth modem
- 2 Field Xpert SFX350/SFX370
- 3 FieldCare
- 4 NI-FF interface card

| | |
|--------|-----------------------------|
| IN | Industrial network |
| FF-HSE | High Speed Ethernet |
| FF-H1 | FOUNDATION Fieldbus-H1 |
| LD | Linking Device FF-HSE/FF-H1 |
| PS | Bus Power Supply |
| SB | Safety Barrier |
| BT | Bus Terminator |


Via service interface (CDI)

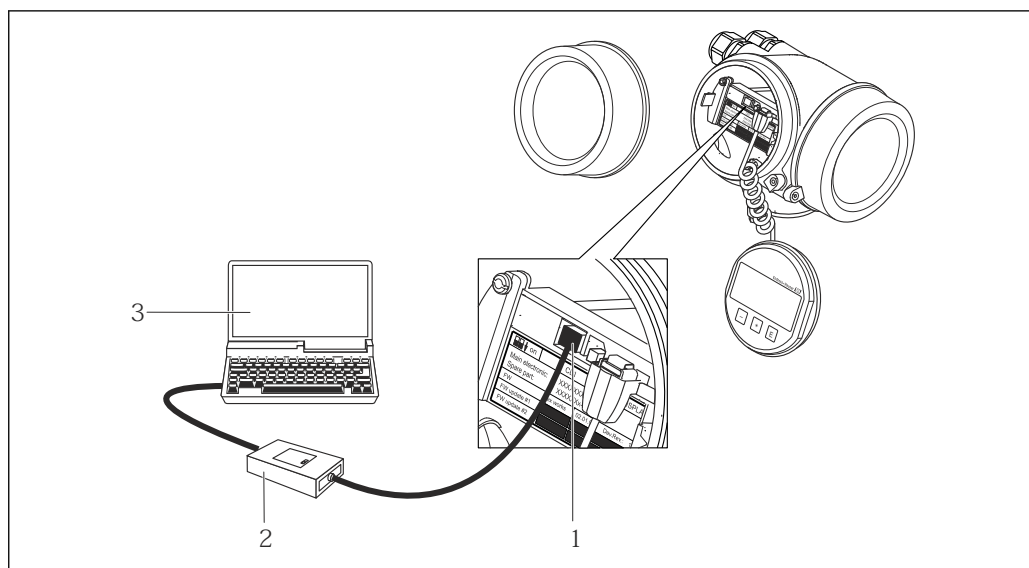

- 1 Service interface (CDI) of the measuring device (= Endress+Hauser Common Data Interface)
- 2 Commubox FXA291
- 3 Computer with "FieldCare" operating tool

Integration in tank gauging system

The Endress+Hauser Tank Side Monitor NRF590 provides integrated communications for sites with multiple tanks, each with one or more sensors on the tank, such as radar, spot or average temperature, capacitive probe for water detection and/or pressure sensors. Multiple protocols out of the Tank Side Monitor guarantee connectivity to nearly any of the existing industry standard tank gauging protocols. Optional connectivity of analog 4...20 mA sensors, digital I/O and analog output simplify full tank sensor integration. Use of the proven concept of the intrinsically safe HART bus for all on-tank sensors yields extremely low wiring costs, while at the same time providing maximum safety, reliability and data availability.

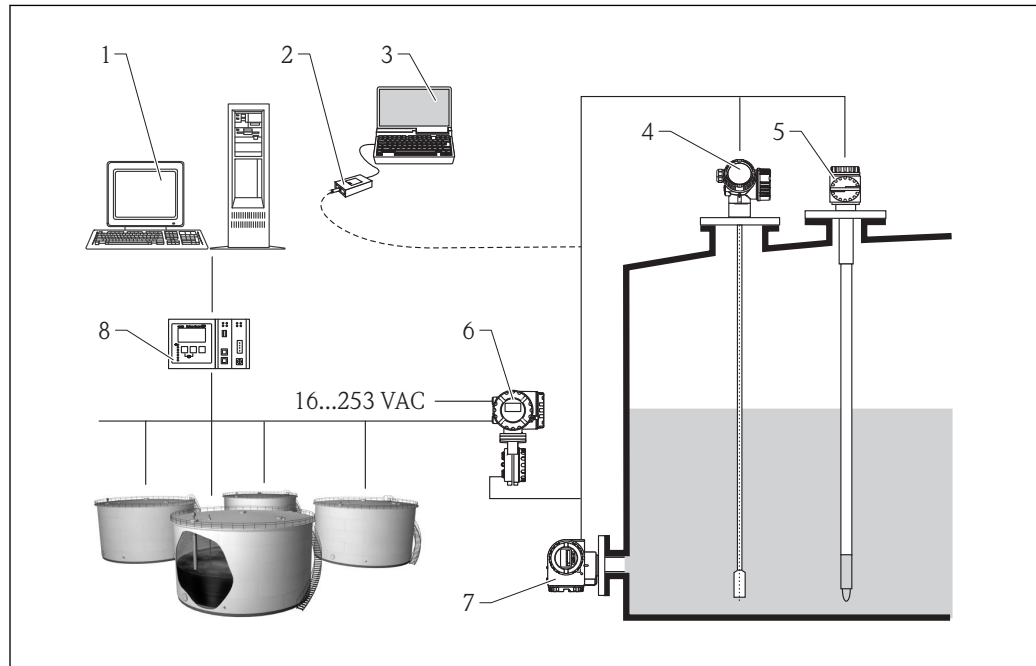

A0016590

27 The complete measuring system consists of:

- 1 Tankvision workstation
- 2 Commubox FXA195 (USB) - optional
- 3 Computer with operating tool (ControlCare) - optional
- 4 Level measuring device
- 5 Temperature measuring device
- 6 Tank Side Monitor NRF590
- 7 Pressure measuring device
- 8 Tankvision Tank Scanner NXA820


System integration via Fieldgate

Vendor Managed Inventory

By using Fieldgates to interrogate tank or silo levels remotely, suppliers of raw materials can provide their regular customers with information about the current supplies at any time and, for example, account for them in their own production planning. For their part, the Fieldgates monitor the configured level limits and, if required, automatically activate the next supply. The spectrum of options here ranges from a simple purchasing requisition via e-mail through to fully automatic order administration by coupling XML data into the planning systems on both sides.

Remote maintenance of measuring equipment

Fieldgates not only transfer the current measured values, they also alert the responsible standby personnel, if required, via e-mail or SMS. In the event of an alarm or also when performing routine checks, service technicians can diagnose and configure connected HART devices remotely. All that is required for this is the corresponding HART operating tool (e.g. FieldCare, ...) for the connected device. Fieldgate passes on the information transparently, so that all options for the respective operating software are available remotely. Some on-site service operations can be avoided by using remote diagnosis and remote configuration and all others can at least be better planned and prepared.

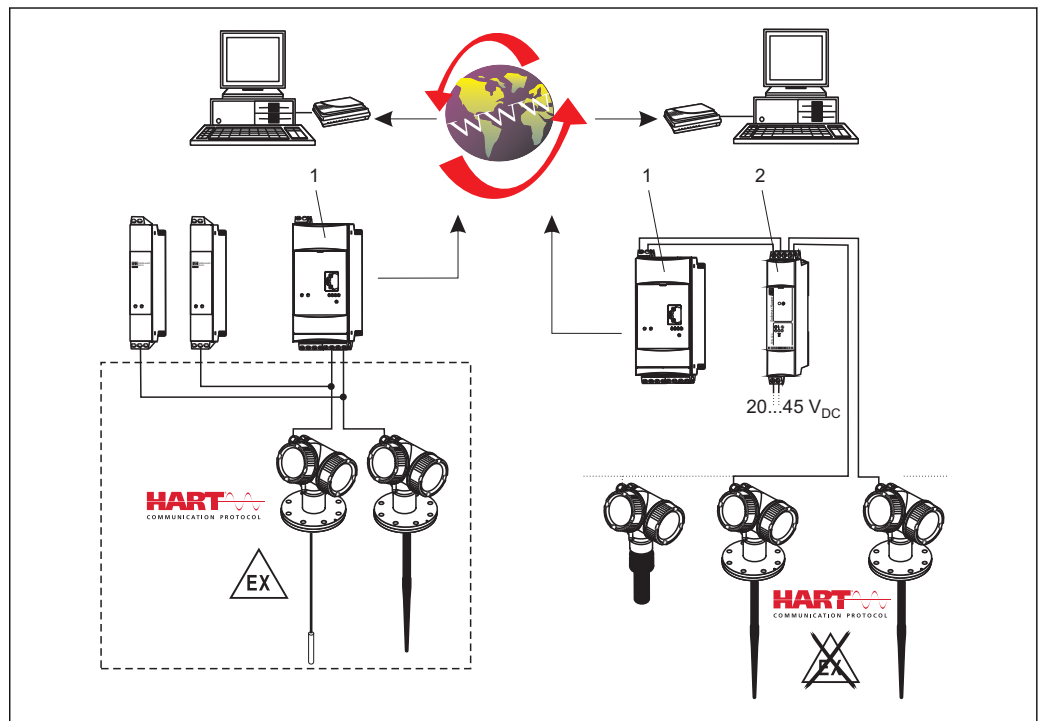




28 The complete measuring system consists of devices and:

- 1 Fieldgate FXA520
- 2 Multidrop Connector FXN520

i The number of instruments which can be connected in multidrop mode can be calculated by the "FieldNetCalc" program. A description of this program can be found in Technical Information TI 400F (Multidrop Connector FXN520). The program is available from your Endress+Hauser sales organisation or in the internet at: www.de.endress.com/Download (text search = "Fieldnetcalc").

Certificates and approvals

| | |
|---|--|
| CE mark | <p>The measuring system meets the legal requirements of the applicable EC guidelines. These are listed in the corresponding EC Declaration of Conformity together with the standards applied.</p> <p>Endress+Hauser confirms successful testing of the device by affixing to it the CE mark.</p> |
| C-Tick symbol | <p>The measuring system meets the EMC requirements of the "Australian Communications and Media Authority (ACMA)".</p> |
| Ex approval | <p>The devices are certified for use in hazardous areas and the relevant safety instructions are provided in the separate "Safety Instructions" (XA) document. Reference is made to this document on the nameplate.</p> <p> The separate documentation "Safety Instructions" (XA) containing all the relevant explosion protection data is available from your Endress+Hauser Sales Center. Correlation of documentations to the device →  87.</p> |
| Dual seal according to ANSI/ISA 12.27.01 | <p>The devices have been designed according to ANSI/ISA 12.27.01 as dual seal devices, allowing the user to waive the use and save the cost of installing external secondary process seals in the conduit as required by the process sealing sections of ANSI/NFPA 70 (NEC) and CSA 22.1 (CEC). These instruments comply with the North-American installation practice and provide a very safe and cost-saving installation for pressurized applications with hazardous fluids.</p> <p>Further information can be found in the Safety Instructions (XA) of the relevant devices.</p> |
| Functional Safety | <p>Used for level monitoring (MIN, MAX, range) up to SIL 3 (homogeneous redundancy), independently assessed by TÜV Rhineland as per IEC 61508. Other information see documentation SD00326F: "Functional Safety Manual".</p> |
| AD2000 | <ul style="list-style-type: none"> For FMP51/FMP54: The wetted material 316L (1.4435/1.4404) corresponds to AD2000 - W2/W10. For FMP52/FMP55: The pressure retaining material 316L (1.4435/1.4404) corresponds to AD2000 - W2/W10. Declaration of conformity: see product structure, feature 580, option JF. |
| NACE MR 0175 / ISO 15156 | <p>For FMP51, FMP54, FMP55:</p> <ul style="list-style-type: none"> The wetted, metallic materials comply with the requirements of NACE MR 0175 / ISO 15156. Declaration of conformity: see product structure, feature 580, option JB. |
| NACE MR 0103 | <p>For FMP51, FMP54, FMP55:</p> <ul style="list-style-type: none"> The wetted, metallic materials comply with the requirements of NACE MR 0103. The certificate of compliance is based on NACE MR 0175. The hardness and the intercrystalline corrosion have been tested, as well as the heat treatment (solution annealed) has been carried out. The used materials comply therefore with the requirements of NACE MR 0103. Declaration of conformity: see product structure, feature 580, option JE. |
| ASME B31.1 and B31.3 | <ul style="list-style-type: none"> The dimensions, materials of construction, pressure / temperature ratings and identification markings of the device comply with the requirements of ASME B31.1 and ASME B31.3 Declaration of conformity: see product structure, feature 580, option KV. |
| Marine certificate | <ul style="list-style-type: none"> GL (Germanischer Lloyd) ABS (American Bureau of Shipping) LR (Lloyd's Register) DNV (Det Norske Veritas) BV (Bureau Veritas) <p> Only in connection with HART or PROFIBUS PA.</p> |
| Telecommunications | <p>Complies with part 15 of the FCC rules for an unintentional radiator. All probes meet the requirements for a Class A digital device.</p> |

In addition, all probes in metallic tanks as well as the coax probe meet the requirements for a Class B digital device.

CRN-Zulassung

Some device versions have a CRN approval. Devices are CRN approved if the following two conditions are met:

- The device has a CSA approval (Product structure: Feature 010 "Approval")
- The device has a CRN approved process connection according to the following table.

| Feature 010 of the product structure | Approval |
|--------------------------------------|--|
| AEK | 1-1/2" 150lbs, PTFE>316/316L flange ANSI B16.5 |
| AFK | 2" 150lbs, PTFE>316/316L flange ANSI B16.5 |
| AGK | 3" 150lbs, PTFE>316/316L flange ANSI B16.5 |
| AHK | 4" 150lbs, PTFE>316/316L flange ANSI B16.5 |
| AJK | 6" 150lbs, PTFE>316/316L flange ANSI B16.5 |
| AQK | 1-1/2" 300lbs, PTFE>316/316L flange ANSI B16.5 |
| ARK | 2" 300lbs, PTFE>316/316L flange ANSI B16.5 |
| ASK | 3" 300lbs, PTFE>316/316L flange ANSI B16.5 |
| ATK | 4" 300lbs, PTFE>316/316L flange ANSI B16.5 |



- Process connections without CRN approval are not included in this table.
- Refer to the product structure to see which process connections are available for a specific device type.
- CRN approved devices are marked with the registration number OF14480.5 on the nameplate.

Test, Certificate

| Feature 580 "Test, Certificate" | Designation | Available for |
|------------------------------------|---|---------------|
| JA | 3.1 Material certificate, wetted metallic parts, EN10204-3.1 inspection certificate | FMP55 |
| JB | Conformity to NACE MR0175, wetted metallic parts | FMP55 |
| JD | 3.1 Material certificate, pressurized parts, EN10204-3.1 inspection certificate | FMP55 |
| JE | Conformity to NACE MR0103, wetted metallic parts | FMP55 |
| JF | Conformity to AD2000, wetted metallic parts: Material of all wetted/pressurized parts conform to AD2000 (Technical rules W2, W9, W10) | FMP55 |
| KE | Pressure test, internal procedure, inspection certificate | FMP55 |
| KG | 3.1 Material certificate+PMI test (XRF), internal procedure, wetted metallic parts, EN10204-3.1 inspection certificate | FMP55 |
| KV | Conformity to ASME B31.3: The dimensions, materials of construction, pressure / temperature ratings and identification markings of the device comply with the requirements of ASME B31.3 | FMP55 |

Other standards and guidelines

- EN 60529
Degrees of protection by housing (IP code)
- EN 61010-1
Protection Measures for Electrical Equipment for Measurement, Control, Regulation and Laboratory Procedures.
- IEC/EN 61326
"Emission in accordance with Class A requirements". Electromagnetic compatibility (EMC requirements)
- NAMUR NE 21
Electromagnetic compatibility (EMC) of industrial process and laboratory control equipment.
- NAMUR NE 43
Standardization of the signal level for the breakdown information of digital transmitters with analog output signal.
- NAMUR NE 53
Software of field devices and signal-processing devices with digital electronics
- NAMUR NE 107
Status classification as per NE107
- NAMUR NE 131
Requirements for field devices for standard applications
- IEC61508
Functional safety of electrical/electronic/programmable electronic safety-related systems

Ordering information

Ordering information

Detailed ordering information is available from the following sources:

- In the Product Configurator on the Endress+Hauser web site: www.endress.com → Choose your country → Products → Select measuring technology, software or components → Select product (picklists: measurement method, product family etc.) → Device support (right-hand column): Configure the selected product → The Product Configurator for the selected product is opened.
- From your Endress+Hauser Sales Center: www.addresses.endress.com



Product Configurator - the tool for individual product configuration


- Up-to-the-minute configuration data
- Depending on the device: Direct input of measuring point-specific information such as measuring range or operating language
- Automatic verification of exclusion criteria
- Automatic creation of the order code and its breakdown in PDF or Excel output format
- Ability to order directly in the Endress+Hauser Online Shop

3-point linearity protocol



The following notes must be taken into account if option F3 ("3 point linearity protocol") has been selected in feature 550 ("Calibration").

Depending on the probe the 3 points of the linearity protocol are defined as follows:

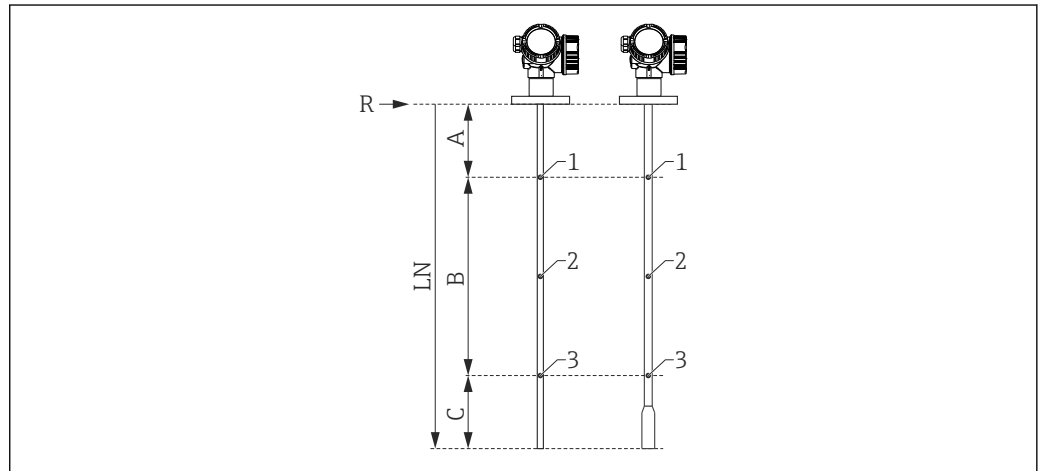

A0021843

- A Distance from reference point R to first measuring point
- B Measuring range
- C Distance from end of probe to third measuring point
- LN Length of probe
- R Reference point of the measurement
- 1 First measuring point
- 2 Second measuring point (centrally between first and third measuring point)
- 3 Third measuring point

| | Rod or coax probe ¹⁾ LN ≤ 6 m (20 ft) | Divisible rod probe LN > 6 m (20 ft) | Rope probe LN ≤ 6 m (20 ft) | Rope probe LN > 6 m (20 ft) |
|---------------------------------|---|--|--|--|
| Position of 1st measuring point | <ul style="list-style-type: none"> FMP51/FMP52/FMP54 without gas phase compensation/ FMP55: A = 350 mm (13.8 in) FMP54 with gas phase compensation, L_{ref} = 300 mm (11 in): A = 600 mm (23.6 in) FMP54 with gas phase compensation, L_{ref} = 550 mm (21 in): A = 850 mm (33.5 in) | | A = 350 mm (13.8 in) | A = 350 mm (13.8 in) |
| Position of 2nd measuring point | centrally between 1st and 3rd measuring point | centrally between 1st and 3rd measuring point | centrally between 1st and 3rd measuring point | centrally between 1st and 3rd measuring point |
| Position of 3rd measuring point | measured from the bottom end of the probe: C = 250 mm (9.84 in) | measured from the top end of the probe: A+B = 5 750 mm (226 in) | measured from the bottom end of the probe: C = 500 mm (19.7 in) | measured from the top end of the probe: A+B = 5 500 mm (217 in) |
| Minimum measuring range | B ≥ 400 mm (15.7 in) | B ≥ 400 mm (15.7 in) | B ≥ 400 mm (15.7 in) | B ≥ 400 mm (15.7 in) |
| Minimum length of probe | LN ≥ 1 000 mm (39.4 in) | LN ≥ 1 000 mm (39.4 in) | LN ≥ 1 250 mm (49.2 in) | LN ≥ 1 250 mm (49.2 in) |

1) also valid for divisible rods



The position of the measuring points may vary by ±1 cm (±0.04 in).




- For rod and rope probes the linearity check is performed with the complete device.
- For coax probes the electronics is mounted to a reference rod probe and the linearity check is performed to this configuration.
- The linearity is checked under reference conditions.

5-point linearity protocol

i The following notes must be taken into account if option F4 ("5 point linearity protocol") has been selected in feature 550 ("Calibration").

The five points of the linearity protocol are evenly distributed across the measuring range (0% to 100%). In order to define the measuring range, **Empty calibration** (E) and **Full calibration** (F) have to be specified¹⁰⁾.

The following restrictions have to be taken into account when defining E and F:

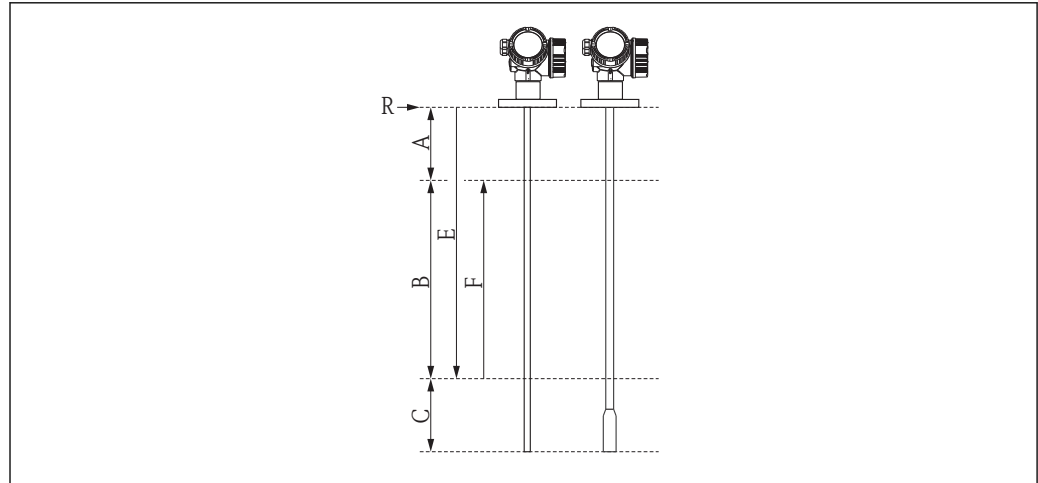

A0014673

| Sensor | Minimum distance between reference point (R) and 100% level | Minimum measuring range |
|--------|---|---------------------------------|
| FMP55 | $A \geq 250 \text{ mm (10 in)}$ | $B \geq 400 \text{ mm (16 in)}$ |

| Type of probe | Minimum distance from end of probe to 0% level | Maximum value for "empty calibration" |
|---------------|--|---------------------------------------|
| Rod | $C \geq 100 \text{ mm (4 in)}$ | $E \leq 3.9 \text{ m (12.8 ft)}$ |
| Coax | $C \geq 100 \text{ mm (4 in)}$ | $E \leq 5.9 \text{ m (19.4 ft)}$ |
| Rope | $C \geq 1000 \text{ mm (40 in)}$ | $E \leq 9 \text{ m (29 ft)}$ |

- i** For rod and rope probes the linearity check is performed with the complete device.
- For coax probes the electronics is mounted to a reference rod probe and the linearity check is performed to this configuration.
- The linearity is checked under reference conditions.

i The selected values of **Empty calibration** and **Full calibration** are only used to record the linearity protocol and are reset to their probe specific default values thereafter. If values different from the default are required, they must be ordered as a customized parametrization → 79.




¹⁰⁾ If E and F are not specified, probe dependent default values will be used instead.

Customized parametrization If the option IJ "Customized parametrization HART", IK "Customized parametrization PA" or IL "Customized parametrization FF" has been selected in feature 570 "Service", customer specific presettings can be selected for the following parameters:

| Parameter | Communication | Selection list / range of values |
|--|--|--|
| Setup → Distance unit | <ul style="list-style-type: none"> ■ HART ■ PA ■ FF | <ul style="list-style-type: none"> ■ in ■ mm |
| Setup → Empty calibration | <ul style="list-style-type: none"> ■ HART ■ PA ■ FF | 0 to 10 m (0 to 30 ft) |
| Setup → Full calibration | <ul style="list-style-type: none"> ■ HART ■ PA ■ FF | 0 to 10 m (0 to 30 ft) |
| Setup → Adv. Setup → Current output 1/2 → Damping | HART | 0 to 999.9 s |
| Setup → Adv. Setup → Current output 1/2 → Failure mode | HART | <ul style="list-style-type: none"> ■ Min ■ Max ■ Last valid value |
| Setup → Adv. Setup → Current output 1/2 → Burst mode | HART | <ul style="list-style-type: none"> ■ Off ■ On |

Accessories

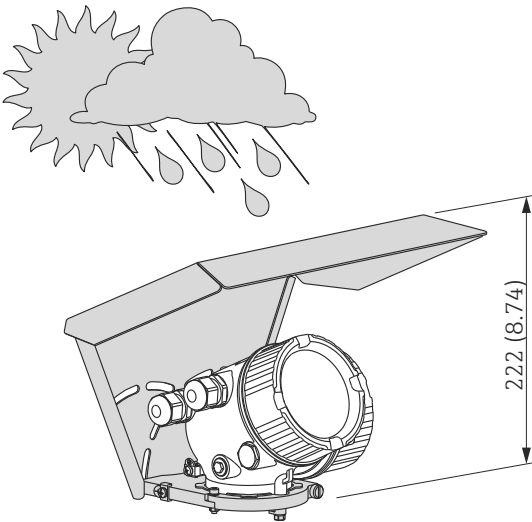Device-specific accessories Weather protection cover

| Accessory | Description |
|--------------------------|--|
| Weather protection cover | <div>A technical drawing of the weather protection cover. At the top left, there is a small icon showing a sun partially obscured by a cloud with rain falling from it. Below this, the main drawing shows the cover in an open position, revealing the internal components of the device. A vertical dimension line on the right indicates a height of 222 (8.74). Below the main drawing, there are two detailed views of the cover's flaps. The left view shows a top-down perspective of the front flap, with a width of 298.5 (11.8) mm and an inner width of 255.1 (10) mm. It also shows a 55° angle and a dimension 'a'. The right view shows a side perspective of the flaps, with a total width of 273.7 (10.8) mm and an inner width of 164 (6.46) mm. It shows a 65° angle, a dimension 'b', and a side height of 156 (6.14) mm. A 35° angle is also indicated at the bottom right of the flap.</div> <div><div>A0015466</div><div>A0015472</div></div> <div><div> 29 Weather protection cover; Dimensions: mm (in)</div><div><div>a 37,8 mm (1,5 in)</div><div>b 54 mm (2,1 in)</div></div><div><div> The weather protection cover can be ordered together with the device (product structure, feature 620 "Accessory Enclosed", option PB "Weather Protection Cover"). Alternatively, it can be separately ordered as an accessory; order code 71162242.</div></div></div> |


Mounting bracket for the electronics housing

| Accessory | Description |
|--|---|
| Mounting bracket for the electronics housing | <div><div><p>A</p><p>122 (4.8) 158 (6.2)</p><p>70 (2.8) 86 (3.4)</p></div><div><p>B</p><p>$\varnothing 42 \dots 60$ (1.65 \dots 2.36)</p><p>52 (2)</p><p>140 (5.5) 175 (6.9)</p></div></div> <p> 30 Mounting bracket for the electronics housing; Dimensions: mm (in)</p> <p>A Wall mounting B Pipe mounting</p> <p> For the "Sensor remote" device version (see feature 060 of the product structure), the mounting bracket is part of the delivery. If required, it can also be ordered as an accessory (order code 71102216).</p> |


Centering star

| Accessory | Description |
|--|--|
| Centering star PFA <ul style="list-style-type: none">■ \varnothing 16.4 mm (0.65 in)■ \varnothing 37 mm (1.46 in) can be used for FMP55 | <div><p>10 (0.39)</p><p>A: $\varnothing 16.4$ (0.65) B: $\varnothing 37$ (1.46)</p></div> <p>A For 8 mm (0.3 in) probes B: For 12 mm (0.47 in) and 16 mm (0.63 in) probes</p> <p>The centering star is suitable for probes with a rod diameter of 8 mm (0.3 in), 12 mm (0.47 in) and 16 mm (0.63 in) (also coated rod probes) and can be used in pipes from DN40 (1½") up to DN50 (2"). See also Operating Instructions BA00378F/00/A2.</p> <ul style="list-style-type: none">■ Material: PFA■ Admissible process temperature: -200 to +200 °C (-382 to +392 °F)■ Order code<ul style="list-style-type: none">- Probe 8 mm (0.3 in): 71162453- Probe 12 mm (0.47 in): 71157270- Probe 16 mm (0.63 in): 71069065 <p> The PFA centering star can also be ordered directly with the device (see the Levelflex product structure, feature 610 "Accessory mounted", option OE).</p> |

Remote display FHX50

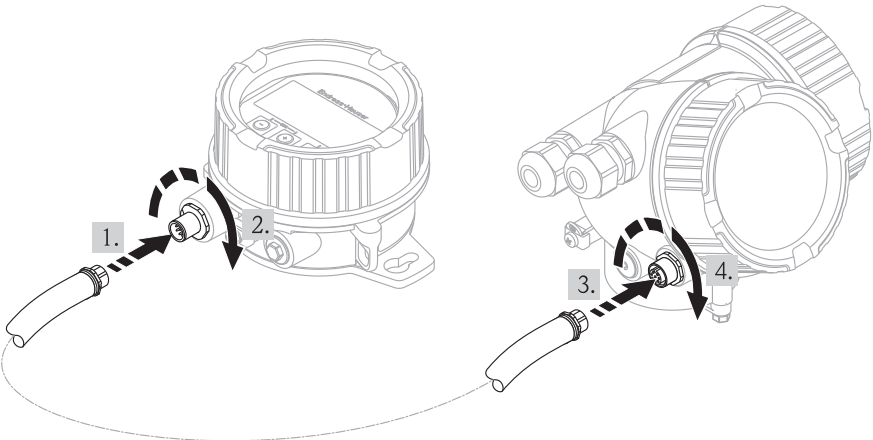
| Accessory | Description |
|----------------------|--|
| Remote display FHX50 |  <p style="text-align: right;">A0019128</p> <ul style="list-style-type: none"> ■ Material: <ul style="list-style-type: none"> – Plastics PBT – 316L ■ Ingress protection: IP68 / NEMA 6P and IP66 / NEMA 4x ■ Suitable for the display modules: <ul style="list-style-type: none"> – SD02 (push buttons) – SD03 (touch control) ■ Connection cable: <ul style="list-style-type: none"> – Cable with M12 plug; supplied with the FHX50; up to 30 m (98 ft) – Customer supplied standard cable; up to 60 m (196 ft) ■ Ambient temperature: –40 to 80 °C (–40 to 176 °F) <p>i ■ If the remote display is to be used, the device must be ordered in the version "Prepared for display FHX50" (feature 030, option L or M). For the FHX50, on the other hand, the option A: "Prepared for display FHX50" has to be selected in feature 050: "Option Measurement Device".</p> <p>■ If a device has not been ordered in the version "Prepared for display FHX50", but is nevertheless to be equipped with an FHX50, it is essential to select the option B: "Not prepared for display FHX50" in feature 050: "Option Measurement Device" of the FHX50. In this case, a retrofit kit, needed to prepare the device for the remote display, is supplied together with the FHX50.</p> <p>i For transmitters with approval, application of the FHX50 may be restricted. A device may only be retrofitted with the FHX50 if option L or M ("Prepared for FHX50") is quoted under <i>Basic specifications</i>, position 4 "Display, operation" in the associated Safety Instructions (XA). In addition to this, observe the Safety Instructions (XA) of the FHX50.</p> <p>i Do not retrofit transmitters with:</p> <ul style="list-style-type: none"> ■ approval for use in areas with combustible dusts (Dust-Ex approval) ■ type of protection Ex nA <p>i For details refer to the document SD01007F.</p> |


Overvoltage protection

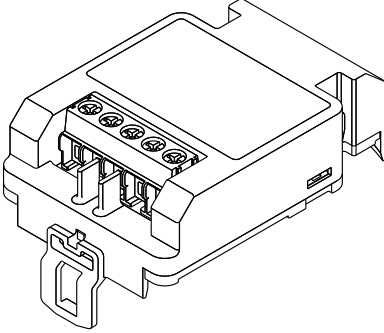
| Accessory | Description |
|---|---|
| Overvoltage protection for 2-wire-devices OVP10 (1 channel) OVP20 (2 channel) | <div></div> <div><p>Technical data</p><ul style="list-style-type: none">■ Resistance per channel: 2 * 0.5 Ω_{max}■ Threshold DC voltage: 400 to 700 V■ Threshold impulse voltage: < 800 V■ Capacitance at 1 MHz: < 1.5 pF■ Nominal arrest impulse voltage (8/20 μs): 10 kA■ Suited for wire cross-sections: 0.2 to 2.5 mm² (24 to 14 AWG)</div> <div><p>Ordering with device</p><p>The overvoltage protection module is preferably ordered with the device. See product structure, feature 610 "Accessory mounted", option NA "Overvoltage protection". Separate ordering of the module is only necessary if a device is to be retrofitted with the overvoltage protection.</p></div> <div><p>Order code for retrofitting</p><ul style="list-style-type: none">■ For 1-channel devices (feature 020, option A) OVP10: 71128617■ For 2-channel devices (feature 020, option B, C, E or G) OVP20 : 71128619</div> <div><p>Housing lid for retrofitting</p><p>In order to keep the necessary safety distances, the housing lid needs to be replaced if the device is retrofitted with the overvoltage protection. Depending on the housing type, the order code of the suitable lid is as follows:</p><ul style="list-style-type: none">■ GT18 housing: Lid 71185516■ GT19 housing: Lid 71185518■ GT20 housing: Lid 71185516</div> <div><p>Restrictions for retrofitting</p><p>Depending on the approval of the transmitter the usage of the OVP module may be restricted. A device may only be retrofitted with an OVP module if the option NA (overvoltage protection) is quoted under <i>Optional Specifications</i> in the Safety Instructions (XA) pertaining to the device.</p></div> <div><p>For details refer to SD01090F.</p></div> |


A0021734


Communication-specific accessories


| Accessory | Description |
|----------------------|--|
| Commubox FXA195 HART | For intrinsically safe HART communication with FieldCare via the USB interface.  For details refer to Technical Information TI00404F |


| Accessory | Description |
|-----------------|--|
| Commubox FXA291 | Connects Endress+Hauser field devices with CDI interface (= Endress+Hauser Common Data Interface) to the USB interface of a computer. Order code: 51516983  For details refer to Technical Information TI00405C |


| Accessory | Description |
|---------------------------|--|
| HART Loop Converter HMX50 | Evaluates the dynamic HART variables and converts them to analog current signals or limit values. Order code: 71063562  For details refer to Technical Information TI00429F and Operating Instructions BA00371F |

| Accessory | Description |
|----------------------------|--|
| WirelessHART Adapter SWA70 | Connects field devices to a WirelessHART network. The WirelessHART adapter can be mounted directly at a HART device and is easily integrated into an existing HART network. It ensures safe data transmission and can be operated in parallel with other wireless networks.  For details refer to Operating Instructions BA00061S |


| Accessory | Description |
|------------------|---|
| Fieldgate FXA320 | Gateway for remote monitoring of connected 4-20mA measuring devices via web browser.  For details refer to Technical Information TI00025S and Operating Instructions BA00053S |

| Accessory | Description |
|------------------|--|
| Fieldgate FXA520 | Gateway for remote diagnosis and parametrization of connected HART measuring devices via web browser.  For details refer to Technical Information TI00025S and Operating Instructions BA00051S |




| Accessory | Description |
|--------------------|---|
| Field Xpert SFX350 | Field Xpert SFX350 is a mobile computer for commissioning and maintenance. It enables efficient device configuration and diagnostics for HART and FOUNDATION fieldbus devices in the non-Ex area .  For details, see Operating Instructions BA01202S |

| Accessory | Description |
|--------------------|--|
| Field Xpert SFX370 | Field Xpert SFX370 is a mobile computer for commissioning and maintenance. It enables efficient device configuration and diagnostics for HART and FOUNDATION fieldbus devices in the non-Ex area and the Ex area .  For details, see Operating Instructions BA01202S |

Service-specific accessories

| Accessory | Description |
|-----------|---|
| FieldCare | Endress+Hauser's FDT-based Plant Asset Management tool. Helps to configure and maintain all field devices of your plant. By supplying status information it also supports the diagnosis of the devices.  For details refer to Operating Instructions BA00027S and BA00059S. |

System components

| Accessory | Description |
|-------------------------------------|--|
| Graphic Data Manager Memograph M | The graphic data manager Memograph M provides information on all the relevant process variables. Measured values are recorded correctly, limit values are monitored and measuring points analyzed. The data are stored in the 256 MB internal memory and also on an SD card or USB stick.  For details refer to Technical Information TI00133R and Operating Instructions BA00247R |
| RN221N | Active barrier with power supply for safe separation of 4 to 20 mA current circuits. Provides bi-directional HART transmission.  For details refer to Technical Information TI00073R and Operating Instructions BA00202R |
| RNS221 | Transmitter supply for 2-wire sensors or transmitters exclusively for non-Ex areas. Provides bi-directional communication using the HART communication sockets.  For details refer to Technical Information TI00081R and Operating Instructions KA00110R |

Documentation



For an overview of the scope of the associated Technical Documentation, refer to the following:

- The *W@M Device Viewer* : Enter the serial number from the nameplate (www.endress.com/deviceviewer)
- The *Endress+Hauser Operations App*: Enter the serial number from the nameplate or scan the 2-D matrix code (QR code) on the nameplate.

Standard documentation

Levellflex FMP55

Correlation of documentations to the device:

| Device | Power supply, output | Communication | Document type | Document code |
|--------|----------------------|---------------------|----------------------------------|---------------|
| FMP55 | A, B, C, K, L | HART | Technical Information | TI01003F |
| | | | Operating Instructions | BA01003F |
| | | | Brief Operating Instructions | KA01060F |
| | | | Description of Device Parameters | GP01000F |
| | G | PROFIBUS PA | Technical Information | TI01003F |
| | | | Operating Instructions | BA01008F |
| | | | Brief Operating Instructions | KA01072F |
| | | | Description of Device Parameters | GP01001F |
| | E | FOUNDATION Fieldbus | Technical Information | TI01003F |
| | | | Operating Instructions | BA01054F |
| | | | Brief Operating Instructions | KA01109F |
| | | | Description of Device Parameters | GP01015F |

Supplementary documentation

| Device | Document type | Document code |
|--------------------------|----------------------------------|---------------|
| Fieldgate FXA520 | Technical Information | TI369F |
| Tank Side Monitor NRF590 | Technical Information | TI402F |
| | Operating Instructions | BA256F |
| | Description of Device Parameters | BA257F |

| Description | Document type | Document code |
|--|---------------------|---------------|
| Continuous level measurement in liquids and bulk solids Selection and engineering guide for the process industry | Competence brochure | CP00023F |

Safety documentation

Safety Instructions (XA)

Depending on the approval, the following Safety Instructions (XA) are supplied with the device. They are an integral part of the Operating Instructions.

| Feature 010 | Approval | Available for | Feature 020: "Power Supply; Output" | | | | |
|-------------|--|---------------|-------------------------------------|-----------------|-----------------|----------------------------------|----------------------------------|
| | | | A ¹⁾ | B ²⁾ | C ³⁾ | E ⁴⁾ /G ⁵⁾ | K ⁶⁾ /L ⁷⁾ |
| BA | ATEX II 1G Ex ia IIC T6 Ga | FMP55 | XA00496F | XA01125F | XA01126F | XA00516F | - |
| BB | ATEX II 1/2G Ex ia IIC T6 Ga/Gb | FMP55 | XA00496F | XA01125F | XA01126F | XA00516F | - |
| BC | ATEX II 1/2G Ex d ia IIC T6 Ga/Gb | FMP55 | XA00499F | XA00499F | XA00499F | XA00519F | XA01133F |
| BD | ATEX II 1/3G Ex ic ia IIC T6 Ga/Gc | FMP55 | XA00497F | XA01127F | XA01128F | XA00517F | - |
| BG | ATEX II 3G Ex nA IIC T6 Gc | FMP55 | XA00498F | XA01130F | XA01131F | XA00518F | XA01132F |
| BH | ATEX II 3G Ex ic IIC T6 Gc | FMP55 | XA00498F | XA01130F | XA01131F | XA00518F | - |
| BL | ATEX II 1/3G Ex nA ia IIC T6 Ga/Gc | FMP55 | XA00497F | XA01127F | XA01128F | XA00517F | XA01129F |
| B2 | ATEX II 1/2G Ex ia IIC T6 Ga/Gb, 1/2D Ex ia IIIC Da/Db | FMP55 | XA00502F | XA00502F | XA00502F | XA00522F | - |
| B3 | ATEX II 1/2G Ex d ia IIC T6 Ga/Gb, 1/2 D Ex t IIIC Da/Db | FMP55 | XA00503F | XA00503F | XA00503F | XA00523F | XA01136F |
| B4 | ATEX II 1/2G Ex ia IIC T6 Ga/Gb, Ex d ia IIC T6 Ga/Gb | FMP55 | XA00500F | XA01134F | XA01135F | XA00520F | - |
| C2 | CSA C/US IS Cl.I,II,III Div.1 Gr.A-G, NI Cl.1 Div.2, Ex ia | FMP55 | XA00530F | XA00530F | XA00530F | XA00571F | XA00530F |
| C3 | CSA C/US XP Cl.I,II,III Div.1 Gr.A-G, NI Cl.1 Div.2, Ex d | FMP55 | XA00529F | XA00529F | XA00529F | XA00570F | XA00529F |
| FB | FM IS Cl.I,II,III Div.1 Gr.A-G, AEx ia, NI Cl.1 Div.2 | FMP55 | XA00531F | XA00531F | XA00531F | XA00573F | XA00531F |
| FD | FM XP Cl.I,II,III Div.1 Gr.A-G, AEx d, NI Cl.1 Div.2 | FMP55 | XA00532F | XA00532F | XA00532F | XA00572F | XA00532F |
| IA | IEC Ex ia IIC T6 Ga | FMP55 | XA00496F | XA01125F | XA01126F | XA00516F | - |
| IB | IEC Ex ia IIC T6 Ga/Gb | FMP55 | XA00496F | XA01125F | XA01126F | XA00516F | - |
| IC | IEC Ex d ia IIC T6 Ga/Gb | FMP55 | XA00499F | XA00499F | XA00499F | XA00519F | XA01133F |
| ID | IEC Ex ic ia IIC T6 Ga/Gc | FMP55 | XA00497F | XA01127F | XA01128F | XA00517F | - |
| IG | IEC Ex nA IIC T6 Gc | FMP55 | XA00498F | XA01130F | XA01131F | XA00518F | XA01132F |
| IH | IEC Ex ic IIC T6 Gc | FMP55 | XA00498F | XA01130F | XA01131F | XA00518F | - |
| IL | IEC Ex nA ia IIC T6 Ga/Gc | FMP55 | XA00497F | XA01127F | XA01128F | XA00517F | XA01129F |
| I2 | IEC Ex ia IIC T6 Ga/Gb, Ex ia IIIC Da/Db | FMP55 | XA00502F | XA00502F | XA00502F | XA00522F | - |
| I3 | IEC Ex d ia IIC T6 Ga/Gb, Ex t IIIC Da/Db | FMP55 | XA00503F | XA00503F | XA00503F | XA00523F | XA01136F |
| KA | KC Ex ia IIC T6 Ga | FMP55 | XA01169F | - | XA01169F | - | - |
| KB | KC Ex ia IIC T6 Ga/Gb | FMP55 | XA01169F | - | XA01169F | - | - |
| KC | KC Ex d ia IIC T6 | FMP55 | - | - | XA01170F | - | - |
| MA | INMETRO Ex ia IIC T6 Ga | FMP55 | XA01038F | XA01038F | XA01038F | - | XA01038F |
| MC | INMETRO Ex d ia IIC T6 Ga/Gb | FMP55 | XA01041F | XA01041F | XA01041F | - | XA01041F |
| MH | INMETRO Ex ic IIC T6 Gc | FMP55 | XA01040F | XA01040F | XA01040F | - | XA01040F |
| NA | NEPSI Ex ia IIC T6 Ga | FMP55 | XA00634F | XA00634F | XA00634F | XA00640F | XA00634F |
| NB | NEPSI Ex ia IIC T6 Ga/Gb | FMP55 | XA00634F | XA00634F | XA00634F | XA00640F | XA00634F |
| NC | NEPSI Ex d ia IIC T6 Ga/Gb | FMP55 | XA00636F | XA00636F | XA00636F | XA00642F | XA00636F |
| NG | NEPSI Ex nA II T6 Gc | FMP55 | XA00635F | XA00635F | XA00635F | XA00641F | XA00635F |
| NH | NEPSI Ex ic IIC T6 Gc | FMP55 | XA00635F | XA00635F | XA00635F | XA00641F | XA00635F |
| N2 | NEPSI Ex ia IIC T6 Ga/Gb, Ex iaD 20/21 T85...90°C | FMP55 | XA00638F | XA00638F | XA00638F | XA00644F | XA00638F |

| Feature 010 | Approval | Available for | Feature 020: "Power Supply; Output" | | | | |
|-------------|---|---------------|-------------------------------------|----------------------|----------------------|----------------------------------|----------------------------------|
| | | | A ¹⁾ | B ²⁾ | C ³⁾ | E ⁴⁾ /G ⁵⁾ | K ⁶⁾ /L ⁷⁾ |
| N3 | NEPSI Ex d[ia] IIC T6 Ga/Gb, DIP A20/21 T85...90°C IP66 | FMP55 | XA00639F | XA00639F | XA00639F | XA00645F | XA00639F |
| 8A | FM/CSA IS+XP Cl.I,II,III Div.1 Gr.A-G | FMP55 | XA00531F XA00532F | XA00531F XA00532F | XA00531F XA00532F | XA00572F XA00573F | XA00531F XA00532F |

- 1) A: 2-wire; 4-20mA HART
2) B: 2-wire; 4-20mA HART, switch output
3) C: 2-wire; 4-20mA HART, 4-20mA
4) E: 2-wire; FOUNDATION Fieldbus, switch output
5) G: 2-wire; PROFIBUS PA, switch output
6) K: 4-wire 90-253VAC; 4-20mA HART
7) L: 4-wire 10,4-48VDC; 4-20mA HART



For certified devices the relevant Safety Instructions (XA) are indicated on the nameplate.

Ex-marking in case of connected FHX50 remote display

If the device is prepared for the remote display FHX50 (product structure: feature 030: Display, Operation", option L or M), the Ex marking of some certificates changes according to the following table ¹¹⁾:

| Feature 010 ("Approval") | Feature 030 ("Display, Operation") | Ex-marking |
|--------------------------|------------------------------------|---|
| BG | L or M | ATEX II 3G Ex nA [ia Ga] IIC T6 Gc |
| BH | L or M | ATEX II 3G Ex ic [ia Ga] IIC T6 Gc |
| B3 | L or M | ATEX II 1/2G Ex d [ia] IIC T6 Ga/Gb, ATEX II 1/2D Ex ta [ia Db] IIIC Txx°C Da/Db |
| IG | L or M | IECEX Ex nA [ia Ga] IIC T6 Gc |
| IH | L or M | IECEX Ex ic [ia Ga] IIC T6 Gc |
| I3 | L or M | IECEX Ex d [ia] IIC T6 Ga/Gb, IECEX Ex ta [ia Db] IIIC Txx°C Da/Db |

11) The marking of certificates not mentioned in this table are not affected by the FHX50.

Registered trademarks

HART®

Registered trademark of the HART Communication Foundation, Austin, USA

PROFIBUS®

Registered trademark of the PROFIBUS User Organization, Karlsruhe, Germany

FOUNDATION™ Fieldbus

Registered trademark of the Fieldbus Foundation, Austin, Texas, USA

KALREZ®, VITON®

Registered trademark of DuPont Performance Elastomers L.L.C., Wilmington, USA

TEFLON®

Registered trademark of E.I. DuPont de Nemours & Co., Wilmington, USA

TRI CLAMP®

Registered trademark of Alfa Laval Inc., Kenosha, USA

Patents

This product may be protected by at least one of the following patents.

Further patents are pending.

| US Patents | EP Patents |
|------------|------------|
| 5.827.985 | --- |
| 5.884.231 | --- |
| 5.973.637 | --- |
| 6.087.978 | 955 527 |
| 6.140.940 | --- |
| 6.481.276 | --- |
| 6.512.358 | 1 301 914 |
| 6.559.657 | 1 020 735 |
| 6.640.628 | --- |
| 6.691.570 | --- |
| 6.847.214 | --- |
| 7.441.454 | --- |
| 7.477.059 | --- |
| --- | 1 389 337 |
| 7.965.087 | --- |



www.addresses.endress.com
