

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

## Technical description

1

### Overview



SITRANS P320/P420 pressure transmitters are digital pressure transmitters featuring extensive user-friendliness and high accuracy. The parameter assignment is performed using input buttons or the HART interface.

The comprehensive functionality makes for precise adjustment of the pressure transmitter to the requirements of the plant. Operation is very user-friendly in spite of the numerous setting options.

Due to their advanced diagnostic functionalities according to NAMUR NE107, the SITRANS P320/P420 pressure transmitters are very suitable for use in chemical plants. Thanks to the advanced diagnostic functions and the process value storage, the SITRANS P420 is "Ready for Digitalization".

The "Remote Safety Handling" function saves customers significant amounts of time and money, because the SIL function can be switched on and validated remotely via SIMATIC PDM. This eliminates travel times and on-site operation via the local display or keyboard.

Parameter assignment using the HART protocol is very easy and quick thanks to the innovative EDD with integrated Quick Start wizard.

The transmitters can be equipped with various types of remote seals for special applications such as the measurement of highly viscous substances.

SITRANS P320/P420 pressure transmitters are available in various versions for measuring:

- Gauge pressure
- Absolute pressure
- Differential pressure
- Level
- Volume flow
- Mass flow

### Benefits

- Diagnostic functions in accordance with NAMUR recommendation NE107
- SIL devices developed according to IEC 61508
- SIL validation on the device or remotely with SIMATIC PDM
- Reduction of internal inductance for Ex applications to LI = 0
- Step response time for pressure type T63 = 105 ms and for differential pressure type 135 ms.
- Minimal conformity error
- Very low temperature influence
- Very good long-term stability
- High quality and service life
- High reliability even under extreme chemical and mechanical loads
- For corrosive and non-corrosive gases, vapors and liquids
- Extensive diagnostics and simulation functions
- Separate replacement of measuring cell and electronics without recalibration
- Wetted parts made of high-grade materials (e.g., stainless steel, alloy, gold, Monel, tantalum)
- Infinitely adjustable measuring spans from 0.01 bar to 700 bar (0.15 psi to 10153 psi)
- Convenient parameterization over 4 input buttons and HART interface

### Application

SITRANS P320/P420 pressure transmitters can be used in industrial areas with extreme chemical and mechanical loads.

The pressure transmitters can be used in zone 1 or zone 0 with the corresponding Ex approval.

The transmitters can be equipped with various designs of remote seals for special applications such as the measurement of highly viscous substances.

The pressure transmitter can be operated locally over 4 input buttons or programmed externally over HART interface.

#### **Pressure transmitter for gauge pressure**

Measured variable:

- Gauge pressure of corrosive and non-corrosive gases, vapors and liquids.

Measuring span (infinitely adjustable)

- For SITRANS P320/P420 with HART: 0.01 bar to 700 bar (0.15 psi to 10153 psi)

There are two series:

- Gauge pressure series
- Differential pressure series

#### **Pressure transmitters for absolute pressure**

Measured variable:

- Absolute pressure of corrosive and non-corrosive gases, vapors and liquids.

Measuring span (infinitely adjustable)

- For SITRANS P320/P420 with HART: 8.3 mbar a to 100 bar a (0.12 to 1450 psi a)

There are two series:

- Gauge pressure series
- Differential pressure series

**Pressure transmitters for differential pressure and flow**

Measured variables:

- Differential pressure
- Small positive or negative overpressure
- Flow  $q \sim \sqrt{\Delta p}$  (together with a primary differential pressure transducer (see section "Flow meters"))

Measuring span (infinitely adjustable)

- For SITRANS P320/P420 with HART: 1 mbar to 30 bar (0.0145 to 435 psi)

**Pressure transmitters for level**

Measured variable:

- Level of corrosive and non-corrosive liquids in open and closed vessels.

Measuring span (infinitely adjustable)

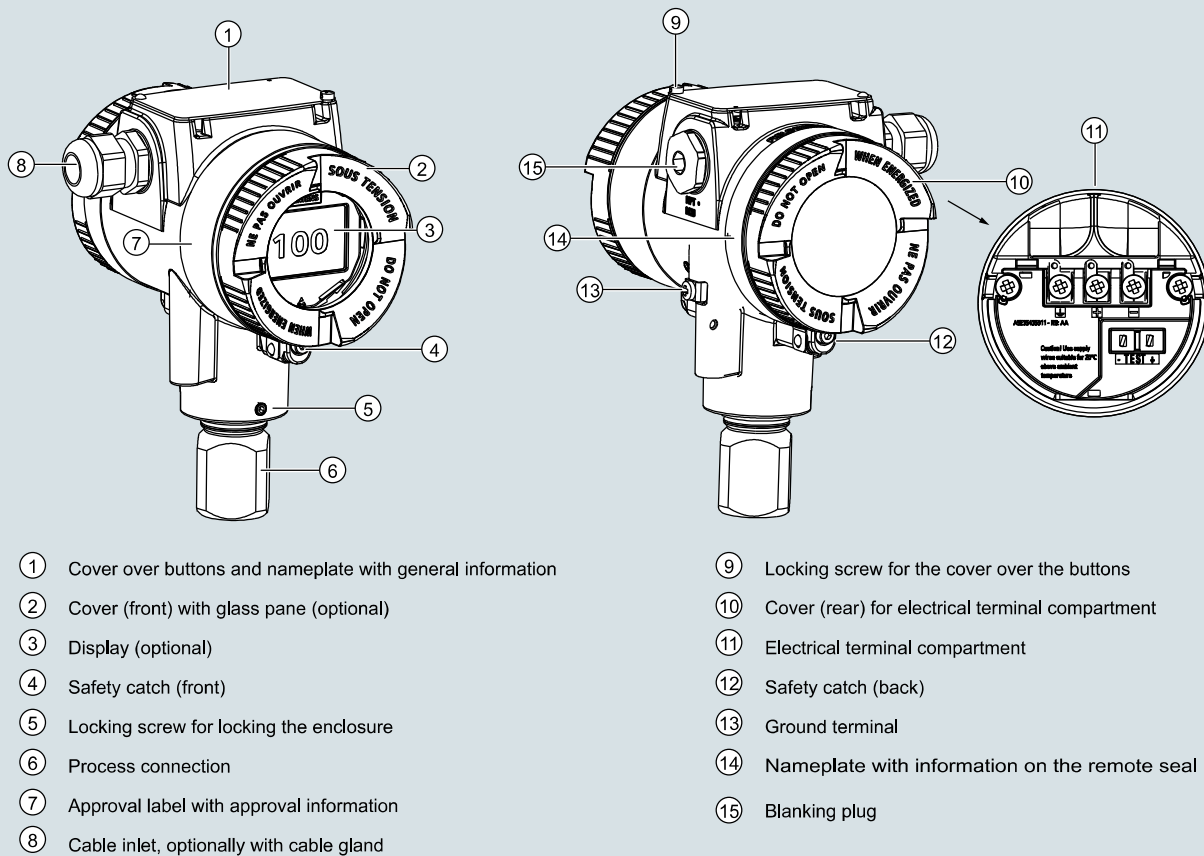
- For SITRANS P320/P420 with HART: 25 mbar to 5 bar (0.363 to 72.5 psi)

Type of the mounting flange:

- EN 1092-1 flanges
- ASME B16.5 flanges
- J.I.S. flanges
- Diverse range of sealing surface forms available

**Design**

Depending on the customer-specific order, the device comprises different parts.

**Device front view**

- The electronics enclosure is made of die cast aluminum or precision cast stainless steel.
- The enclosure has a removable circular cover at the front and the back.
- Depending on the device version, the front cover (2) may be designed as an inspection window.
- The cable inlet (8) to the electrical terminal compartment is at the side; either the left or right-hand one can be used. The unused opening is closed with a blanking plug (15).
- The ground terminal (13) is located on the side.

- The electrical terminal compartment (11) for the auxiliary power and shield is accessible when you remove the back cover (10).
- The measuring cell with process connection (6) is located in the bottom part of the enclosure. The measuring cell is prevented from rotating by a locking screw (5).
- Thanks to the modular design of the pressure transmitter, the measuring cell and application electronics or terminal compartment can be replaced if required.
- The cover over buttons (1), under which there are 4 buttons, is located on the upper face of the enclosure. The nameplate with general information is located on the cover over the buttons.

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

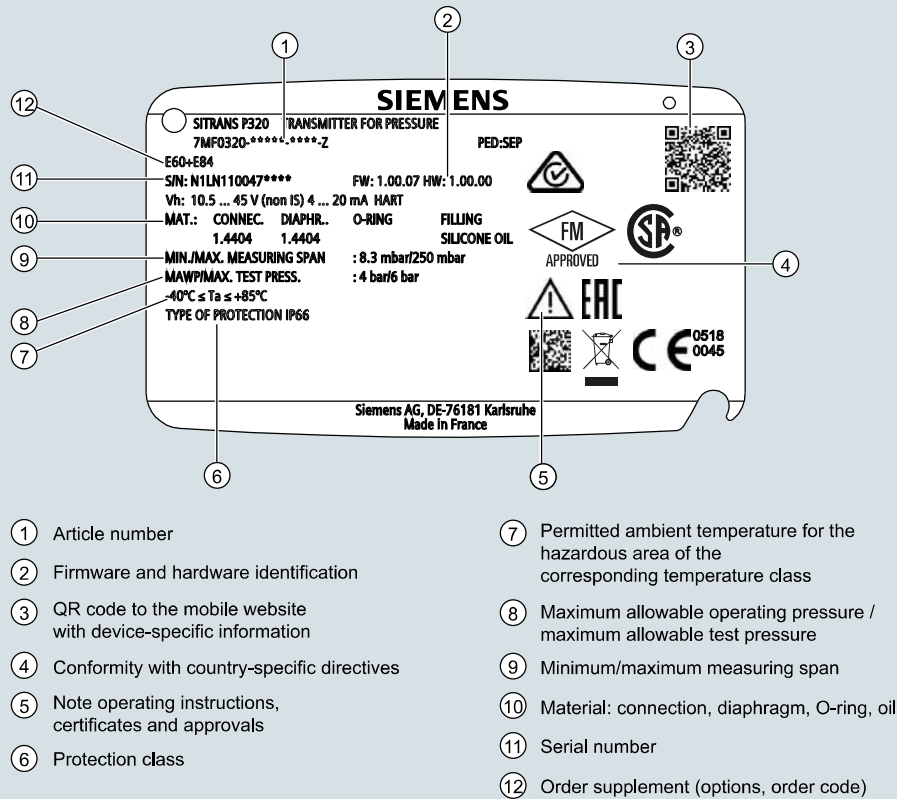
1

## Technical description

### Nameplates

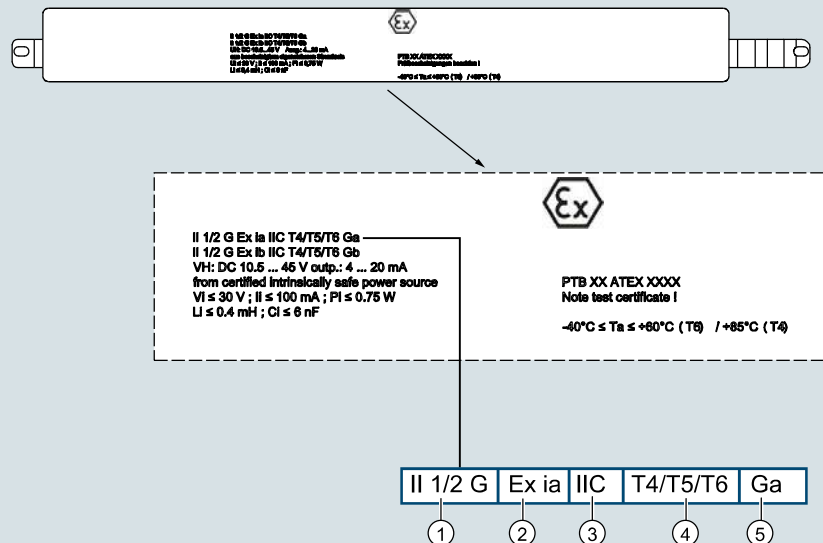
#### Nameplate

The nameplate with the article no. and other important information, such as design details and technical data, is located on the cover over the buttons.



#### Approval label with approval information

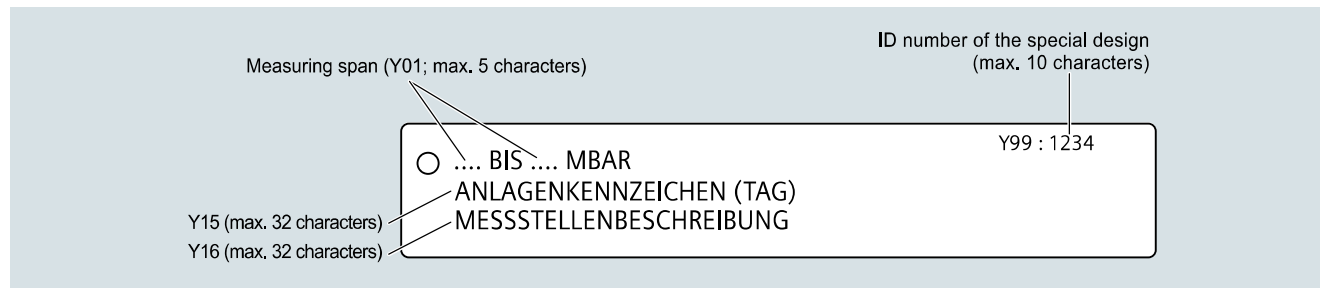
The approval label with approval information is located on the front of the enclosure.



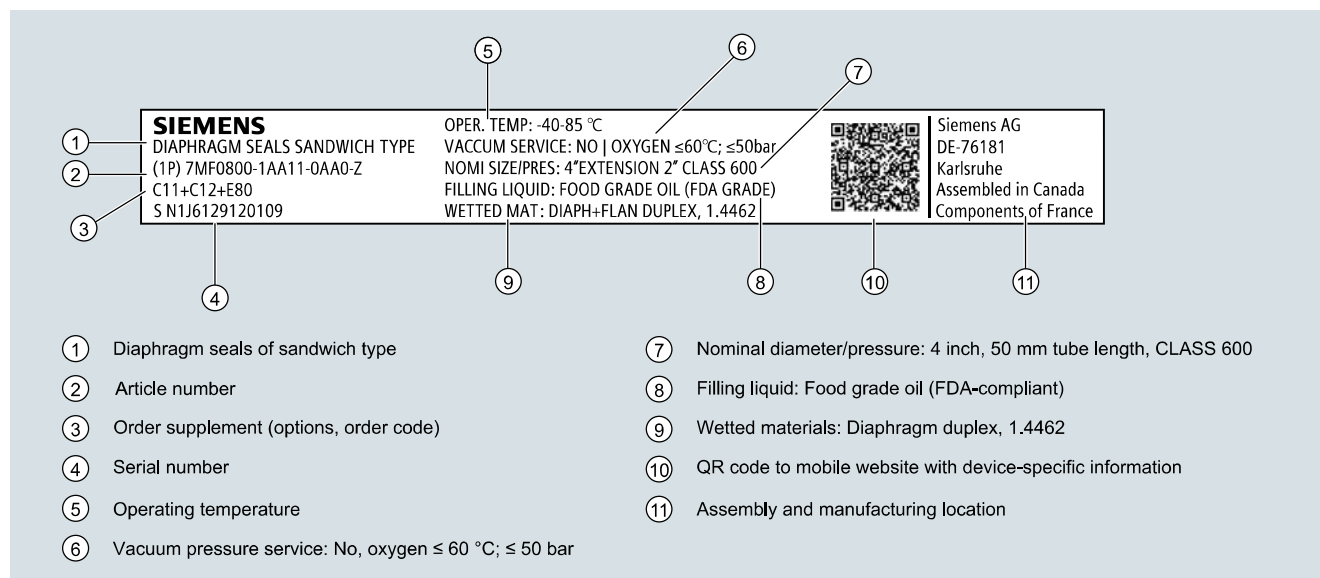
- ① Characteristics of the hazardous area
- ② Type of protection
- ③ Group (gas, dust)
- ④ Maximum surface temperature (temperature class)
- ⑤ Device protection level

Measuring point label

The measuring point label is located under the front cover.

Nameplate with information on the remote seals

The nameplate with information on the remote seals is located on the back of the enclosure.





# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

## Technical description

1

### Function

#### Adjustable parameters and diagnostics

SITRANS P320/P420 with HART communication

Parameters	Input buttons	SITRANS P320	SITRANS P420
Application, measurement type	x	x	x
Lower range value/ upper range value	x	x	x
Lower range value/ upper range value	x	x	x
Electrical damping	x	x	x
Zero adjustment	x	x	x
Fault current	x	x	x
Saturation limits	x	x	x
Scaling of the display	x	x	x
Characteristic selection	x	x	x
Temperature unit	x	x	x
Key lock	x	x	x
Change user pin	x	x	x
Functional safety	x	x	x
Loop test	x	x	x
Start view	x	x	x
Pressure reference	x	x	x
Reset	x	x	x
<b>Diagnostics and trend log</b>			
Min/Max pointer		x	x
Limit monitoring		2	2
Event counter (overflow/underflow)		2	2
Trend log			2, max. 1 500 values
Diagnostic log		x	x
Parameters change log			x

Available physical units of display for SITRANS P320/P420

Physical variable	Physical dimensions
Pressure (setting can also be made in the factory)	Pa, MPa, kPa, hPa, bar, mbar, psi, g/cm <sup>2</sup> , kg/cm <sup>2</sup> , kgf/cm <sup>2</sup> , inH <sub>2</sub> O, inH <sub>2</sub> O (4 °C), ftH <sub>2</sub> O, mmH <sub>2</sub> O, mmH <sub>2</sub> O (4 °C), mH <sub>2</sub> O (4 °C), mmHg, inHg, atm, torr
Level (height data)	m, cm, mm, ft, in
Volumes (fill level)	m <sup>3</sup> , l, hl, in <sup>3</sup> , ft <sup>3</sup> , yd <sup>3</sup> , gal, gal (UK), bu, bbl, bbl (US), SCF, Nm <sup>3</sup> , NI
Volume (flow)	m <sup>3</sup> /sec, m <sup>3</sup> /h, m <sup>3</sup> /d, l/sec, l/min, l/h, MI/d, ft <sup>3</sup> /sec, ft <sup>3</sup> /h, ft <sup>3</sup> /d, SCF/min, SCF/h, NI/h, Nm <sup>3</sup> /hgal/sec, gal/min, gal/h, gal/d, Mgal/d, gal (UK)/sec, gal (UK)/min, gal (UK)/h, gal (UK)/d, bbl/sec, bbl/min, bbl/h, bbl/d
Mass (flow)	Kg/sec, kg/min, kg/h, kg/d, g/sec, g/min, g/h, t/min, t/h, t/d, lb/sec, lb/min, lb/h, lb/d, ton/min, ton/h, ton/d, ton (UK)/h, ton (UK)/d
Temperature	°C, °F
Miscellaneous	%, mA, free text max. 12 characters

For more device information and technical specifications, refer to the individual device versions.

## Technical specifications

## SITRANS P320 / SITRANS P420 for gauge pressure (pressure series)

## Input

Measured variable	Gauge pressure		
Measuring span (infinitely adjustable) or measuring range, max. permissible operating pressure (in accordance with Pressure Equipment Directive 2014/68/EU) and max. test pressure (pursuant to DIN 16086) (for oxygen measurement, max. 100 bar/10 MPa/1450 psi and 60 °C (140 °F) ambient temperature/temperature of medium)	Measuring span	Max. permissible operating pressure MAWP (PS)	Maximum permissible test pressure
	8.3 ... 250 mbar	4 bar	6 bar
	0.83 ... 25 kPa	0.4 MPa	0.6 MPa
	0.12 ... 3.6 psi	58 psi	87 psi
	0.01 ... 1 bar	6 bar	9 bar
	1 ... 100 kPa	0.6 MPa	0.9 MPa
	0.15 ... 14.5 psi	87 psi	130 psi
	0.04 ... 4 bar	20 bar	30 bar
	4 ... 400 kPa	2 MPa	3 MPa
	0.58 ... 58 psi	290 psi	435 psi
	0.16 ... 16 bar	45 bar	70 bar
	0.016 ... 1.6 MPa	4.5 MPa	7 MPa
	2.3 ... 232 psi	652 psi	1015 psi
	0.63 ... 63 bar	80 bar	120 bar
	0.063 ... 6.3 MPa	8 MPa	12 MPa
	9.1 ... 914 psi	1160 psi	1740 psi
	1.6 ... 160 bar	240 bar	360 bar
	0.16 ... 16 MPa	24 MPa	36 MPa
	23 ... 2321 psi	3481 psi	5221 psi
	4 ... 400 bar	400 bar	600 bar
	0.4 ... 40 MPa	40 MPa	60 MPa
	58 ... 5802 psi	5802 psi	8702 psi
	7 ... 700 bar	800 bar	800 bar
	0.7 ... 70 MPa	80 MPa	80 MPa
	102 ... 10153 psi	11603 psi	11603 psi
Measuring limits	For 250 mbar/25 kPa/3.6 psi measuring cells, the lower measuring limit is 750 mbar a/75 kPa a/10.8 psi a. The measuring cell is vacuum-resistant up to 30 mbar a/3 kPa a/0.44 psi a.		
• Low measuring limit	30 mbar a/3 kPa a/0.44 psi a		
- Measuring cell with silicone oil filling	30 mbar a/3 kPa a/0.44 psi a		
- Measuring cell with inert oil	100 mbar a/10 kPa a/1.45 psi a		
- Measuring cell with FDA-compliant oil	100% of the max. measuring span (for oxygen measurement max. 100 bar/10 MPa/ 1450 psi and 60 °C (140 °F) ambient temperature/temperature of medium)		
• Upper measuring limit	Between the measuring limits (infinitely adjustable)		
• Lower range value			

## Output

Output signal	4 ... 20 mA
• Low saturation limit (infinitely adjustable)	3.55 mA, factory preset to 3.8 mA
• High saturation limit (infinitely adjustable)	22.8 mA, factory-set to 20.5 mA or optionally 22.0 mA
• Ripple (without HART communication)	$I_{pp} \leq 0.5\%$ of max. output current
Adjustable damping	0 ... 100 s, continuously adjustable over remote operation
	0 ... 100 s, in increments of 0.1 s, adjustable over display
• Current transmitter	3.55 ... 22.8 mA
• Failure signal	3.55 ... 22.8 mA (factory preset to 3.55 mA)
Load	Resistor R [ $\Omega$ ]
• Without HART communication	$R = (U_H - 10.5 \text{ V})/22.8 \text{ mA}$ , $U_H$ : Power supply in V
• With HART communication	$R = 230 \dots 1100 \Omega$ (HART communicator (handheld)) $R = 230 \dots 500 \Omega$ (SIMATIC PDM)
Characteristic curve	<ul style="list-style-type: none"> <li>• Linearly increasing or linearly decreasing</li> <li>• Linear increase or decrease or according to the square root (only for differential pressure and flow)</li> </ul>
Physical bus	-
Polarity-independent	-

# Pressure Measurement

## Pressure transmitters

for applications with advanced requirements (Advanced)

SITRANS P320/P420

for gauge pressure (pressure series)

1

### SITRANS P320 / SITRANS P420 for gauge pressure (pressure series)

#### Measuring accuracy

Reference conditions

- According to EN 60770-1
- Rising characteristic curve
- Lower range value 0 bar/kPa/psi
- Seal diaphragm stainless steel
- Measuring cell with silicone oil filling
- Room temperature 25 °C (77 °F)

Conformity error at limit point setting, including hysteresis and repeatability

Measuring span ratio  $r$  (spread, Turn-Down)

- Linear characteristic
- 250 mbar/25 kPa/3.6 psi

$r = \text{max. measuring span/set measuring span and nominal measuring range}$

$r \leq 1.25$ :  $\leq 0.075\%$  (SITRANS P320)

$\leq 0.065\%$  (SITRANS P420)

$1.25 < r \leq 30$ :  $\leq (0.008 \cdot r + 0.055)\%$

$r \leq 5$ :  $\leq 0.065\%$  (SITRANS P320)

$\leq 0.04\%$  (SITRANS P420)

$5 < r \leq 100$ :  $\leq (0.004 \cdot r + 0.045)\%$

$r \leq 3$ :  $\leq 0.075\%$  (SITRANS P320)

$3 < r \leq 100$ :  $\leq (0.005 \cdot r + 0.05)\%$  (SITRANS P320)

$r \leq 5$ :  $\leq 0.075\%$  (SITRANS P420)

$5 < r \leq 100$ :  $\leq (0.005 \cdot r + 0.05)\%$  (SITRANS P420)

Influence of ambient temperature  
in % per 28 °C (50 °F)

- 250 mbar/25 kPa/3.6 psi
- 1 bar/100 kPa/14.5 psi
- 4 bar/400 kPa/58 psi
- 16 bar/1.6 MPa/232 psi
- 63 bar/6.3 MPa/914 psi
- 160 bar/16 MPa/2321 psi
- 400 bar/40 MPa/5802 psi
- 700 bar/70 MPa/10152 psi

$\leq (0.16 \cdot r + 0.1)\%$

$\leq (0.05 \cdot r + 0.1)\%$

$\leq (0.025 \cdot r + 0.125)\%$

$\leq (0.08 \cdot r + 0.16)\%$

Long-term stability at  $\pm 30$  °C ( $\pm 54$  °F)

- 250 mbar/25 kPa/3.6 psi
- 1 bar/100 kPa/14.5 psi
- 4 bar/400 kPa/58 psi
- 16 bar/1.6 MPa/232 psi
- 63 bar/6.3 MPa/914 psi
- 160 bar/16 MPa/2321 psi
- 400 bar/40 MPa/5802 psi
- 700 bar/70 MPa/10152 psi

$\leq (0.25 \cdot r)\%$  per year

In 5 years  $\leq (0.25 \cdot r)\%$

In 10 years  $\leq (0.35 \cdot r)\%$

In 5 years  $\leq (0.125 \cdot r)\%$

In 10 years  $\leq (0.15 \cdot r)\%$

In 5 years  $\leq (0.25 \cdot r)\%$

In 10 years  $\leq (0.35 \cdot r)\%$

Step response time  $T_{63}$  (without electrical damping)

$\leq 0.105$  s

Effect of mounting position (in pressure per change of angle)

$\leq 0.05$  mbar/0.005 kPa/0.000725 psi per 10° incline  
(zero point correction is possible with position error compensation)

Effect of auxiliary power (in % per voltage change)

0.005% per 1 V

**SITRANS P320 / SITRANS P420 for gauge pressure (pressure series)****Operating conditions**

Temperature of medium

- Measuring cell with silicone oil filling -40 ... +100 °C (-40 ... +212 °F)
- Measuring cell with inert oil
  - 1 bar/100 kPa/14.5 psi -40 ... +100 °C (-40 ... +212 °F)
  - 4 bar/400 kPa/58 psi
  - 16 bar/1.6 MPa/232 psi
  - 63 bar/6.3 MPa/914 psi
  - 160 bar/16 MPa/2321 psi -20 ... +100 °C (-4 ... +212 °F)
  - 400 bar/40 MPa/5802 psi
  - 700 bar/70 MPa/10152 psi
- Measuring cell with FDA-compliant oil -10 ... +100 °C (14 ... +212 °F)

Ambient conditions

- Ambient temperature/enclosure
  - Observe the temperature class in areas subject to explosion hazard.
  - Measuring cell with silicone oil filling -40 ... +85 °C (-40 ... +185 °F)
  - Measuring cell with inert oil for gauge pressure measuring cells: -40 ... +85 °C (-40 ... +185 °F)
    - 1 bar/100 kPa/14.5 psi
    - 4 bar/400 kPa/58 psi
    - 16 bar/1.6 MPa/232 psi
    - 63 bar/6.3 MPa/914 psi
  - Measuring cell with inert oil -40 ... +85 °C (-40 ... +185 °F)
  - Measuring cell with FDA-compliant oil -10 ... +85 °C (14 ... +185 °F)
  - Display -20 ... +80 °C (-4 ... +176 °F)
- Storage temperature -50 ... +85 °C (-58 ... +185 °F) (with FDA-compliant oil: -20 ... +85 °C (-4 ... +185 °F))
- Climatic class in accordance with IEC 60721-3-4 4K4H
- Degree of protection
  - According to IEC 60529 IP66, IP68
  - According to NEMA 250 Type 4X
- Electromagnetic compatibility
  - Emitted interference and interference immunity According to IEC 61326 and NAMUR NE 21

**Design**

Weight

Approx. 2.3 kg (5.07 lb) with aluminum enclosure  
Approx. 4.2 kg (9.25 lb) for stainless steel enclosure

Material

- Wetted parts materials
  - Process connection Stainless steel, material no. 1.4404/316L or Alloy C22, material no. 2.4602
  - Oval flange Stainless steel, mat. no. 1.4404/316L
  - Seal diaphragm Stainless steel, material no. 1.4404/316L or Alloy C276, material no. 2.4819
- Non-wetted parts materials
  - Electronics enclosure
    - Low-copper die-cast aluminum GD-AISI 12 or stainless steel precision casting, mat. no. 1.4409/ CF-3M
    - Standard: Powder coating with polyurethane
    - Option: 2 coats: Coat 1: epoxy-based; coat 2: Polyurethane
    - Stainless steel type plate (1.4404/316L)
  - Mounting bracket Electroplated steel or stainless steel

Process connection

- Connection shank G1/2A according to DIN EN 837-1
- Female thread ½-14 NPT
- Male thread M20 x 1.5 and ½-14 NPT
- Oval flange (PN 160 (MWP 2320 psi g)) with fastening screw thread:
  - 7/16-20 UNF according to EN 61518
  - M10 according to DIN 19213
- Oval flange (PN 420 (MWP 2320 psi g)) with fastening screw thread:
  - 7/16-20 UNF according to EN 61518
  - M12 according to DIN 19213
- Male thread M20 x 1.5 and ½-14 NPT

Electrical connection

- Cable entry via the following screwed glands:
- M20 x 1.5
  - ½-14 NPT
  - Device plug Han 7D/Han 8D<sup>1)</sup>
  - Device plug M12

**Displays and controls**

Keys

4 keys for operation directly on the device

Display

- With or without integrated display (optional)
- Cover with inspection window (optional)

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for gauge pressure (pressure series)

1

## SITRANS P320 / SITRANS P420 for gauge pressure (pressure series)

### Auxiliary power $U_H$

Terminal voltage on pressure transmitter	10.5 ... 45 V DC 10.5 ... 30 V DC in intrinsically safe mode
Ripple	$U_{SS} \leq 0.2 \text{ V}$ (47 ... 125 Hz)
Noise	$U_{eff} \leq 1.2 \text{ mV}$ (0.5 ... 10 kHz)
Auxiliary power	—
Separate supply voltage	—

### Certificates and approvals

Classification according to pressure equipment directive (PED 2014/68/EU) For gases of fluid group 1 and liquids of fluid group 1; complies with requirements of article 4, paragraph 3 (sound engineering practice)

Drinking water

- WRAS (England)
- ACS (France)
- NSF (USA)

CRN (Canada)

Explosion protection acc. to NEPSI (China)

Explosion protection acc. to INMETRO (Brazil)

Explosion protection

- Intrinsic safety "i"

- Marking
- Permissible ambient temperature
- Permissible temperature of measuring medium
- Connection

- Effective internal inductance/capacitance

- Flameproof enclosure "d"

- Marking
- Permissible ambient temperature
- Permissible temperature of measuring medium
- Connection

- Dust explosion protection for zones 21, 22

- Marking
- Permissible ambient temperature
- Permissible temperature of measuring medium
- Max. surface temperature
- Connection

- Dust explosion protection for zones 20, 21, 22

- Marking
- Permissible ambient temperature
- Permissible temperature of measuring medium
- Connection

- Effective internal inductance/capacitance

No.: 1903094 (option E83)  
No.: 18 ACC LY 277 (option E85)  
No.: 20180920-MH61350 (option E84)  
No.: 0F9863.5C (option E60)  
No.: GYJ19.1058X (option E27)  
No.: BRA-18-GE-0035X (option E25)

II 1/2 G Ex ia/ib IIC T4/T6 Ga/Gb  
-40 ... +80 °C (-40 ... +176 °F) temperature class T4  
-40 ... +55 °C (-40 ... +131 °F) temperature class T6  
-40 ... +100 °C (-40 ... +212 °F) temperature class T4  
-40 ... +70 °C (-40 ... +158 °F) temperature class T6  
To certified intrinsically safe circuits with peak values:  
 $U_i = 30 \text{ V}$ ,  $I_i = 101 \text{ mA}$ ,  $P_i = 760 \text{ mW}$   
 $U_i = 29 \text{ V}$ ,  $I_i = 110 \text{ mA}$ ,  $P_i = 800 \text{ mW}$   
 $L_i = 0.24 \text{ } \mu\text{H}/C_i = 3.29 \text{ nF}$

Ex II 1/2 G Ex ia/db IIC T4/T6 Ga/Gb  
-40 ... +80 °C (-40 ... +176 °F) temperature class T4  
-40 ... +70 °C (-40 ... +158 °F) temperature class T6  
-40 ... +100 °C (-40 ... +212 °F) temperature class T4  
-40 ... +70 °C (-40 ... +158 °F) temperature class T6  
To a circuit with the operating values:  
 $U_n = 10.5 \text{ to } 45 \text{ V}$ ,  $4 \text{ ... } 20 \text{ mA}$

Ex II 2D Ex tb IIIC T120 °C Db  
Ex II 3D Ex tc IIIC T120 °C Dc  
-40 ... +80 °C (-40 ... +176 °F)  
-40 ... +100 °C (-40 ... +212 °F)  
120 °C (248 °F)  
To a circuit with the operating values:  
 $U_n = 10.5 \text{ to } 45 \text{ V}$ ,  $4 \text{ ... } 20 \text{ mA}$

Ex II 1D Ex ia IIIC T120 °C Da  
Ex II 2D Ex ib IIIC T120 °C Db  
-40 ... +80 °C (-40 ... +176 °F)  
-40 ... +100 °C (-40 ... +212 °F)  
To certified intrinsically safe circuits with the peak values:  
 $U_i = 30 \text{ V}$ ,  $I_i = 101 \text{ mA}$ ,  $P_i = 760 \text{ mW}$   
 $U_i = 29 \text{ V}$ ,  $I_i = 110 \text{ mA}$ ,  $P_i = 800 \text{ mW}$   
 $L_i = 0.24 \text{ } \mu\text{H}/C_i = 3.29 \text{ nF}$

**SITRANS P320 / SITRANS P420 for gauge pressure (pressure series)**

<ul style="list-style-type: none"> <li>• Type of protection for Zone 2           <ul style="list-style-type: none"> <li>- Marking</li> <li>- Permissible ambient temperature "ec"</li> <li>- Permissible temperature of measuring medium</li> <li>- "ec" connection</li> </ul> </li> <li>• Explosion protection acc. to FM           <ul style="list-style-type: none"> <li>- Marking (XP/DIP) or IS; NI; S</li> </ul> </li> <li>• Explosion protection according to CSA           <ul style="list-style-type: none"> <li>- Marking (XP/DIP) or (IS)</li> </ul> </li> </ul>	<p>Ex II 3G Ex ec IIC T4/T6 Gc</p> <p>-40 ... +80 °C (-40 ... +176 °F) temperature class T4 -40 ... +40 °C (-40 ... +104 °F) temperature class T6 -40 ... +100 °C (-40 ... +212 °F) temperature class T4 -40 ... +70 °C (-40 ... +158 °F) temperature class T6</p> <p>To a circuit with the operating values: <math>U_n = 10,5</math> to 30 V, 4 ... 20 mA</p> <p>Available soon</p> <p>CL I, DIV 1, GP ABCD T4 ... T6; CL II, DIV 1, GP EFG; CL III; Ex ia IIC T4 ... T6: CL I, DIV 2, GP ABCD T4 ... T6; CL II, DIV 2, GP FG; CL III</p> <p>Available soon</p> <p>CL I, DIV 1, GP ABCD T4 ... T6; CL II, DIV 1, GP EFG; CL III; Ex ia IIC T4 ... T6: CL I, DIV 2, GP ABCD T4 ... T6; CL II, DIV 2, GP FG; CL III</p>
NAMUR recommendations	
<ul style="list-style-type: none"> <li>• NE 06</li> <li>• NE 21</li> <li>• NE 23</li> <li>• NE 43</li> <li>• NE 53</li> <li>• NE 80</li> <li>• NE 105</li> <li>• NE 107</li> <li>• NE 131</li> </ul>	<p>Standardized Electrical Signals and Questions Relating to Engineering Technology</p> <p>Electromagnetic Compatibility (EMC) of Industrial Process and Laboratory Control Equipment</p> <p>Extra Low Voltage Circuits with Safe Separation</p> <p>Standardization of the Signal Level for the Failure Information of Digital Transmitters</p> <p>Software and Hardware of Field Devices and Signal Processing Devices with Digital Electronics</p> <p>The Application of the Pressure Equipment Directive to Process Control Devices</p> <p>Specifications for Integrating Fieldbus Devices in Engineering Tools for Field Devices</p> <p>Self-Monitoring and Diagnosis of Field Devices</p> <p>NAMUR Standard Device - Field Devices for Standard Applications</p>

<sup>1)</sup> Han 8D is identical to Han 8U.

**HART communication**

HART	230 ... 1100 Ω
Protocol	HART 7
Software for computer	SIMATIC PDM

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for gauge pressure (pressure series)

1

## Selection and ordering data

	Article No.
<b>Pressure transmitters for gauge pressure (pressure series)</b>	
<b>SITRANS P320</b>	➤ 7MF030 - - - - -
<b>SITRANS P420</b>	➤ 7MF040 - - - - -
➤ Click on the Article no. for the online configuration in the PIA Life Cycle Portal.	
<b>Communication</b>	
HART, 4 ... 20 mA	0
<b>Measuring cell filling</b>	
Silicone oil	1
Inert liquid	3
Neobee oil	4
<b>Maximum measuring span</b>	
250 mbar (3.6 psi)	F
1000 mbar (14.5 psi)	J
4000 mbar (58 psi)	N
16 bar (232 psi)	Q
63 bar (914 psi)	T
160 bar (2321 psi)	V
400 bar (5802 psi)	W
700 bar (10153 psi)	X
<b>Process connection</b>	
Male thread M20 x 1.5	B
Male thread G½ (DIN EN 837-1)	D
Female thread ½-14 NPT	E
Male thread ½-14 NPT	F
Oval flange, mounting thread: 7/16-20 UNF (IEC 61518)	G
Oval flange, mounting thread: M10 (DIN 19213)	H
Oval flange, mounting thread: M12 (DIN 19213)	J
Version for diaphragm seal pressure	U
<b>Wetted parts materials: Process connection, seal diaphragm</b>	
Stainless steel 316L/1.4404, stainless steel 316L/1.4404	0
Stainless steel 316L/1.4404, alloy C276/2.4819	1
Alloy C22/2.4602, alloy C276/2.4819	2
<b>Non-wetted parts materials</b>	
Die-cast aluminum	1
Stainless steel precision casting CF3M/1.4409 similar to 316L	2
<b>Enclosure</b>	
Dual chamber device	5
<b>Type of protection</b>	
Without Ex	A
Intrinsic safety	B
Flameproof enclosure	C
Flameproof enclosure, intrinsic safety	D
Dust protection by enclosure Zone 21/22 (DIP), increased safety Zone 2	L
Dust protection by enclosure Zone 20/21/22 (DIP), increased safety Zone 2	M
Combination of options B, C and L (zone model)	S
Combination of options B, C and M (zone model, Class DCable gland must be ordered separately as option (Axx)ivision)	T
<b>Electrical connections/cable entries</b>	
Thread for cable gland: Cable gland must be ordered separately as option (Axx)	
• 2 x M20 x 1.5	F
• 2 x ½-14 NPT	M
<b>Local operation/display</b>	
Without display (cover closed)	0
With display (cover closed)	1
With display (cover with glass pane)	2



# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for gauge pressure (pressure series)

1

**Selection and ordering data**

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Cable glands included</b>	
Plastic	<b>A00</b>
Metal	<b>A01</b>
Stainless steel	<b>A02</b>
Stainless steel 316L/1.4404	<b>A03</b>
CMP, for XP devices	<b>A10</b>
CAPRI ADE 4F, CuZn, cable inner diameter 7 ... 12 mm, cable outer diameter 10 ... 16 mm	<b>A11</b>
CAPRI ADE 4F, stainless steel, cable inner diameter 7 ... 12 mm, cable outer diameter 10 ... 16 mm	<b>A12</b>
<b>Device plug Han mounted left</b>	
Device plug Han 7D (plastic, straight)	<b>A30</b>
Device plug Han 7D (plastic, angled)	<b>A31</b>
Device plug Han 7D (metal, straight)	<b>A32</b>
Device plug Han 7D (metal, angled)	<b>A33</b>
Device plug Han 8D (plastic, straight)	<b>A34</b>
Device plug Han 8D (plastic, angled)	<b>A35</b>
Device plug Han 8D (metal, straight)	<b>A36</b>
Device plug Han 8D (metal, angled)	<b>A37</b>
<b>Cable socket included</b>	
Plastic, for device plug Han 7D and Han 8D	<b>A40</b>
Metal, for device plug Han 7D and Han 8D	<b>A41</b>
<b>Device plug M12 mounted left</b>	
Stainless steel, without cable socket	<b>A62</b>
Stainless steel, with cable socket	<b>A63</b>
<b>Cable entry/connector mounting</b>	
2x sealing plugs M20 x 1.5, IP66/68 installed on both sides	<b>A90</b>
2x sealing plugs ½-14 NPT, IP66/68 installed on both sides	<b>A91</b>
Cable gland/connector mounted left	<b>A97</b>
Cable gland/connector mounted on right	<b>A99</b>
<b>Nameplate labeling (standard labeling: English, unit bar)</b>	
German (bar)	<b>B11</b>
French (bar)	<b>B12</b>
Spanish (bar)	<b>B13</b>
Italian (bar)	<b>B14</b>
Chinese (bar)	<b>B15</b>
Russian (bar)	<b>B16</b>
English (psi)	<b>B20</b>
English (Pa)	<b>B30</b>
Chinese (Pa)	<b>B35</b>
<b>Certificates</b>	
Quality test certificate, 5-point factory calibration (IEC 60770-2)	<b>C11</b>
Inspection certificate (EN 10204-3.1) - Material of pressurized and wetted parts	<b>C12</b>
Factory certificate - NACE (MR 0103-2012 and MR 0175-2009))	<b>C13</b>
Factory certificate (EN 10204-2.2) - Wetted parts	<b>C14</b>
Inspection certificate (EN 10204-3.1) - PMI test of pressurized and wetted parts	<b>C15</b>
<b>Certificates for functional safety</b>	
Functional safety (IEC 61508) - SIL2/3	<b>C20</b>

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Device options</b>	
PDF file with device settings	<b>D10</b>
Double layer coating (epoxy resin and polyurethane) 120 µm of enclosure and cover	<b>D20</b>
FVMQ enclosure sealing	<b>D21</b>
IP66/IP68 degree of protection (not for device plugs M12 and Han )	<b>D30</b>
TAG label empty	<b>D40</b>
Without labeling of the measuring range on the TAG label	<b>D41</b>
Stainless steel Ex plate 1.4404/316L	<b>D42</b>
Overvoltage protection up to 6 kV (external)	<b>D71</b>
Adhesive labels on transport packaging (supplied by customer)	<b>D90</b>
<b>General approval without Ex approval</b>	
Worldwide (CE, RCM) except EAC, FM, CSA, KCC	<b>E00</b>
Worldwide (CE, RCM, EAC, FM, CSA, KCC)	<b>E01</b>
CSA (USA and Canada)	<b>E06</b>
EAC	<b>E07</b>
FM	<b>E08</b>
KCC	<b>E09</b>
Export approval CPA (China)	<b>E12</b>
<b>Explosion protection approvals</b>	
ATEX (Europe)	<b>E20</b>
CSA (USA and Canada)	<b>E21</b>
FM (USA and Canada)	<b>E22</b>
IECEX (Worldwide)	<b>E23</b>
EACEx (GOST-R, -K, -B)	<b>E24</b>
INMETRO (Brazil)	<b>E25</b>
KCs (Korea)	<b>E26</b>
NEPSI (China)	<b>E27</b>
PESO (India)	<b>E28</b>
UKR Sepro (Ukraine)	<b>E30</b>
ATEX (Europe) and IECEX (Worldwide)	<b>E47</b>
CSA (Canada) and FM (USA)	<b>E48</b>
ATEX (Europe) and IECEX (Worldwide) + CSA (Canada) and FM (USA)	<b>E49</b>
<b>Marine approvals</b>	
DNV-GL (Det Norske Veritas/Germanischer Lloyd)	<b>E50</b>
LR (Lloyds Register)	<b>E51</b>
BV (Bureau Veritas)	<b>E52</b>
ABS (American Bureau of Shipping)	<b>E53</b>
RMR (Russian Maritime Register)	<b>E55</b>
KR (Korean Register of Shipping)	<b>E56</b>
RINA (Registro Italiano Navale)	<b>E57</b>
CCS (China Classification Society)	<b>E58</b>
<b>Country-specific approvals</b>	
CRN approval Canada (Canadian Registration Number)	<b>E60</b>
<b>Special approvals</b>	
Oxygen application (with inert liquid, max. 100 bar (1 450 psi) at 60° C (140 °F))	<b>E80</b>
Dual seal	<b>E81</b>
WRC / WRAS (drinking water); only with pressure cap O-rings made of EPDM	<b>E83</b>
NSF61 (drinking water)	<b>E84</b>
ACS (drinking water)	<b>E85</b>

# Pressure Measurement

## Pressure transmitters

for applications with advanced requirements (Advanced)

SITRANS P320/P420

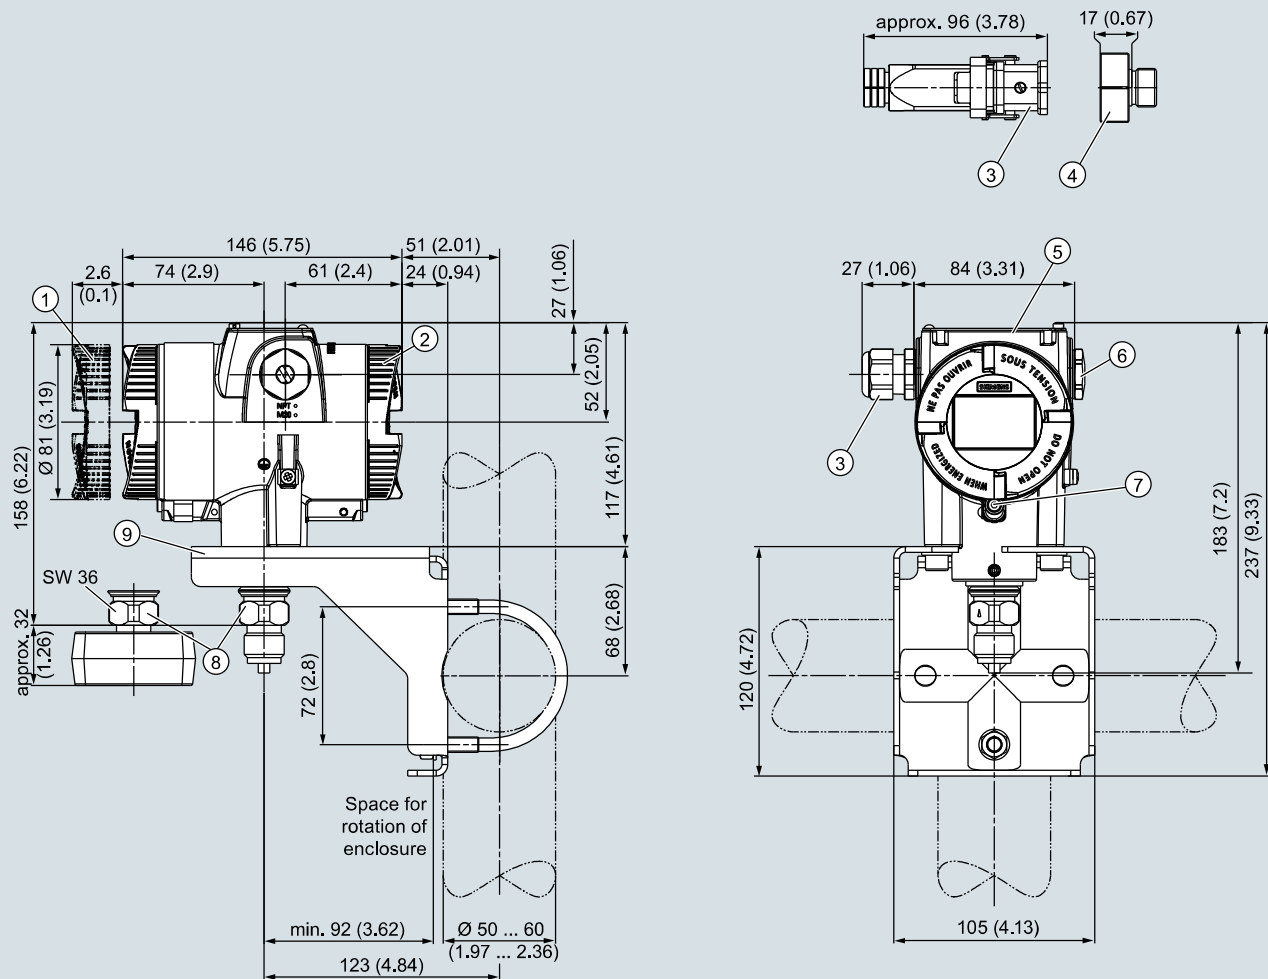
for gauge pressure (pressure series)

1

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Mounting bracket</b>	
Steel, galvanized	<b>H01</b>
Stainless steel 1.4301/304	<b>H02</b>
Stainless steel 1.4404/316L	<b>H03</b>
<b>Flange connections with flange EN 1092-1</b>	
With flange adapter G½ Form B1	
• DN 25 PN 40, stainless steel 1.4571/316Ti	<b>J80</b>
• DN 50 PN 40, stainless steel 1.4571/316Ti	<b>J81</b>
• DN 80 PN 40, stainless steel 1.4571/316Ti	<b>J82</b>
With siphon G½ Form B1	
• DN 25 PN 40, stainless steel 1.4571/316Ti	<b>J83</b>
• DN 50 PN 40, stainless steel 1.4571/316Ti	<b>J84</b>
• DN 80 PN 40, stainless steel 1.4571/316Ti	<b>J85</b>
• DN 25 PN 100, stainless steel 1.4571/316Ti	<b>J86</b>
<b>Process flanges, gaskets (instead of standard gaskets FKM (FPM))</b>	
Seal (EN 837-1) material Fe (soft iron)	<b>K60</b>
Seal (EN 837-1) material 1.4571	<b>K61</b>
Seal (EN 837-1) material Cu	<b>K62</b>
<b>Process connection</b>	
Process connection male thread G½, bore hole 11 mm	<b>K80</b>
<b>Shut-off valves, valve manifolds</b>	
With mounted valve manifold 7MF9011-4EA, process connection at transmitter G½ shank, PTFE sealing ring and pressure test certified in in factory certificate (EN 10204-2.2)	<b>T02</b>
With mounted valve manifold 7MF9011-4FA, process connection at transmitter female thread ½-14 NPT, sealing tape. With PTFE sealing ring and pressure test certified in factory certificate (EN 10204-2.2)	<b>T03</b>
With mounted valve manifold 7MF9411-5AA, process connection at transmitter oval flange with PTFE gasket, steel mounting screws, pressure test certified in factory certificate (EN 10204-2.2)	<b>T05</b>
With mounted valve manifold 7MF9411-5AA, process connection at transmitter oval flange with PTFE gasket, stainless steel mounting screws, pressure test certified in factory certificate (EN 10204-2.2)	<b>T06</b>

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Device settings</b>	
Measuring span Lower range value (max. 5 characters), upper range value (max. 5 characters), unit [mbar, bar, kPa, MPa, psi, ...], example: -0.5 ... 10.5 psi	<b>Y01</b>
Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).	
Drop-down list: Pa, MPa, kPa, hPa, bar, mbar, psi, g/cm², kg/cm², kgf/cm², inH₂O, inH₂O (4°C), ftH₂O, mmH₂O, mmH₂O (4°C), mH₂O (4°C), mmHg, inHg, atm, torr	
TAG (on stainless steel plate and device parameters, max. 32 characters)	<b>Y15</b>
Input field: Free text, max. 32 characters	
Measuring point description (on stainless steel plate and device parameters, max. 32 characters)	<b>Y16</b>
Input field: Free text, max. 32 characters	
TAG short (device parameters, max. 8 characters)	<b>Y17</b>
Input field: Free text, max. 8 characters	
Local display [Pressure, Percent], reference [None, Absolute, Relative], example: Pressure gauge	<b>Y21</b>
Drop-down list: Percent, pressure unit, pressure unit abs., pressure unit gauge	
Local display Scaling with standard units [m³/s, l/s, m, inch, ...], example 1 ... 5 m	<b>Y22</b>
Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).	
Drop-down list: m, cm, mm, in, ft, m³, l, hl, in³, ft³, yd³, gal, gal (UK), bu, bbl, bbl (US), SCF, Nm³, NI.	
Local display Scaling with user-specific units (max. 12 characters), example 1 ... 5 m	<b>Y23</b>
Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).	
Input field 3: Free text, max. 8 characters	
Saturation limits instead of 3.8 ... 20.5 mA, example: 3.8 ... 22.0 mA	<b>Y30</b>
Drop-down list 1: 3.9, 4	
Drop-down list 2: 20.8, 22	
Fault current instead of 3.6 mA [22.5 mA, 22.8 mA]	<b>Y31</b>
Drop-down list: 3.75; 21.75; 22.5; 22.6	
Damping in seconds instead of 2 s (0.0 ... 100.0 s)	<b>Y32</b>
Input field: max. 4 characters and numbers only; decimal places as dot (comma is automatically converted to dot); min. value = 0; max. value = 100.	
ID number of special version	<b>Y99</b>
Input field: max. 4 characters and only natural numbers from 0 ... 9999	

## Dimensional drawings



① Electronics side, local display  
(longer overall length for cover with glass pane)<sup>1)</sup>

② Connection side

③ Electrical connection:

- M20 x 1.5<sup>3)</sup> screw gland
- ½-14 NPT screw gland
- Han 7D/Han 8D<sup>2) 3)</sup> device plug
- M12 device plug<sup>2) 3)</sup>

④ Harting adapter

⑤ Cover over buttons and nameplate  
with general information

⑥ Blanking plug

⑦ Safety catch

(only for "flameproof enclosure" type of protection)

⑧ Process connection: G½B connection pin or oval flange

⑨ Mounting bracket (optional)

<sup>1)</sup> In addition, allow approx. 22 mm (0.87 inch) for the thread length when removing the covers

<sup>2)</sup> Not with "flameproof enclosure" type of protection

<sup>3)</sup> Not with type of protection "FM + CSA" [is + XP]

SITRANS P320/P420 pressure transmitter for gauge pressure (pressure series), dimensions in mm (inch)

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for gauge pressure (differential pressure series)

1

## Technical specifications

### SITRANS P320 / SITRANS P420 for gauge pressure (differential pressure series)

#### Input

Measured variable	Gauge pressure		
Measuring span (infinitely adjustable) or measuring range and maximum operating pressure (pursuant to Pressure Equipment Directive 2014/68/EU)	Measuring span	Max. permissible operating pressure MAWP (PS)	Maximum permissible test pressure
	1 ... 20 mbar	160 bar	240 bar
	0.1 ... 2 kPa	16 MPa	24 MPa
	0.4019 ... 8.037 inH <sub>2</sub> O	2320 psi	3481 psi
	1 ... 60 mbar	160 bar	240 bar
	0.1 ... 6 kPa	16 MPa	24 MPa
	0.4019 ... 24.11 inH <sub>2</sub> O	2320 psi	3481 psi
	2.5 ... 250 mbar	160 bar	240 bar
	0.2 ... 25 kPa	16 MPa	24 MPa
	1.005 ... 100.5 inH <sub>2</sub> O	2320 psi	3481 psi
	6 ... 600 mbar	160 bar	240 bar
	0.6 ... 60 kPa	16 MPa	24 MPa
	2.41 ... 241.1 inH <sub>2</sub> O	2320 psi	3481 psi
	16 ... 1600 mbar	160 bar	240 bar
	1.6 ... 160 kPa	16 MPa	24 MPa
	6.43 ... 643 inH <sub>2</sub> O	2320 psi	3481 psi
	50 ... 5000 mbar	160 bar	240 bar
	5 ... 500 kPa	16 MPa	24 MPa
	20.09 ... 2009 inH <sub>2</sub> O	2320 psi	3481 psi
	0.3 ... 30 bar	160 bar	240 bar
	0.03 ... 3 MPa	16 MPa	24 MPa
	4.35 ... 435 psi	2320 psi	3481 psi
	5 ... 100 bar	160 bar	240 bar
	0.5 ... 10 MPa	16 MPa	24 MPa
	76.9 ... 1450 psi	2320 psi	3481 psi
Measuring limits			
• Low measuring limit			
- Measuring cell with silicone oil filling	30 mbar a/3 kPa a/0.44 psi a		
- Measuring cell with inert oil	30 mbar a/3 kPa a/0.44 psi a		
- Measuring cell with FDA-compliant oil	100 mbar a/10 kPa a/1.45 psi a		
• Upper measuring limit	100% of the max. measuring span (for oxygen measurement max. 100 bar/10 MPa/ 1450 psi and 60 °C (140 °F) ambient temperature/temperature of medium)		
• Lower range value	Between the measuring limits (infinitely adjustable)		

#### Output

Output signal	<b>HART</b>		
• Low saturation limit (infinitely adjustable)	4 ... 20 mA		
• High saturation limit (infinitely adjustable)	3.55 mA, factory preset to 3.8 mA		
• Ripple (without HART communication)	22.8 mA, factory-set to 20.5 mA or optionally 22.0 mA		
	$I_{pp} \leq 0.5\%$ of max. output current		
Adjustable damping	0 ... 100 s, continuously adjustable over remote operation		
	0 ... 100 s, in increments of 0.1 s, adjustable over display		
• Current transmitter	3.55 ... 22.8 mA		
• Failure signal	3.55 ... 22.8 mA		
Load	Resistor R [ $\Omega$ ]		
• Without HART communication	$R = (U_H - 10.5 \text{ V})/22.8 \text{ mA}$ , $U_H$ : Power supply in V		
• With HART communication	$R = 230 \dots 1100 \Omega$ (HART communicator (handheld)) $R = 230 \dots 500 \Omega$ (SIMATIC PDM)		
Characteristic curve	<ul style="list-style-type: none"> <li>Linearly increasing or linearly decreasing</li> <li>Linear increase or decrease or according to the square root (only for differential pressure and flow)</li> </ul>		
Physical bus	-		
Polarity-independent	-		

**SITRANS P320 / SITRANS P420 for gauge pressure (differential pressure series)****Measuring accuracy**

Reference conditions

- According to EN 60770-1
- Rising characteristic curve
- Lower range value 0 bar/kPa/psi
- Seal diaphragm stainless steel
- Measuring cell with silicone oil filling
- Room temperature 25 °C (77 °F)

Conformity error at limit point setting, including hysteresis and repeatability

Measuring span ratio  $r$  (spread, Turn-Down)

- Linear characteristic

- 20 mbar/2 kPa/8.031 inH<sub>2</sub>O- 60 mbar/6 kPa/24.09 inH<sub>2</sub>O

- 250 mbar/25 kPa/3.6 psi
- 600 mbar/60 kPa/240.9 inH<sub>2</sub>O
- 1600 mbar/160 kPa/642.4 inH<sub>2</sub>O
- 5000 mbar/500 kPa/2008 inH<sub>2</sub>O
- 30 bar/3 MPa/435 psi
- 100 bar/10 MPa/1450 psi

 $r = \text{max. measuring span/set measuring span and nominal measuring range}$ 

$r \leq 5$ :	$\leq 0.075\%$
$5 < r \leq 20$ :	$\leq (0.005 \cdot r + 0.05)\%$
$r \leq 5$ :	$\leq 0.075\%$
$5 < r \leq 60$ :	$\leq (0.005 \cdot r + 0.05)\%$
$r \leq 5$ :	$\leq 0.065\%$ (SITRANS P320)
	$\leq 0.04\%$ (SITRANS P420)
$5 < r \leq 100$ :	$\leq (0.004 \cdot r + 0.045)\%$
$r < 10$ :	$= 0.1\%$
$10 < r < 30$ :	$= 0.2\%$

Influence of ambient temperature as % per 28 °C (50 °F)

- 20 mbar/2 kPa/8.031 inH<sub>2</sub>O
- 60 mbar/6 kPa/24.09 inH<sub>2</sub>O
- 250 mbar/25 kPa/3.6 psi
- 600 mbar/60 kPa/240.9 inH<sub>2</sub>O
- 1600 mbar/160 kPa/642.4 inH<sub>2</sub>O
- 5000 mbar/500 kPa/2008 inH<sub>2</sub>O
- 30 bar/3 MPa/435 psi
- 250 mbar/25 kPa/3.6 psi
- 5000 mbar/500 kPa/2008 inH<sub>2</sub>O
- 600 mbar/60 kPa/240.9 inH<sub>2</sub>O
- 1600 mbar/160 kPa/642.4 inH<sub>2</sub>O
- 30 bar/3 MPa/435 psi
- 100 bar/10 MPa/1450 psi

$\leq (0.15 \cdot r + 0.1)\%$   
 $\leq (0.075 \cdot r + 0.1)\%$   
 $\leq (0.025 \cdot r + 0.125)\%$  (SITRANS P320)

$\leq (0.025 \cdot r + 0.0625)\%$  (SITRANS P420)  
 $\leq (0.0125 \cdot r + 0.0625)\%$  (SITRANS P420)

 $0.08 \cdot r + 0.16\%$ Long-term stability at  $\pm 30$  °C ( $\pm 54$  °F)

- 20 mbar/2 kPa/8.031 inH<sub>2</sub>O
- 60 mbar/6 kPa/24.09 inH<sub>2</sub>O
- 250 mbar/25 kPa/3.6 psi
- 600 mbar/60 kPa/240.9 inH<sub>2</sub>O
- 1600 mbar/160 kPa/642.4 inH<sub>2</sub>O
- 5000 mbar/500 kPa/2008 inH<sub>2</sub>O
- 30 bar/3 MPa/435 psi
- 100 bar/10 MPa/1450 psi

$\leq (0.2 \cdot r)\%$  per year  
 In 5 years  $\leq (0.25 \cdot r)\%$   
 In 5 years  $\leq (0.125 \cdot r)\%$   
 In 10 years  $\leq (0.15 \cdot r)\%$

In 5 years  $\leq (0.25 \cdot r)\%$   
 In 10 years  $\leq (0.35 \cdot r)\%$   
 In 5 years  $\leq (0.25 \cdot r)\%$

Step response time  $T_{63}$  (without electrical damping)

- 20 mbar/2 kPa/8.031 inH<sub>2</sub>O
- 60 mbar/6 kPa/24.09 inH<sub>2</sub>O
- 250 mbar/25 kPa/3.6 psi
- 600 mbar/60 kPa/240.9 inH<sub>2</sub>O
- 1600 mbar/160 kPa/642.4 inH<sub>2</sub>O
- 5000 mbar/500 kPa/2008 inH<sub>2</sub>O
- 30 bar/3 MPa/435 psi
- 100 bar/10 MPa/1450 psi

Approx. 0.160 s  
 Approx. 0.150 s  
 Approx. 0.135 s

Approx. 0.145 s

Effect of mounting position (in pressure per change of angle)

$\leq 0.7$  mbar/0.07 kPa/0.010 psi per 10° incline  
 (zero offset is possible with position error compensation)

Effect of auxiliary power (in % per voltage change)

 $0.005\%$  per 1 V**Operating conditions**

Temperature of medium

- Measuring cell with silicone oil filling
  - Measuring cell 30 bar (435 psi)
  - Measuring cell 100 bar (1450 psi)
- Measuring cell with inert oil
- In conjunction with dust explosion protection

-40 ... +100 °C (-40 ... +212 °F)  
 -20 ... +100 °C (-4 ... +212 °F)  
 -20 ... +100 °C (-4 ... +212 °F)  
 -20 ... +100 °C (-4 ... +212 °F)  
 -40 ... +85 °C (-4 ... +185 °F)

Ambient conditions

- Ambient temperature/enclosure
  - Measuring cell with silicone oil filling
  - Measuring cell with inert oil
  - Display
- Storage temperature
- Climatic class in accordance with IEC 60721-3-4
- Degree of protection
  - According to IEC 60529
  - According to NEMA 250
- Electromagnetic compatibility
  - Emitted interference and interference immunity

Observe the temperature class in areas subject to explosion hazard.  
 -40 ... +85 °C (-40 ... +185 °F)  
 -40 ... +85 °C (-40 ... +185 °F)  
 -20 ... +80 °C (-4 ... +176 °F)  
 -50 ... +85 °C (-58 ... +185 °F)  
 4K4H

IP66, IP68  
 Type 4X

According to IEC 61326 and NAMUR NE 21

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for gauge pressure (differential pressure series)

1

## SITRANS P320 / SITRANS P420 for gauge pressure (differential pressure series)

### Design

Weight	Approx. 3.9 kg (8.5 lb) with aluminum enclosure Approx. 5.8 kg (12.7 lb) with stainless steel enclosure
Material	
<ul style="list-style-type: none"> <li>Wetted parts materials           <ul style="list-style-type: none"> <li>Seal diaphragm</li> <li>Process flanges and sealing plugs</li> <li>O-ring</li> </ul> </li> <li>Non-wetted parts materials           <ul style="list-style-type: none"> <li>Electronics enclosure</li> <li>Pressure flange screws</li> <li>Mounting bracket</li> </ul> </li> </ul>	Stainless steel, mat. no. 1.4404/316L, Alloy C276, mat. no. 2.4819, Monel, mat. no. 2.4360, tantalum or gold Stainless steel, mat. no. 1.4408 to PN 160, mat. no. 1.4571/316Ti for PN 420, Alloy C22, 2.4602 or Monel, mat. no. 2.4360 FPM (Viton) or optionally: PTFE, FEP, FEPM and NBR Low-copper die-cast aluminum GD-AISI 12 or stainless steel precision casting, mat. no. 1.4409/ CF-3M Standard: Powder coating with polyurethane Option: 2 coats: Coat 1: epoxy-based; coat 2: Polyurethane Stainless steel type plate (1.4404/316L) Stainless steel ISO 3506-1 A4-70 Steel, electrogalvanized steel, or stainless steel
Process connection	1/4-18 NPT female thread and flat connection with 7/16-20 UNF fastening screw thread in accordance with EN 61518 or M10 fastening screw thread in accordance with DIN 19213 (M12 for PN 420 (MWP 6092 psi))
Electrical connection	Screw terminals Cable entry via the following screwed glands: <ul style="list-style-type: none"> <li>M20 x 1.5</li> <li>1/2-14 NPT</li> <li>Device plug Han 7D/Han 8D<sup>1)</sup></li> <li>Device plug M12</li> </ul>

### Displays and controls

Keys	4 keys for operation directly on the device
Display	<ul style="list-style-type: none"> <li>With or without integrated display (optional)</li> <li>Cover with inspection window (optional)</li> </ul>

### Auxiliary power $U_H$

Terminal voltage on pressure transmitter	10.5 ... 45 V DC 10.5 ... 30 V DC in intrinsically safe mode
Ripple	$U_{SS} \leq 0.2 \text{ V}$ (47 ... 125 Hz)
Noise	$U_{eff} \leq 1.2 \text{ mV}$ (0.5 ... 10 kHz)
Auxiliary power	–
Separate supply voltage	–

### Certificates and approvals

Classification according to pressure equipment directive (PED 2014/68/EU)	For gases of fluid group 1 and liquids of fluid group 1; complies with requirements of article 4, paragraph 3 (sound engineering practice)
Drinking water	
<ul style="list-style-type: none"> <li>WRAS (England)</li> <li>ACS (France)</li> <li>NSF (USA)</li> </ul>	No.: 1903094 (option E83) No.: 18 ACC LY 277 (option E85) No.: 20180920-MH61350 (option E84)
CRN (Canada)	No.: 0F9863.5C (option E60)
Explosion protection acc. to NEPSI (China)	No.: GYJ19.1058X (option E27)
Explosion protection acc. to INMETRO (Brazil)	No.: BRA-18-GE-0035X (option E25)
Explosion protection	
<ul style="list-style-type: none"> <li>Intrinsic safety "i"           <ul style="list-style-type: none"> <li>Marking</li> <li>Permissible ambient temperature</li> <li>Permissible temperature of measuring medium</li> <li>Connection</li> </ul> </li> <li>Effective internal inductance/capacitance</li> <li>Flameproof enclosure "d"           <ul style="list-style-type: none"> <li>Marking</li> <li>Permissible ambient temperature</li> <li>Permissible temperature of measuring medium</li> <li>Connection</li> </ul> </li> </ul>	II 1/2 G Ex ia/ib IIC T4/T6 Ga/Gb -40 ... +80 °C (-40 ... +176 °F) temperature class T4 -40 ... +70 °C (-40 ... +158 °F) temperature class T6 -40 ... +100 °C (-40 ... +212 °F) temperature class T4 -40 ... +70 °C (-40 ... +158 °F) temperature class T6 To certified intrinsically safe circuits with the peak values: $U_i = 30 \text{ V}$ , $I_i = 101 \text{ mA}$ , $P_i = 760 \text{ mW}$ $U_i = 29 \text{ V}$ , $I_i = 110 \text{ mA}$ , $P_i = 800 \text{ mW}$ $L_i = 0.24 \text{ } \mu\text{H}/C_i = 3.29 \text{ nF}$ Ex II 1/2 G Ex ia/db IIC T4/T6 Ga/Gb -40 ... +80 °C (-40 ... +176 °F) temperature class T4 -40 ... +70 °C (-40 ... +158 °F) temperature class T6 -40 ... +100 °C (-40 ... +212 °F) temperature class T4 -40 ... +70 °C (-40 ... +158 °F) temperature class T6 To a circuit with the operating values: $U_n = 10.5 \text{ to } 45 \text{ V}$ , $4 \text{ ... } 20 \text{ mA}$

**SITRANS P320 / SITRANS P420 for gauge pressure (differential pressure series)**

<ul style="list-style-type: none"> <li>• Dust explosion protection for zones 21, 22               <ul style="list-style-type: none"> <li>- Marking</li> <li>- Permissible ambient temperature</li> <li>- Permissible temperature of measuring medium</li> <li>- Max. surface temperature</li> <li>- Connection</li> </ul> </li> <li>• Dust explosion protection for zones 20, 21, 22               <ul style="list-style-type: none"> <li>- Marking</li> <li>- Permissible ambient temperature</li> <li>- Permissible temperature of measuring medium</li> <li>- Connection</li> </ul> </li> <li>- Effective internal inductance/capacitance</li> <li>• Type of protection for Zone 2               <ul style="list-style-type: none"> <li>- Marking</li> <li>- Permissible ambient temperature "ec"</li> <li>- Permissible temperature of measuring medium</li> <li>- "ec" connection</li> </ul> </li> <li>• Explosion protection acc. to FM               <ul style="list-style-type: none"> <li>- Marking (XP/DIP) or IS; NI; S</li> </ul> </li> <li>• Explosion protection according to CSA               <ul style="list-style-type: none"> <li>- Marking (XP/DIP) or (IS)</li> </ul> </li> </ul>	<p>Ex II 2D Ex tb IIIC T120 °C Db Ex II 3D Ex tc IIIC T120 °C Dc -40 ... +80 °C (-40 ... +176 °F) -40 ... +100 °C (-40 ... +212 °F) 120 °C (248 °F) To a circuit with the operating values: <math>U_n = 10.5</math> to 45 V, 4 ... 20 mA</p> <p>Ex II 1D Ex ia IIIC T120 °C Da Ex II 2D Ex ib IIIC T120 °C Db -40 ... +80 °C (-40 ... +176 °F) -40 ... +100 °C (-40 ... +212 °F) To certified intrinsically safe circuits with the peak values: <math>U_i = 30</math> V, <math>I_i = 101</math> mA, <math>P_i = 760</math> mW <math>U_i = 29</math> V, <math>I_i = 110</math> mA, <math>P_i = 800</math> mW <math>L_i = 0.24</math> µH/<math>C_i = 3.29</math> nF</p> <p>Ex II 3G Ex ec IIC T4/T6 Gc -40 ... +80 °C (-40 ... +176 °F) temperature class T4 -40 ... +40 °C (-40 ... +104 °F) temperature class T6 -40 ... +100 °C (-40 ... +212 °F) temperature class T4 -40 ... +70 °C (-40 ... +158 °F) temperature class T6 To a circuit with the operating values: <math>U_n = 10.5</math> to 30 V, 4 ... 20 mA</p> <p>Available soon CL I, DIV 1, GP ABCD T4 ... T6; CL II, DIV 1, GP EFG; CL III; Ex ia IIC T4 ... T6: CL I, DIV 2, GP ABCD T4 ... T6; CL II, DIV 2, GP FG; CL III</p> <p>Available soon CL I, DIV 1, GP ABCD T4 ... T6; CL II, DIV 1, GP EFG; CL III; Ex ia IIC T4 ... T6: CL I, DIV 2, GP ABCD T4 ... T6; CL II, DIV 2, GP FG; CL III</p>
NAMUR recommendations	
<ul style="list-style-type: none"> <li>• NE 06</li> <li>• NE 21</li> <li>• NE 23</li> <li>• NE 43</li> <li>• NE 53</li> <li>• NE 80</li> <li>• NE 105</li> <li>• NE 107</li> <li>• NE 131</li> </ul>	<p>Standardized Electrical Signals and Questions Relating to Engineering Technology Electromagnetic Compatibility (EMC) of Industrial Process and Laboratory Control Equipment Extra Low Voltage Circuits with Safe Separation Standardization of the Signal Level for the Failure Information of Digital Transmitters Software and Hardware of Field Devices and Signal Processing Devices with Digital Electronics The Application of the Pressure Equipment Directive to Process Control Devices Specifications for Integrating Fieldbus Devices in Engineering Tools for Field Devices Self-Monitoring and Diagnosis of Field Devices NAMUR Standard Device - Field Devices for Standard Applications</p>

1) Han 8D is identical to Han 8U.

**HART communication**

HART	230 ... 1100 Ω
Protocol	HART 7
Software for computer	SIMATIC PDM



# Pressure Measurement

## Pressure transmitters

for applications with advanced requirements (Advanced)

SITRANS P320/P420

for gauge pressure (differential pressure series)

1

### Selection and ordering data

	Article No.
<b>Pressure transmitters for gauge pressure (differential pressure series)</b>	
<b>SITRANS P320</b>	➤ 7MF031 - - - - -
<b>SITRANS P420</b>	➤ 7MF041 - - - - -
➤ Click on the Article no. for the online configuration in the PIA Life Cycle Portal.	
<b>Communication</b>	
HART, 4 ... 20 mA	0
<b>Measuring cell filling</b>	
Silicone oil	1
Inert filling liquid	3
<b>Maximum measuring span</b>	
20 mbar (8.037 inH <sub>2</sub> O)	B
60 mbar (24.11 inH <sub>2</sub> O)	D
250 mbar (1005 inH <sub>2</sub> O)	G
600 mbar (241.1 inH <sub>2</sub> O)	H
1 600 mbar (643 inH <sub>2</sub> O)	M
5000 mbar (2009 inH <sub>2</sub> O)	P
30 bar (435 psi)	R
<b>Process connection</b>	
Oval flange, mounting thread: $\frac{7}{16}$ -20 UNF (IEC 61518)	L
Oval flange, mounting thread: M10 (PN 160), (DIN 19213)	M
Oval flange, mounting thread: $\frac{7}{16}$ -20 UNF (IEC 61518) with lateral ventilation	N
Oval flange, mounting thread: M10 (PN 160) (DIN 19213) with lateral ventilation	P
<b>Wetted parts materials: Process connection, seal diaphragm</b>	
Stainless steel 316L/1.4404, stainless steel 316L/1.4404, process flange stainless steel 316/1.4408	0
Stainless steel 316L/1.4404, alloy C276/2.4819, process flange stainless steel 316/1.4408	1
Alloy C22/2.4602, alloy C276/2.4819, process flange stainless steel 316/1.4408	2
Tantalum/tantalum, process flange stainless steel 316/1.4408 (not in combination with maximum measuring span 20 mbar (0.29 psi) and 60 mbar (0.87 psi))	4
Monel 00/2.4360, Monel 400/2.4360, process flange stainless steel 316/1.4408 (not in combination with maximum measuring span 20 mbar (0.29 psi) and 60 mbar (0.87 psi))	6
Stainless steel 316L/1.4404, gold-plated, process flange stainless steel 316/1.4408 (not in combination with maximum measuring span 20 mbar (0.29 psi) and 60 mbar (0.87 psi))	8
<b>Non-wetted parts materials</b>	
Die-cast aluminum	1
Stainless steel precision casting CF3M/1.4409 similar to 316L	2
<b>Enclosure</b>	
Dual chamber device	5
<b>Type of protection</b>	
Without Ex	A
Intrinsic safety	B
Flameproof enclosure	C
Flameproof enclosure, intrinsic safety	D
Dust protection by enclosure Zone 21/22 (DIP), increased safety Zone 2	L
Dust protection by enclosure Zone 20/21/22 (DIP), increased safety Zone 2	M
Combination of options B, C and L (zone model)	S
Combination of options B, C and M (zone model, Class Division)	T
<b>Electrical connections/cable entries</b>	
Thread for cable gland: Cable gland must be ordered separately as option (Axx)	
• 2 x M20 x 1.5	F
• 2 x ½-14 NPT	M
<b>Local operation/display</b>	
Without display (cover closed)	0
With display (cover closed)	1
With display (cover with glass pane)	2

## Selection and ordering data

Options	Order code	Options	Order code
Append "-Z" to Article No., add order code and plain text or entry from drop-down list.		Append "-Z" to Article No., add order code and plain text or entry from drop-down list.	
<b>Cable glands included</b>		<b>Device options</b>	
Plastic	A00	PDF file with device settings	D10
Metal	A01	Double layer coating (epoxy resin and polyurethane) 120 µm of enclosure and cover	D20
Stainless steel	A02	FVMQ enclosure sealing	D21
Stainless steel 316L/1.4404	A03	IP66/IP68 degree of protection (not for device plugs M12 and Han )	D30
CMP, for XP devices	A10	TAG label empty	D40
CAPRI ADE 4F, CuZn, cable inner diameter 7 ... 12 mm, cable outer diameter 10 ... 16 mm	A11	Without labeling of the measuring range on the TAG label	D41
CAPRI ADE 4F, stainless steel, cable inner diameter 7 ... 12 mm, cable outer diameter 10 ... 16 mm	A12	Stainless steel Ex plate 1.4404/316L	D42
<b>Device plug Han mounted left</b>		Overvoltage protection up to 6 kV (external)	D71
Device plug Han 7D (plastic, straight)	A30	Adhesive labels on transport packaging (supplied by customer)	D90
Device plug Han 7D (plastic, angled)	A31		
Device plug Han 7D (metal, straight)	A32	<b>General approval without Ex approval</b>	
Device plug Han 7D (metal, angled)	A33	Worldwide (CE, RCM) except EAC, FM, CSA, KCC	E00
Device plug Han 8D (plastic, straight)	A34	Worldwide (CE, RCM, EAC, FM, CSA, KCC)	E01
Device plug Han 8D (plastic, angled)	A35	CSA (USA and Canada)	E06
Device plug Han 8D (metal, straight)	A36	EAC	E07
Device plug Han 8D (metal, angled)	A37	FM	E08
<b>Cable socket included</b>		KCC	E09
Plastic, for device plug Han 7D and Han 8D	A40	Export approval CPA (China)	E12
Metal, for device plug Han 7D and Han 8D	A41	<b>Explosion protection approvals</b>	
<b>Device plug M12 mounted left</b>		ATEX (Europe)	E20
Stainless steel, without cable socket	A62	CSA (USA and Canada)	E21
Stainless steel, with cable socket	A63	FM (USA and Canada)	E22
<b>Cable entry/connector mounting</b>		IECEx (Worldwide)	E23
2x sealing plugs M20 x 1.5, IP66/68 installed on both sides	A90	EACEx (GOST-R, -K, -B)	E24
2x sealing plugs ½-14 NPT, IP66/68 installed on both sides	A91	INMETRO (Brazil)	E25
Cable gland/connector mounted left	A97	KCs (Korea)	E26
Cable gland/connector mounted on right	A99	NEPSI (China)	E27
<b>Nameplate labeling (standard labeling: English, unit bar)</b>		PESO (India)	E28
German (bar)	B11	UKR Sepro (Ukraine)	E30
French (bar)	B12	ATEX (Europe) and IECEx (Worldwide)	E47
Spanish (bar)	B13	CSA (Canada) and FM (USA)	E48
Italian (bar)	B14	ATEX (Europe) and IECEx (Worldwide) + CSA (Canada) and FM (USA)	E49
Chinese (bar)	B15	<b>Marine approvals</b>	
Russian (bar)	B16	DNV-GL (Det Norske Veritas/Germanischer Lloyd)	E50
English (psi)	B20	LR (Lloyds Register)	E51
English (Pa)	B30	BV (Bureau Veritas)	E52
Chinese (Pa)	B35	ABS (American Bureau of Shipping)	E53
<b>Certificates</b>		RMR (Russian Maritime Register)	E55
Quality test certificate, 5-point factory calibration (IEC 60770-2)	C11	KR (Korean Register of Shipping)	E56
Inspection certificate (EN 10204-3.1) - Material of pressurized and wetted parts	C12	RINA (Registro Italiano Navale)	E57
Factory certificate - NACE (MR 0103-2012 and MR 0175-2009))	C13	CCS (China Classification Society)	E58
Factory certificate (EN 10204-2.2) - Wetted parts	C14	<b>Country-specific approvals</b>	
Inspection certificate (EN 10204-3.1) - PMI test of pressurized and wetted parts	C15	CRN approval Canada (Canadian Registration Number)	E60
<b>Certificates for functional safety</b>			
Functional safety (IEC 61508) - SIL2/3	C20		

# Pressure Measurement

## Pressure transmitters

for applications with advanced requirements (Advanced)

SITRANS P320/P420

for gauge pressure (differential pressure series)

1

Options	Order code
Append "-Z" to Article No., add order code and plain text or entry from drop-down list.	
<b>Special approvals</b>	
Oxygen application (with inert liquid, max. 100 bar (1 450 psi) at 60° C (140 °F))	<b>E80</b>
Dual seal	<b>E81</b>
WRC / WRAS (drinking water); only with pressure cap O-rings made of EPDM	<b>E83</b>
NSF61 (drinking water)	<b>E84</b>
ACS (drinking water)	<b>E85</b>
<b>Mounting bracket</b>	
Steel, galvanized	<b>H01</b>
Stainless steel 1.4301/304	<b>H02</b>
Stainless steel 1.4404/316L	<b>H03</b>
<b>Process flanges; screw plug with vent valve</b>	
Welded in on right	<b>J08</b>
Welded in on left	<b>J09</b>
Glued in on right	<b>J10</b>
Glued in on left	<b>J11</b>
<b>Flange connections with flange EN 1092-1</b>	
Form B1	
• DN 25 PN 40, stainless steel 1.4571/316Ti	<b>J70</b>
• DN 50 PN 40, stainless steel 1.4571/316Ti	<b>J71</b>
• DN 80 PN 40, stainless steel 1.4571/316Ti	<b>J72</b>
• DN 15 PN 40, stainless steel 1.4571/316Ti	<b>J78</b>
Form C	
• DN 25 PN 40, stainless steel 1.4571/316Ti	<b>J73</b>
• DN 50 PN 40, stainless steel 1.4571/316Ti	<b>J74</b>
• DN 80 PN 40, stainless steel 1.4571/316Ti	<b>J75</b>
<b>Flange connection options</b>	
Flange connection and temperature extension	<b>J76</b>
Flange connection with epoxy resin coating	<b>J77</b>
<b>Process flanges; special materials</b>	
Reserved for 7MF7: without process flanges, without screws, without gaskets	<b>K00</b>
Process flange material alloy C22/2.4602	<b>K01</b>
Process flange material Monel 400/2.4360	<b>K02</b>
Process connection material PVDF, on the side ½-14 NPT	<b>K05</b>
Process flanges/process connection material PVDF, flange on the side EN 1092-1 Form B1 DN 25 PN 40, MAWP 4 bar	<b>K06</b>
Process flanges/process connection material PVDF, flange on the side EN 1092-1 Form B1 DN 40 PN 40, MAWP 4 bar	<b>K07</b>
<b>Process flanges; process connection option</b>	
Process flange with process connection G½ welded on	<b>K20</b>
Process connection NAM (ASTAVA)	<b>K21</b>
<b>Process flanges chambered with gaskets</b>	
1x chambered, graphite	<b>K40</b>
1x chambered, PTFE	<b>K41</b>
2x chambered, PTFE	<b>K42</b>
<b>Process flanges, gaskets (instead of standard gaskets FKM (FPM))</b>	
O-ring, process flanges, PTFE	<b>K50</b>
O-ring, process flanges, FEP (with silicone core, approved for food)	<b>K51</b>
O-ring, process flanges, FFKM (FFPM)	<b>K52</b>
O-ring, process flanges, NBR	<b>K53</b>
O-ring, process flanges, EPDM	<b>K54</b>

Options	Order code
Append "-Z" to Article No., add order code and plain text or entry from drop-down list.	
<b>Process flange options</b>	
Process flanges for vertical differential pressure lines (half process flange)	<b>K81</b>
Process flanges (+) - side front	<b>K82</b>
Process flange screws, process flange nuts, material Monel 400/2.4360	<b>K83</b>
Valve ¼-18 NPT, material same as process flanges	<b>K84</b>
Valve mounted on the side, measured medium: Gas	<b>K85</b>
Oval flange enclosed, gasket PTFE + mounting screws	<b>K86</b>
<b>Valve manifolds</b>	
With mounted valve manifold (3-way) 7MF9411-5BA, PTFE sealing rings, chrome-plated steel screws and pressure test certified in factory certificate (EN 10204-2.2)	<b>U01</b>
With mounted valve manifold (3-way) 7MF9411-5BA, PTFE sealing rings, stainless steel screws and pressure test certified in factory certificate (EN 10204-2.2)	<b>U02</b>
With mounted valve manifold (5-way) 7MF9411-5CA, PTFE sealing rings, chrome-plated steel screws and pressure test certified in factory certificate (EN 10204-2.2)	<b>U03</b>
With mounted valve manifold (5-way) 7MF9411-5CA, PTFE sealing rings, stainless steel screws and pressure test certified in factory certificate (EN 10204-2.2)	<b>U04</b>

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Device settings</b>	
<p>Measuring span</p> <p>Lower range value (max. 5 characters), upper range value (max. 5 characters), unit [mbar, bar, kPa, MPa, psi, ...], example: -0.5 ... 10.5 psi</p> <p>Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).</p> <p>Drop-down list: Pa, MPa, kPa, hPa, bar, mbar, psi, g/cm<sup>2</sup>, kg/cm<sup>2</sup>, kgf/cm<sup>2</sup>, inH<sub>2</sub>O, inH<sub>2</sub>O (4°C), ftH<sub>2</sub>O, mmH<sub>2</sub>O, mmH<sub>2</sub>O (4°C), mH<sub>2</sub>O (4°C), mmHg, inHg, atm, torr</p>	<b>Y01</b>
<p>TAG (on stainless steel plate and device parameters, max. 32 characters)</p> <p>Input field: Free text, max. 32 characters</p>	<b>Y15</b>
<p>Measuring point description (on stainless steel plate and device parameters, max. 32 characters)</p> <p>Input field: Free text, max. 32 characters</p>	<b>Y16</b>
<p>TAG short (device parameters, max. 8 characters)</p> <p>Input field: Free text, max. 8 characters</p>	<b>Y17</b>
<p>Local display [Pressure, Percent], reference [None, Absolute, Relative], example: Pressure gauge</p> <p>Drop-down list: Percent, pressure unit, pressure unit abs., pressure unit gauge</p>	<b>Y21</b>
<p>Local display Scaling with standard units [m<sup>3</sup>/s, l/s, m, inch, ...], example 1 ... 5 m</p> <p>Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).</p> <p>Drop-down list: m, cm, mm, in, ft, m<sup>3</sup>, l, hl, in<sup>3</sup>, ft<sup>3</sup>, yd<sup>3</sup>, gal, gal (UK), bu, bbl, bbl (US), SCF, Nm<sup>3</sup>, NI.</p>	<b>Y22</b>
<p>Local display Scaling with user-specific units (max. 12 characters), example 1 ... 5 m</p> <p>Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).</p> <p>Input field 3: Free text, max. 8 characters</p>	<b>Y23</b>
<p>Saturation limits instead of 3.8 ... 20.5 mA, example: 3.8 ... 22.0 mA</p> <p>Drop-down list 1: 3.9, 4</p> <p>Drop-down list 2: 20.8, 22</p>	<b>Y30</b>
<p>Fault current instead of 3.6 mA [22.5 mA, 22.8 mA]</p> <p>Drop-down list: 3.75; 21.75; 22.5; 22.6</p>	<b>Y31</b>
<p>Damping in seconds instead of 2 s (0.0 ... 100.0 s)</p> <p>Input field: max. 4 characters and numbers only; decimal places as dot (comma is automatically converted to dot); min. value = 0; max. value = 100.</p>	<b>Y32</b>
<p>ID number of special version</p> <p>Input field: max. 4 characters and only natural numbers from 0 ... 9999</p>	<b>Y99</b>

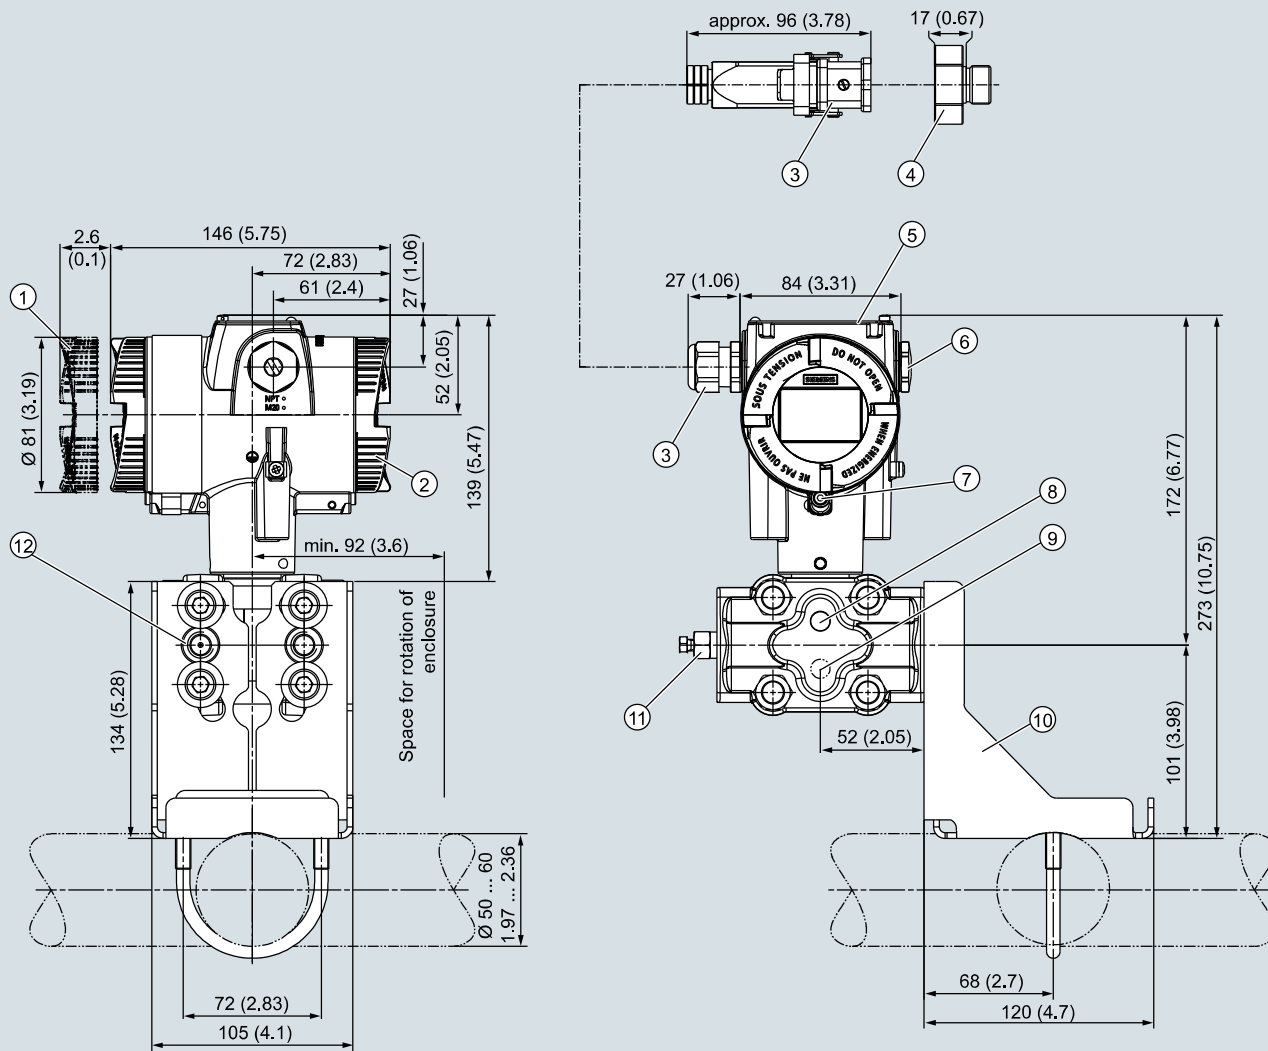
# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for gauge pressure (differential pressure series)

1

## Dimensional drawings



① Electronics side, local display  
(longer overall length for cover with glass pane)<sup>1)</sup>

② Connection side

③ Electrical connection:  
• M20 x 1,5<sup>3)</sup> screw gland  
• ½-14 NPT screw gland  
• Han 7D/Han 8D<sup>2) 3)</sup> device plug  
• M12 device plug<sup>2) 3)</sup>

④ Harting adapter

⑤ Cover over buttons and nameplate with general information

⑥ Blanking plug

⑦ Safety catch  
(only for "flameproof enclosure" type of protection)

⑧ Lateral ventilation for liquid measurement (Standard)

⑨ Lateral ventilation for gas measurement (order option K85)

⑩ Mounting bracket (optional)

⑪ Sealing plug with valve (optional)

⑫ Process connection: ¼-18 NPT (IEC 61518)

<sup>1)</sup> In addition, allow approx. 22 mm (0.87 inch) for the thread length when removing the covers

<sup>2)</sup> Not with "flameproof enclosure" type of protection

<sup>3)</sup> Not with type of protection "FM + CSA" [is + XP]"

SITRANS P320/P420 pressure transmitter for relative pressure (differential pressure series), dimensions in mm (inch)

## Technical specifications

## SITRANS P320 / SITRANS P420 for gauge and absolute pressure, with flush-mounted diaphragm

## Input of gauge pressure, with flush-mounted diaphragm

Measured variable

Gauge pressure

Measuring span (infinitely adjustable) or measuring range, max. operating pressure and max. test pressure

Measuring span

Max. permissible operating pressure MAWP (PS)      Maximum permissible test pressure

Refer to the information on the nameplate of the pressure transmitter and the data on the mounting flange<sup>1)</sup>

0.01 ... 1 bar

1 ... 100 kPa

0.15 ... 14.5 psi

0.04 ... 4 bar

4 ... 400 kPa

0.58 ... 58 psi

0.16 ... 16 bar

0.016 ... 1.6 MPa

2.3 ... 232 psi

0.6 ... 63 bar

0.063 ... 6.3 MPa

9.1 ... 914 psi

Measuring limits

- Low measuring limit
  - Measuring cell with silicone oil filling
  - Measuring cell with inert oil
  - Measuring cell with FDA-compliant oil
- Upper measuring limit

100 mbar a/10 kPa a/1.45 psi a

100 mbar a/10 kPa a/1.45 psi a

100 mbar a/10 kPa a/1.45 psi a

100% of max. measuring span

## Input of absolute pressure, with flush-mounted diaphragm

Measured variable

Absolute pressure

Measuring span (infinitely adjustable) or measuring range, max. operating pressure and max. test pressure

Measuring span

Max. permissible operating pressure MAWP (PS)      Maximum permissible test pressure

Refer to the information on the nameplate of the pressure transmitter and the data on the mounting flange<sup>1)</sup>

43 ... 1300 mbar a

4.3 ... 130 kPa a

17 ... 525 inH<sub>2</sub>O a

166 ... 5000 mbar a

16.6 ... 500 kPa a

2.41 ... 72.5 psi a

1 ... 30 bar a

0.1 ... 3 MPa a

14.5 ... 435 psi a

Depending on the process connection, the measuring span may differ from these values.

Measuring limits

- Low measuring limit
  - Measuring cell with silicone oil filling
- Upper measuring limit

0 bar a/0 kPa a/0 psi a

100% of max. measuring span

Lower range value

Between the measuring limits (infinitely adjustable)

## Output

## HART

Output signal

4 ... 20 mA

- Low saturation limit (infinitely adjustable)
- High saturation limit (infinitely adjustable)
- Ripple (without HART communication)

3.55 mA, factory preset to 3.8 mA

22.8 mA, factory-set to 20.5 mA or optionally 22.0 mA

 $I_{pp} \leq 0.5\%$  of max. output current

Adjustable damping

0 ... 100 s, continuously adjustable over remote operation

0 ... 100 s, in increments of 0.1 s, adjustable over display

- Current transmitter
- Failure signal

3.55 ... 22.8 mA

3.55 ... 22.8 mA

Load

Resistor R [ $\Omega$ ]

- Without HART communication

 $R = (U_H - 10.5 \text{ V}) / 22.8 \text{ mA}$  $U_H$ : Power supply in V

- With HART communication

 $R = 230 \dots 1100 \Omega$  (HART communicator (handheld)) $R = 230 \dots 500 \Omega$  (SIMATIC PDM)

Characteristic curve

- Linearly increasing or linearly decreasing
- Linear increase or decrease or according to the square root (only for differential pressure and flow)

Physical bus

-

Polarity-independent

-

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for gauge and absolute pressure, flush-mounted diaphragm

1

## SITRANS P320 / SITRANS P420 for gauge and absolute pressure, with flush-mounted diaphragm

### Gauge pressure measuring accuracy, with flush-mounted diaphragm

Reference conditions

- According to EN 60770-1
- Rising characteristic curve
- Lower range value 0 bar/kPa/psi
- Seal diaphragm stainless steel
- Measuring cell with silicone oil filling
- Room temperature 25 °C (77 °F)

Conformity error at limit point setting, including hysteresis and repeatability

Measuring span ratio  $r$  (spread, Turn-Down)

$r$  = maximum measuring span/set measuring span or nominal measuring range

- Linear characteristic
  - 1 bar/100 kPa/14.5 psi
  - 4 bar/400 kPa/58 psi
  - 16 bar/1.6 MPa/232 psi
  - 63 bar/6.3 MPa/914 psi

$$r \leq 5: \leq 0.075\%$$

$$5 < r \leq 100: \leq (0.005 \cdot r + 0.05)\%$$

Influence of ambient temperature  
in % per 28 °C (50 °F)

- 1 bar/100 kPa/14.5 psi
- 4 bar/400 kPa/58 psi
- 16 bar/1.6 MPa/232 psi
- 63 bar/6.3 MPa/914 psi

$$\leq (0.08 \cdot r + 0.16)\%$$

Influence of the temperature of medium  
(in pressure per temperature unit)

- Temperature difference between temperature of medium and ambient temperature

3 mbar/0.3 kPa/0.04 psi per 10 K

Long-term stability at  $\pm 30$  °C ( $\pm 54$  °F)

- 1 bar/100 kPa/14.5 psi
- 4 bar/400 kPa/58 psi
- 16 bar/1.6 MPa/232 psi
- 63 bar/6.3 MPa/914 psi

$$\text{In 5 years} \leq (0.25 \cdot r)\%$$

$$\text{In 5 years} \leq (0.125 \cdot r)\%$$

Step response time  $T_{63}$  (without electrical damping)

$$\leq 0.105 \text{ s}$$

Effect of mounting position (in pressure per change of angle)

0.4 mbar/0.04 kPa/0.006 per 10° incline  
(zero point correction is possible with position error compensation)

Effect of auxiliary power (in % per voltage change)

$$0.005\% \text{ per 1 V}$$

### Absolute pressure measuring accuracy with flush diaphragm

Reference conditions

- According to EN 60770-1
- Rising characteristic curve
- Lower range value 0 bar/kPa/psi
- Seal diaphragm stainless steel
- Measuring cell with silicone oil filling
- Room temperature 25 °C (77 °F)

Conformity error at limit point setting, including hysteresis and repeatability

Measuring span ratio  $r$  (spread, Turn-Down)

$r$  = maximum measuring span/set measuring span or nominal measuring range

- Linear characteristic
  - All measuring cells

$$r \leq 10: \leq 0.2\%$$

$$10 < r \leq 30: \leq 0.4\%$$

Influence of ambient temperature  
in % per 28 °C (50 °F)

- All measuring cells

$$\leq (0.16 \cdot r + 0.24)\%$$

Influence of the temperature of medium  
(in pressure per temperature unit)

- Temperature difference between temperature of medium and ambient temperature

3 mbar/0.3 kPa/0.04 psi per 10 K

Long-term stability at  $\pm 30$  °C ( $\pm 54$  °F)

- All measuring cells

$$\text{In 5 years} \leq (0.25 \cdot r)\%$$

Step response time  $T_{63}$  (without electrical damping)

$$\leq 0.105 \text{ s}$$

Effect of mounting position (in pressure per change of angle)

0.4 mbar/0.04 kPa/0.006 per 10° incline  
(zero point correction is possible with position error compensation)

Effect of auxiliary power (in % per voltage change)

$$0.005\% \text{ per 1 V}$$



**SITRANS P320 / SITRANS P420 for gauge and absolute pressure, with flush-mounted diaphragm****Operating conditions**Temperature of medium<sup>2)</sup>

- Measuring cell with silicone oil filling

-40 ... +150 °C (-40 ... +302 °F)  
-40 ... +200 °C (-40 ... +392 °F) with cooling extension  
-20 ... +100 °C (-4 ... +212 °F)  
-10 ... +150 °C (14 ... +302 °F)

- Measuring cell with inert oil

- Measuring cell with FDA-compliant oil

Ambient conditions

- Ambient temperature/enclosure

- Measuring cell with silicone oil filling
- Measuring cell with inert oil (different pressure classes)

Observe the temperature class in areas subject to explosion hazard.

-40 ... +85 °C (-40 ... +185 °F)

1 bar/100 kPa/14.5 psi

4 bar/400 kPa/58 psi

16 bar/1.6 MPa/232 psi

63 bar/6.3 MPa/914 ps

-40 ... +85 °C (-40 ... +185 °F)

- Measuring cell with FDA-compliant oil
- Display

-10 ... +85 °C (14 ... +185 °F)

-20 ... +80 °C (-4 ... +176 °F)

-50 ... +85 °C (-58 ... +185 °F) (with FDA-compliant oil: -20 ... +85 °C (-4 ... +185 °F))

- Storage temperature

- Climatic class in accordance with IEC 60721-3-4

- Degree of protection

- According to IEC 60529
- According to NEMA 250

IP66, IP68

Type 4X

- Electromagnetic compatibility

- Emitted interference and interference immunity

According to IEC 61326 and NAMUR NE 21

**Design**

Weight (pressure transmitter without mounting flange)

Material

- Wetted parts materials

- Process connection
- Seal diaphragm

- Non-wetted parts materials

- Electronics enclosure

Stainless steel, mat. no. 1.4404/316L

Stainless steel, material no. 1.4404/316L or Alloy C276, material no. 2.4819

- Low-copper die-cast aluminum GD-AISI 12 or stainless steel precision casting, mat. no. 1.4409/CF-3M

- Standard: Powder coating with polyurethane

Option: 2 coats: Coat 1: epoxy-based; coat 2: Polyurethane

- Stainless steel type plate (1.4404/316L)

Steel, electrogalvanized steel, or stainless steel

- Mounting bracket

Process connection

- Flanges according to EN and ASME

- F&B and pharmaceutical flanges

- BioConnect/BioControl

- PMC style

Electrical connection

Cable entry via the following screwed glands:

- M20 x 1.5

- ½-14 NPT

- Device plug Han 7D/Han 8D<sup>3)</sup>

- Device plug M12

**Displays and controls**

Keys

4 keys for operation directly on the device

Display

- With or without integrated display (optional)

- Cover with inspection window (optional)

**Auxiliary power  $U_H$** 

Terminal voltage on pressure transmitter

10.5 ... 45 V DC

10.5 ... 30 V DC in intrinsically safe mode

Ripple

 $U_{ss} \leq 0.2 \text{ V}$  (47 ... 125 Hz)

Noise

 $U_{eff} \leq 1.2 \text{ mV}$  (0.5 ... 10 kHz)

Auxiliary power

—

Separate supply voltage

—

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for gauge and absolute pressure, flush-mounted diaphragm

1

## SITRANS P320 / SITRANS P420 for gauge and absolute pressure, with flush-mounted diaphragm

### Certificates and approvals

Classification according to pressure equipment directive (PED 2014/68/EU)

Drinking water

- WRAS (England)
- ACS (France)
- NSF (USA)

CRN (Canada)

Explosion protection acc. to NEPSI (China)

Explosion protection acc. to INMETRO (Brazil)

Explosion protection

- Intrinsic safety "i"
  - Marking
  - Permissible ambient temperature
  - Permissible temperature of measuring medium
  - Connection
- Effective internal inductance/capacitance
- Flameproof enclosure "d"
  - Marking
  - Permissible ambient temperature
  - Permissible temperature of measuring medium
  - Connection
- Dust explosion protection for zones 21, 22
  - Marking
  - Permissible ambient temperature
  - Permissible temperature of measuring medium
  - Max. surface temperature
  - Connection
- Dust explosion protection for zones 20, 21, 22
  - Marking
  - Permissible ambient temperature
  - Permissible temperature of measuring medium
  - Connection
- Effective internal inductance/capacitance
- Type of protection for Zone 2
  - Marking
  - Permissible ambient temperature "ec"
  - Permissible temperature of measuring medium
  - "ec" connection

For gases of fluid group 1 and liquids of fluid group 1; complies with requirements of article 4, paragraph 3 (sound engineering practice)

No.: 1903094 (option E83)

No.: 18 ACC LY 277 (option E85)

No.: 20180920-MH61350 (option E84)

No.: 0F9863.5C (option E60)

No.: GYJ19.1058X (option E27)

No.: BRA-18-GE-0035X (option E25)

II 1/2 G Ex ia/ib IIC T4/T6 Ga/Gb

-40 ... +80 °C (-40 ... +176 °F) temperature class T4

-40 ... +70 °C (-40 ... +158 °F) temperature class T6

-40 ... +100 °C (-40 ... +212 °F) temperature class T4

-40 ... +70 °C (-40 ... +158 °F) temperature class T6

To certified intrinsically safe circuits with peak values:

$U_i = 30 \text{ V}$ ,  $I_i = 101 \text{ mA}$ ,  $P_i = 760 \text{ mW}$

$U_i = 29 \text{ V}$ ,  $I_i = 110 \text{ mA}$ ,  $P_i = 800 \text{ mW}$

$L_i = 0.24 \text{ } \mu\text{H}/C_i = 3.29 \text{ nF}$

Ex II 1/2 G Ex ia/db IIC T4/T6 Ga/Gb

-40 ... +80 °C (-40 ... +176 °F) temperature class T4

-40 ... +70 °C (-40 ... +158 °F) temperature class T6

-40 ... +100 °C (-40 ... +212 °F) temperature class T4

-40 ... +70 °C (-40 ... +158 °F) temperature class T6

To a circuit with the operating values:

$U_n = 10.5 \text{ to } 45 \text{ V}$ ,  $I_n = 4 \text{ ... } 20 \text{ mA}$

Ex II 2D Ex tb IIIC T120 °C Db

Ex II 3D Ex tc IIIC T120 °C Dc

-40 ... +80 °C (-40 ... +176 °F)

-40 ... +100 °C (-40 ... +212 °F)

120 °C (248 °F)

To a circuit with the operating values:

$U_n = 10.5 \text{ to } 45 \text{ V}$ ,  $I_n = 4 \text{ ... } 20 \text{ mA}$

Ex II 1D Ex ia IIIC T120 °C Da

Ex II 2D Ex ib IIIC T120 °C Db

-40 ... +80 °C (-40 ... +176 °F)

-40 ... +100 °C (-40 ... +212 °F)

To certified intrinsically safe circuits with the peak values:

$U_i = 30 \text{ V}$ ,  $I_i = 101 \text{ mA}$ ,  $P_i = 760 \text{ mW}$

$U_i = 29 \text{ V}$ ,  $I_i = 110 \text{ mA}$ ,  $P_i = 800 \text{ mW}$

$L_i = 0.24 \text{ } \mu\text{H}/C_i = 3.29 \text{ nF}$

Ex II 3G Ex ec IIC T4/T6 Gc

-40 ... +80 °C (-40 ... +176 °F) temperature class T4

-40 ... +40 °C (-40 ... +104 °F) temperature class T6

-40 ... +100 °C (-40 ... +212 °F) temperature class T4

-40 ... +70 °C (-40 ... +158 °F) temperature class T6

To a circuit with the operating values:

$U_n = 10.5 \text{ to } 30 \text{ V}$ ,  $I_n = 4 \text{ ... } 20 \text{ mA}$

**SITRANS P320 / SITRANS P420 for gauge and absolute pressure, with flush-mounted diaphragm**

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• Explosion protection acc. to FM           <ul style="list-style-type: none"> <li>- Marking (XP/DIP) or IS; NI; S</li> </ul> </li> <li>• Explosion protection according to CSA           <ul style="list-style-type: none"> <li>- Marking (XP/DIP) or (IS)</li> </ul> </li> </ul> | <p>Available soon</p> <p>CL I, DIV 1, GP ABCD T4 ... T6; CL II, DIV 1, GP EFG; CL III; Ex ia IIC T4 ... T6; CL I, DIV 2, GP ABCD T4 ... T6; CL II, DIV 2, GP FG; CL III</p> <p>Available soon</p> <p>CL I, DIV 1, GP ABCD T4 ... T6; CL II, DIV 1, GP EFG; CL III; Ex ia IIC T4 ... T6; CL I, DIV 2, GP ABCD T4 ... T6; CL II, DIV 2, GP FG; CL III</p> |
|---|---|
- NAMUR recommendations
- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• NE 06</li> <li>• NE 21</li> <li>• NE 23</li> <li>• NE 43</li> <li>• NE 53</li> <li>• NE 80</li> <li>• NE 105</li> <li>• NE 107</li> <li>• NE 131</li> </ul> | <p>Standardized Electrical Signals and Questions Relating to Engineering Technology</p> <p>Electromagnetic Compatibility (EMC) of Industrial Process and Laboratory Control Equipment</p> <p>Extra Low Voltage Circuits with Safe Separation</p> <p>Standardization of the Signal Level for the Failure Information of Digital Transmitters</p> <p>Software and Hardware of Field Devices and Signal Processing Devices with Digital Electronics</p> <p>The Application of the Pressure Equipment Directive to Process Control Devices</p> <p>Specifications for Integrating Fieldbus Devices in Engineering Tools for Field Devices</p> <p>Self-Monitoring and Diagnosis of Field Devices</p> <p>NAMUR Standard Device - Field Devices for Standard Applications</p> |
|--|---|
- 1) The MAWP value of the pressure transmitter can be lower than the PN value of the mounting flange and vice versa.  
To determine the maximum permissible operating pressure and the maximum permissible test pressure, use the lowest value as reference.
- 2) Observe the temperature limits in the process connection standards (e.g. DIN 32676 and DIN 11851) for the maximum temperature of medium for flush-mounted process connections.
- 3) Han 8D is identical to Han 8U.

**HART communication**

HART	230 ... 1100 Ω
Protocol	HART 7
Software for computer	SIMATIC PDM

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for gauge and absolute pressure, flush-mounted diaphragm

1

## Selection and ordering data

	Article No.
<b>Pressure transmitter for gauge and absolute pressure, with flush-mounted diaphragm</b>	
<b>SITRANS P320 for gauge pressure</b>	➤ 7MF030 - - - - -
<b>SITRANS P420 for gauge pressure</b>	➤ 7MF040 - - - - -
<b>SITRANS P320 for absolute pressure</b>	➤ 7MF032 - - - - -
<b>SITRANS P420 for absolute pressure</b>	➤ 7MF042 - - - - -
➤ Click on the Article no. for the online configuration in the PIA Life Cycle Portal.	
<b>Communication</b>	
HART, 4 ... 20 mA	0
<b>Measuring cell filling</b>	
Silicone oil	1
Inert filling liquid	3
Neobee oil	4
<b>Maximum measuring span</b>	
1000 mbar (14.5 psi)	0 J
4000 mbar (58 psi)	0 N
16 bar (232 psi)	0 Q
63 bar (914 psi)	0 T
1 300 mbar a (18.9 psi a)	2 L
5000 mbar a (72.5 psi a)	2 P
30 bar a (435 psi a)	2 R
<b>Process connection</b>	
Flush-mounted diaphragm	K
<b>Wetted parts materials: Process connection, seal diaphragm</b>	
Stainless steel 316L/1.4404, stainless steel 316L/1.4404	0
Stainless steel 316L/1.4404, alloy C276/2.4819	1
Alloy C22/2.4602, alloy C276/2.4819	2
<b>Non-wetted parts materials</b>	
Die-cast aluminum	1
Stainless steel precision casting CF3M/1.4409 similar to 316L	2
<b>Enclosure</b>	
Dual chamber device	5
<b>Type of protection</b>	
Without Ex	A
Intrinsic safety	B
Flameproof enclosure	C
Flameproof enclosure, intrinsic safety	D
Dust protection by enclosure Zone 21/22 (DIP), increased safety Zone 2	L
Dust protection by enclosure Zone 20/21/22 (DIP), increased safety Zone 2	M
Combination of options B, C and L (zone model)	S
Combination of options B, C and M (zone model, Class Division)	T
<b>Electrical connections/cable entries</b>	
Thread for cable gland: Cable gland must be ordered separately as option (Axx)	
• 2 x M20 x 1.5	F
• 2 x ½-14 NPT	M
<b>Local operation/display</b>	
Without display (cover closed)	0
With display (cover closed)	1
With display (cover with glass pane)	2

## Selection and ordering data

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Cable glands included</b>	
Plastic	<b>A00</b>
Metal	<b>A01</b>
Stainless steel	<b>A02</b>
Stainless steel 316L/1.4404	<b>A03</b>
CMP, for XP devices	<b>A10</b>
CAPRI ADE 4F, CuZn, cable inner diameter 7 ... 12 mm, cable outer diameter 10 ... 16 mm	<b>A11</b>
CAPRI ADE 4F, stainless steel, cable inner diameter 7 ... 12 mm, cable outer diameter 10 ... 16 mm	<b>A12</b>
<b>Device plug Han mounted left</b>	
Device plug Han 7D (plastic, straight)	<b>A30</b>
Device plug Han 7D (plastic, angled)	<b>A31</b>
Device plug Han 7D (metal, straight)	<b>A32</b>
Device plug Han 7D (metal, angled)	<b>A33</b>
Device plug Han 8D (plastic, straight)	<b>A34</b>
Device plug Han 8D (plastic, angled)	<b>A35</b>
Device plug Han 8D (metal, straight)	<b>A36</b>
Device plug Han 8D (metal, angled)	<b>A37</b>
<b>Cable socket included</b>	
Plastic, for device plug Han 7D and Han 8D	<b>A40</b>
Metal, for device plug Han 7D and Han 8D	<b>A41</b>
<b>Device plug M12 mounted left</b>	
Stainless steel, without cable socket	<b>A62</b>
Stainless steel, with cable socket	<b>A63</b>
<b>Cable entry/connector mounting</b>	
2x sealing plugs M20 x 1.5, IP66/68 installed on both sides	<b>A90</b>
2x sealing plugs ½-14 NPT, IP66/68 installed on both sides	<b>A91</b>
Cable gland/connector mounted left	<b>A97</b>
Cable gland/connector mounted on right	<b>A99</b>
<b>Nameplate labeling (standard labeling: English, unit bar)</b>	
German (bar)	<b>B11</b>
French (bar)	<b>B12</b>
Spanish (bar)	<b>B13</b>
Italian (bar)	<b>B14</b>
Chinese (bar)	<b>B15</b>
Russian (bar)	<b>B16</b>
English (psi)	<b>B20</b>
English (Pa)	<b>B30</b>
Chinese (Pa)	<b>B35</b>
<b>Certificates</b>	
Quality test certificate, 5-point factory calibration (IEC 60770-2)	<b>C11</b>
Inspection certificate (EN 10204-3.1) - Material of pressurized and wetted parts	<b>C12</b>
Factory certificate - NACE (MR 0103-2012 and MR 0175-2009))	<b>C13</b>
Factory certificate (EN 10204-2.2) - Wetted parts	<b>C14</b>
Inspection certificate (EN 10204-3.1) - PMI test of pressurized and wetted parts	<b>C15</b>
<b>Certificates for functional safety</b>	
Functional safety (IEC 61508) - SIL2/3	<b>C20</b>

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Device options</b>	
PDF file with device settings	<b>D10</b>
Double layer coating (epoxy resin and polyurethane) 120 µm of enclosure and cover	<b>D20</b>
FVMQ enclosure sealing	<b>D21</b>
IP66/IP68 degree of protection (not for device plugs M12 and Han )	<b>D30</b>
TAG label empty	<b>D40</b>
Without labeling of the measuring range on the TAG label	<b>D41</b>
Stainless steel Ex plate 1.4404/316L	<b>D42</b>
Overvoltage protection up to 6 kV (external)	<b>D71</b>
Adhesive labels on transport packaging (supplied by customer)	<b>D90</b>
<b>General approval without Ex approval</b>	
Worldwide (CE, RCM) except EAC, FM, CSA, KCC	<b>E00</b>
Worldwide (CE, RCM, EAC, FM, CSA, KCC)	<b>E01</b>
CSA (USA and Canada)	<b>E06</b>
EAC	<b>E07</b>
FM	<b>E08</b>
KCC	<b>E09</b>
Export approval CPA (China)	<b>E12</b>
<b>Explosion protection approvals</b>	
ATEX (Europe)	<b>E20</b>
CSA (USA and Canada)	<b>E21</b>
FM (USA and Canada)	<b>E22</b>
IECEX (Worldwide)	<b>E23</b>
EACEx (GOST-R, -K, -B)	<b>E24</b>
INMETRO (Brazil)	<b>E25</b>
KCs (Korea)	<b>E26</b>
NEPSI (China)	<b>E27</b>
PESO (India)	<b>E28</b>
UKR Sepro (Ukraine)	<b>E30</b>
ATEX (Europe) and IECEX (Worldwide)	<b>E47</b>
CSA (Canada) and FM (USA)	<b>E48</b>
ATEX (Europe) and IECEX (Worldwide) + CSA (Canada) and FM (USA)	<b>E49</b>
<b>Marine approvals</b>	
DNV-GL (Det Norske Veritas/Germanischer Lloyd)	<b>E50</b>
LR (Lloyds Register)	<b>E51</b>
BV (Bureau Veritas)	<b>E52</b>
ABS (American Bureau of Shipping)	<b>E53</b>
RMR (Russian Maritime Register)	<b>E55</b>
KR (Korean Register of Shipping)	<b>E56</b>
RINA (Registro Italiano Navale)	<b>E57</b>
CCS (China Classification Society)	<b>E58</b>
<b>Country-specific approvals</b>	
CRN approval Canada (Canadian Registration Number)	<b>E60</b>

## Pressure Measurement

### Pressure transmitters

for applications with advanced requirements (Advanced)

SITRANS P320/P420

for gauge and absolute pressure, flush-mounted diaphragm

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Special approvals</b>	
Oxygen application (with inert liquid, max. 100 bar (1 450 psi) at 60° C (140 °F))	<b>E80</b>
Dual seal	<b>E81</b>
WRC / WRAS (drinking water); only with pressure cap O-rings made of EPDM	<b>E83</b>
NSF61 (drinking water)	<b>E84</b>
ACS (drinking water)	<b>E85</b>
3A (hygiene)	<b>E86</b>
EHEDG (hygiene)	<b>E87</b>
<b>Process flanges, gaskets (instead of standard gaskets FKM (FPM))</b>	
Seal (EN 837-1) material Fe (soft iron)	<b>K60</b>
Seal (EN 837-1) material 1.4571	<b>K61</b>
Seal (EN 837-1) material Cu	<b>K62</b>
<b>Process connection</b>	
Process connection male thread G½, bore hole 11 mm	<b>K80</b>
<b>Flanges according to DIN EN 1092-1 Form B1 and ASME standard B16.5</b>	
EN 1092-1 Form B1	
• DN 50 PN 16	<b>M03</b>
• DN 80 PN 16	<b>M05</b>
• DN 25 PN 40	<b>M10</b>
• DN 40 PN 40	<b>M12</b>
• DN 50 PN 40	<b>M13</b>
• DN 80 PN 40	<b>M15</b>
• DN 40 PN 100	<b>M22</b>
ASME B16.5	
• 1" Class 150 RF	<b>M30</b>
• 1 ½" Class 150 RF	<b>M31</b>
• 2" Class 150 RF	<b>M32</b>
• 3" Class 150 RF	<b>M33</b>
• 4" Class 150 RF	<b>M34</b>
• 1 ½" Class 300 RF	<b>M36</b>
• 2" Class 300 RF	<b>M37</b>
• 3" Class 300 RF	<b>M38</b>
• 4" Class 300 RF	<b>M39</b>
<b>Sanitary connections in accordance with the standard</b>	
Sanitary flange DIN 11851	
• with slotted union nut DN 50 PN 25	<b>N03</b>
• with slotted union nut DN 80 PN 25	<b>N05</b>
Tri-Clamp	
• DIN 32676 DN 50 PN 16	<b>N14</b>
• DIN 32676 DN 65 PN 10	<b>N15</b>
• ISO 2852 2" PN 40	<b>N22</b>
• ISO 2852 3" PN 40	<b>N23</b>
Aseptic threaded socket	
• DIN 11864-1 Form A DN 50 PN 25	<b>N33</b>
• DIN 11864-1 Form A DN 65 PN 25	<b>N34</b>
• DIN 11864-1 Form A DN 80 PN 25	<b>N35</b>
• DIN 11864-1 Form A DN100 PN 25	<b>N36</b>
Aseptic flange with notch	
• DIN 11864-2 Form A DN 50 PN 16	<b>N43</b>
• DIN 11864-2 Form A DN 65 PN 16	<b>N44</b>
• DIN 11864-2 Form A DN 80 PN 16	<b>N45</b>
• DIN 11864-2 Form A DN100 PN 16	<b>N46</b>
Aseptic clamp with groove	
• DIN 11864-3 Form A DN 50 PN 25	<b>N53</b>
• DIN 11864-3 Form A DN 65 PN 25	<b>N54</b>
• DIN 11864-3 Form A DN 80 PN 16	<b>N55</b>
• DIN 11864-3 Form A DN100 PN 16	<b>N56</b>

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Sanitary connections manufacturer-specific</b>	
Varivent type N for pipes DN 40 ... DN 125 PN 40	<b>P06</b>
<b>Sanitary connections special design</b>	
Tank connection	
• TG 52/50 PN 40 with seal	<b>Q00</b>
• TG 52/150 PN 40 with seal	<b>Q01</b>
DRD flange D = 65 mm DN 50 PN 40	<b>Q15</b>
SMS socket	
• with thread 2" PN 25	<b>Q28</b>
• with thread 2 ½" PN 25	<b>Q29</b>
• with thread 3" PN 25	<b>Q30</b>
<b>Weldable sockets for tank connection</b>	
Weldable piece for TG52/50	<b>Q90</b>
Weldable piece for TG52/150	<b>Q91</b>
<b>Connections for the paper industry</b>	
Process connection PMC Style Standard	<b>R00</b>
Process connection PMC Style Minibolt	<b>R01</b>
Weldable sockets for PMC Style Standard	<b>R02</b>
Weldable sockets for PMC Style Minibolt	<b>R03</b>
<b>Threaded connection</b>	
Male thread G¾-A DIN 3852	<b>R11</b>
Male thread G1-A DIN 3852	<b>R12</b>
Male thread G2-A DIN 3852	<b>R14</b>
<b>Special options front-flush</b>	
Temperature decoupler (media temperature up to 200 °C)	<b>R85</b>
Mating connector including seal	<b>R90</b>

Options	Order code
Append <b>"Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Device settings</b>	
Measuring span Lower range value (max. 5 characters), upper range value (max. 5 characters), unit [mbar, bar, kPa, MPa, psi, ...], example: -0.5 ... 10.5 psi Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot). Drop-down list: Pa, MPa, kPa, hPa, bar, mbar, psi, g/cm <sup>2</sup> , kg/cm <sup>2</sup> , kgf/cm <sup>2</sup> , inH <sub>2</sub> O, inH <sub>2</sub> O (4°C), ftH <sub>2</sub> O, mmH <sub>2</sub> O, mmH <sub>2</sub> O (4°C), mH <sub>2</sub> O (4°C), mmHg, inHg, atm, torr	<b>Y01</b>
TAG (on stainless steel plate and device parameters, max. 32 characters) Input field: Free text, max. 32 characters	<b>Y15</b>
Measuring point description (on stainless steel plate and device parameters, max. 32 characters) Input field: Free text, max. 32 characters	<b>Y16</b>
TAG short (device parameters, max. 8 characters) Input field: Free text, max. 8 characters	<b>Y17</b>
Local display [Pressure, Percent], reference [None, Absolute, Relative], example: Pressure gauge Drop-down list: Percent, pressure unit, pressure unit abs., pressure unit gauge	<b>Y21</b>
Local display Scaling with standard units [m <sup>3</sup> /s, l/s, m, inch, ...], example 1 ... 5 m Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot). Drop-down list: m, cm, mm, in, ft, m <sup>3</sup> , l, hl, in <sup>3</sup> , ft <sup>3</sup> , yd <sup>3</sup> , gal, gal (UK), bu, bbl, bbl (US), SCF, Nm <sup>3</sup> , NI.	<b>Y22</b>
Local display Scaling with user-specific units (max. 12 characters), example 1 ... 5 m Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot). Input field 3: Free text, max. 8 characters	<b>Y23</b>
Saturation limits instead of 3.8 ... 20.5 mA, example: 3.8 ... 22.0 mA Drop-down list 1: 3.9, 4 Drop-down list 2: 20.8, 22	<b>Y30</b>
Fault current instead of 3.6 mA [22.5 mA, 22.8 mA] Drop-down list: 3.75; 21.75; 22.5; 22.6	<b>Y31</b>
Damping in seconds instead of 2 s (0.0 ... 100.0 s) Input field: max. 4 characters and numbers only; decimal places as dot (comma is automatically converted to dot); min. value = 0; max. value = 100.	<b>Y32</b>
ID number of special version Input field: max. 4 characters and only natural numbers from 0 ... 9999	<b>Y99</b>



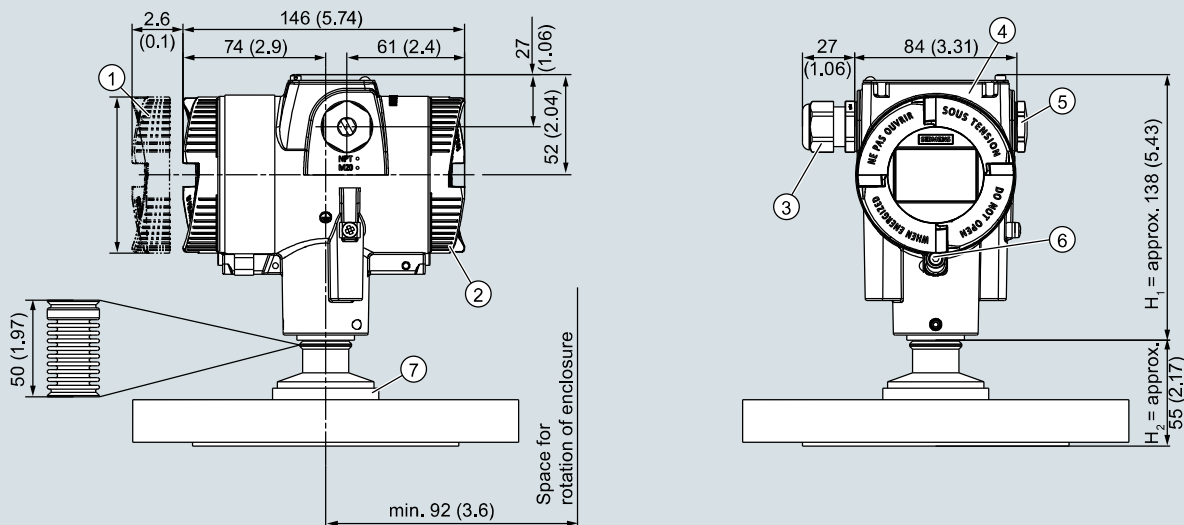
# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for gauge and absolute pressure, flush-mounted diaphragm

1

## Dimensional drawings



① Electronics side, local display  
(longer overall length for cover with glass pane)<sup>1)</sup>

② Connection side

③ Electrical connection:

- M20 x 1,5<sup>3)</sup> screw gland
- 1/2-14 NPT screw gland
- Han 7D/Han 8D<sup>2) 3)</sup> device plug
- M12 device plug<sup>2) 3)</sup>

<sup>1)</sup> In addition, allow approx. 22 mm (0.87 inch) for the thread length when removing the covers

<sup>2)</sup> Not with "flameproof enclosure" type of protection

<sup>3)</sup> Not with type of protection "FM + CSA" [is + XP]"

④ Cover over buttons and nameplate  
with general information

⑤ Blanking plug

⑥ Safety catch  
(only for "flameproof enclosure" type of protection)

⑦ Process connection

SITRANS P320/P420 pressure transmitter, with flush-mounted diaphragm, dimensions in mm (inch)


This figure consists of a SITRANS P320/P420 with an example flange.  
In this figure, the height is divided into  $H_1$  and  $H_2$ .

$H_1$  = Height of the SITRANS P320/P420 up to a defined cross-section


$H_2$  = Height of the flange up to this defined cross-section

Only the height  $H_2$  is indicated in the dimensions of the flanges.


**Flanges according to EN and ASME**Flange according to EN

EN 1092-1					
	Order code	DN	PN	ØD	H <sub>2</sub>
	M03	50	16	165 mm (6.5")	Approx. 52 mm (2")
	M05	80	16	200 mm (7.9")	
	M10	25	40	115 mm (4.5")	
	M12	40	40	150 mm (5.9")	
	M13	50	40	165 mm (6.5")	
	M15	80	40	200 mm (7.9")	
	M22	40	100	170 mm (6.7")	


Flanges according to ASME

ASME B16.5					
	Order code	DN	Class	ØD	H <sub>2</sub>
	M30	1"	150	110 mm (4.3")	Approx. 52 mm (2")
	M31	1½"	150	125 mm (4.9")	
	M32	2"	150	150 mm (5.9")	
	M33	3"	150	190 mm (7.5")	
	M34	4"	150	230 mm (9.1")	
	M36	1½"	300	155 mm (6.1")	
	M37	2"	300	165 mm (6.5")	
	M38	3"	300	210 mm (8.1")	
	M39	4"	300	255 mm (10.0")	


**NuG and pharmaceutical connections**Connections to DIN

DIN 11851 (milk pipe union with slotted union nut)					
	Order code	DN	PN	ØD	H <sub>2</sub>
	N03	50	25	92 mm (3.6")	Approx. 52 mm (2")
	N05	80	25	127 mm (5.0")	


TriClamp according to DIN 32676

	Order code	DN	PN	ØD	H <sub>2</sub>
	N14	50	16	64 mm (2.5")	Approx. 52 mm (2")
	N15	65	16	91 mm (3.6")	
	N22	2"	16	64 mm (2.5")	Approx. 52 mm (2")
	N23	3"	10	91 mm (3.6")	


Other connections**Varivent connection**

	Order code	DN	PN	ØD	H <sub>2</sub>
	P06	40 ... 125	40	84 mm (3.3")	Approx. 52 mm (2")


**Sanitary process connection according to DRD**

	Order code	DN	PN	ØD	H <sub>2</sub>
	Q15	65	40	105 mm (4.1")	Approx. 52 mm (2")


**Threaded connection G¾", G1" and G2" acc. to DIN 3852**

	Order code	DN	PN	ØD	H <sub>2</sub>
	R11	¾"	60	37 mm (1.5")	Approx. 45 mm (1.8")
	R12	1"	60	48 mm (1.9")	Approx. 47 mm (1.9")
	R14	2"	60	78 mm (3.1")	Approx. 52 mm (2")

**Tank connection TG 52/50 and TG52/150**

	Order code	DN	PN	ØD	H <sub>2</sub>
	Q00	25	40	63 mm (2.5")	Approx. 63 mm (2.5")
	Q01	25	40	63 mm (2.5")	Approx. 170 mm (6.7")

**SMS threaded socket**

	Order code	DN	PN	ØD	H <sub>2</sub>
	Q28	2"	25	70 x 1/6 mm	Approx. 52 mm (2.1")
	Q29	2½"	25	85 x 1/6 mm	
	Q30	3"	25	98 x 1/6 mm	

## Pressure Measurement


Pressure transmitters

for applications with advanced requirements (Advanced)


SITRANS P320/P420

for gauge and absolute pressure, flush-mounted diaphragm


### Aseptic threaded socket according to DIN 11864-1 Form A

	Order code	DN	PN	ØD	H <sub>2</sub>
	N33	50	25	78 x 1/6"	Approx. 52 mm (2.1")
	N34	65	25	95 x 1/6"	
	N35	80	25	110 x 1/4"	
	N36	100	25	130 x 1/4"	


### Aseptic flange with notch to DIN 11864-2 Form A

	Order code	DN	PN	ØD	H <sub>2</sub>
	N43	50	16	94 (3.7")	Approx. 52 mm (2.1")
	N44	65	16	113 (4.4")	
	N45	80	16	133 (5.2")	
	N46	100	16	159 (6.3")	


### Aseptic clamp with groove according to DIN 11864-3 Form A

	Order code	DN	PN	ØD	H <sub>2</sub>
	N53	50	25	77.5 (3.1")	Approx. 52 mm (2.1")
	N54	65	25	91 (3.6")	
	N55	80	16	106 (4.2")	
	N56	100	16	130 (5.1")	

### Process connection PMC Style Standard

	Order code	DN	PN	ØD	H <sub>2</sub>
	R00	-	-	40.9 mm (1.6")	Approx. 36.8 mm (1.4")

### Process connection PMC Style Minibolt

	Order code	DN	PN	ØD	H <sub>2</sub>
	R01	-	-	26.3 mm (1.0")	Approx. 33.1 mm (1.3")

## Technical specifications

## SITRANS P320 / SITRANS P420 for absolute pressure (pressure series)

## Input

Measured variable	Absolute pressure		
Measuring span (infinitely adjustable) or measuring range, max. permissible operating pressure (in accordance with Pressure Equipment Directive 2014/68/EU) and max. test pressure (pursuant to DIN 16086)	Measuring span	Max. permissible operating pressure MAWP (PS)	Maximum permissible test pressure
	8.3 ... 250 mbar a	4 bar a	6 bar a
	0.83 ... 25 kPa a	0.4 MPa a	0.6 MPa a
	3.3 ... 100.5 inH <sub>2</sub> O a	58 psi a	87 psi a
	43 ... 1300 mbar a	6.6 bar a	10 bar a
	4.3 ... 130 kPa a	0.66 MPa a	1 MPa a
	17.3 ... 522 inH <sub>2</sub> O a	95 psi a	145 psi a
	166 ... 5000 mbar a	20 bar a	30 bar a
	16.6 ... 500 kPa a	2 MPa a	3 MPa a
	2.41 ... 72.5 psi a	290 psi a	435 psi a
	1 ... 30 bar a	65 bar a	100 bar a
	0.1 ... 3 MPa a	6.5 MPa a	10 MPa a
	14.5 ... 435 psi a	942 psi a	1450 psi a
	5.3 ... 160 bar a	240 bar	380 bar a
	0.53 ... 16 MPa a	24 MPa	38 MPa a
	77 ... 2321 psi a	3481 psi	5511 psi a
	13.3 ... 400 bar a	400 bar a	600 bar a
	1.3 ... 40 MPa a	40 MPa a	60 MPa a
	192 ... 5802 psi a	5802 psi a	8702 psi a
	23.3 ... 700 bar a	800 bar a	800 bar a
	2.3 ... 70 MPa a	80 MPa a	80 MPa a
	337 ... 10153 psi a	11603 psi a	11603 psi a
Measuring limits	0 mbar a/kPa a/psi a		
• Low measuring limit	For temperature of medium -20 °C < $\vartheta$ ≤ +60 °C (-4 °F < $\vartheta$ ≤ +140 °F)		
- Measuring cell with silicone oil filling	30 mbar a/3 kPa a/0.44 psi a		
- Measuring cell with inert oil	For temperature of medium 60 °C < $\vartheta$ ≤ +100 °C (max. 85 °C for measuring cell 30 bar) (140 °F < $\vartheta$ ≤ +212 °F (max. 185 °F for measuring cell 435 psi))		
	30 mbar a + 20 mbar a · ( $\vartheta$ - 60 °C)/°C		
	3 kPa a + 2 kPa a · ( $\vartheta$ - 60 °C)/°C		
	0.44 psi a + 0.29 psi a · ( $\vartheta$ - 140 °F)/°F		
• Upper measuring limit	100% of the max. measuring span (for oxygen measurement max. 100 bar/10 MPa/ 1450 psi and 60 °C (140 °F) ambient temperature/temperature of medium)		
• Lower range value	Between the measuring limits (infinitely adjustable)		

## Output

Output signal	4 ... 20 mA
• Low saturation limit (infinitely adjustable)	3.55 mA, factory preset to 3.8 mA
• High saturation limit (infinitely adjustable)	22.8 mA, factory-set to 20.5 mA or optionally 22.0 mA
• Ripple (without HART communication)	$I_{pp} \leq 0.5\%$ of max. output current
Adjustable damping	0 ... 100 s, continuously adjustable over remote operation
	0 ... 100 s, in increments of 0.1 s, adjustable over display
• Current transmitter	3.55 ... 22.8 mA
• Failure signal	3.55 ... 22.8 mA (factory preset to 3.55 mA)
Load	Resistor R [Ω]
• Without HART communication	$R = (U_H - 10.5 \text{ V})/22.8 \text{ mA}$ , $U_H$ : Power supply in V
• With HART communication	$R = 230 \dots 1100 \text{ } \Omega$ (HART communicator (handheld)) $R = 230 \dots 500 \text{ } \Omega$ (SIMATIC PDM)
Characteristic curve	<ul style="list-style-type: none"> <li>Linearly increasing or linearly decreasing</li> <li>Linear increase or decrease or according to the square root (only for differential pressure and flow)</li> </ul>
Physical bus	-
Polarity-independent	-

# Pressure Measurement

## Pressure transmitters

for applications with advanced requirements (Advanced)

SITRANS P320/P420

for absolute pressure (pressure series)

1

### SITRANS P320 / SITRANS P420 for absolute pressure (pressure series)

#### Measuring accuracy

Reference conditions

- According to EN 60770-1
- Rising characteristic curve
- Lower range value 0 bar/kPa/psi
- Seal diaphragm stainless steel
- Measuring cell with silicone oil filling
- Room temperature 25 °C (77 °F)

Conformity error at limit point setting, including hysteresis and repeatability

Measuring span ratio  $r$  (spread, Turn-Down)

- Linear characteristic (all measuring cells)

- $r \leq 10$
- $10 < r \leq 30$

$r$  = maximum measuring span/set measuring span or nominal measuring range

$\leq 0.1\%$   
 $\leq 0.2\%$

Influence of ambient temperature  
(in % per 28 °C (50 °F))

- 250 mbar a/25 kPa a/3.6 psi a
- 1300 mbar a/130 kPa a/18.8 psi a
- 5 bar a/500 kPa a/72.5 psi a
- 30 bar a/3000 kPa a/435 psi a
- 160 bar a/16 MPa a/2321 psi a
- 400 bar a/40 MPa a/5802 psi a
- 700 bar a/70 MPa a/10153 psi a

$\leq (0.15 \cdot r + 0.1)\%$   
 $\leq (0.08 \cdot r + 0.16)\%$

Long-term stability at  $\pm 30$  °C ( $\pm 54$  °F)

In 5 years  $\leq (0.25 \cdot r)\%$

Step response time  $T_{63}$  (without electrical damping)

Approx. 0.105 s

Effect of mounting position (in pressure per change of angle)

$\leq 0.05$  mbar/0.005 kPa/0.000725 psi per 10° incline  
(zero point correction is possible with position error compensation)

Effect of auxiliary power (in % per voltage change)

0.005% per 1 V

#### Operating conditions

Temperature of medium

- Measuring cell with silicone oil filling
- Measuring cell with inert filling fluid

-40 ... +100 °C (-40 ... +212 °F)  
-20 ... +100 °C (-4 ... +212 °F)

Ambient conditions

- Ambient temperature/enclosure
  - Measuring cell with silicone oil filling
  - Measuring cell with inert filling fluid
  - Display
- Storage temperature
- Climatic class in accordance with IEC 60721-3-4
- Degree of protection
  - According to IEC 60529
  - According to NEMA 250
- Electromagnetic compatibility
  - Emitted interference and interference immunity

Observe the temperature class in areas subject to explosion hazard.  
-40 ... +85 °C (-40 ... +185 °F)  
-40 ... +85 °C (-40 ... +185 °F)  
-20 ... +80 °C (-4 ... +176 °F)  
-50 ... +85 °C (-58 ... +185 °F) (with FDA-compliant oil: -20 ... +85 °C (-4 ... +185 °F))  
4K4H  
IP66, IP68  
Type 4X  
According to IEC 61326 and NAMUR NE 21

**SITRANS P320 / SITRANS P420 for absolute pressure (pressure series)****Design**

Weight	Approx. 2.3 kg (5.07 lb) with aluminum enclosure Approx. 4.2 kg (9.25 lb) for stainless steel enclosure
Material	
• Wetted parts materials	
- Process connection	Stainless steel, material no. 1.4404/316L or Alloy C22, material no. 2.4602
- Oval flange	Stainless steel, mat. no. 1.4404/316L
- Seal diaphragm	Stainless steel, material no. 1.4404/316L or Alloy C276, material no. 2.4819
• Non-wetted parts materials	
- Electronics enclosure	<ul style="list-style-type: none"> <li>• Low-copper die-cast aluminum GD-AISI 12 or stainless steel precision casting, mat. no. 1.4409/ CF-3M</li> <li>• Standard: Powder coating with polyurethane</li> <li>Option: 2 coats: Coat 1: epoxy-based; coat 2: Polyurethane</li> <li>• Stainless steel type plate (1.4404/316L)</li> </ul>
- Mounting bracket	Electrogalvanized steel or stainless steel
Process connection	<ul style="list-style-type: none"> <li>• Connection shank G1/2A according to DIN EN 837-1</li> <li>• Female thread 1/2-14 NPT</li> <li>• Male thread M20 x 1.5 and 1/2-14 NPT</li> <li>• Oval flange (PN 160 (MWP 2320 psi g)) with fastening screw thread: <ul style="list-style-type: none"> <li>- 7/16-20 UNF according to EN 61518</li> <li>- M10 according to DIN 19213</li> </ul> </li> <li>• Oval flange (PN 420 (MWP 2320 psi g)) with fastening screw thread: <ul style="list-style-type: none"> <li>- 7/16-20 UNF according to EN 61518</li> <li>- M12 according to DIN 19213</li> </ul> </li> <li>• Male thread M20 x 1.5 and 1/2-14 NPT</li> </ul>
Electrical connection	Cable entry via the following screwed glands: <ul style="list-style-type: none"> <li>• M20 x 1.5</li> <li>• 1/2-14 NPT</li> <li>• Device plug Han 7D/Han 8D<sup>1)</sup></li> <li>• Device plug M12</li> </ul>

**Displays and controls**

Keys	4 keys for operation directly on the device
Display	<ul style="list-style-type: none"> <li>• With or without integrated display (optional)</li> <li>• Cover with inspection window (optional)</li> </ul>

**Auxiliary power  $U_H$** 

Terminal voltage on pressure transmitter	10.5 ... 45 V DC 10.5 ... 30 V DC in intrinsically safe mode
Ripple	$U_{SS} \leq 0.2 \text{ V}$ (47 ... 125 Hz)
Noise	$U_{eff} \leq 1.2 \text{ mV}$ (0.5 ... 10 kHz)
Auxiliary power	—
Separate supply voltage	—

**Certificates and approvals**

Classification according to pressure equipment directive (PED 2014/68/EU)	For gases of fluid group 1 and liquids of fluid group 1; complies with requirements of article 4, paragraph 3 (sound engineering practice)
Drinking water	
• WRAS (England)	No.: 1903094 (option E83)
• ACS (France)	No.: 18 ACC LY 277 (option E85)
• NSF (USA)	No.: 20180920-MH61350 (option E84)
CRN (Canada)	No.: 0F9863.5C (option E60)
Explosion protection acc. to NEPSI (China)	No.: GYJ19.1058X (option E27)
Explosion protection acc. to INMETRO (Brazil)	No.: BRA-18-GE-0035X (option E25)
Explosion protection	
• Intrinsic safety "i"	
- Marking	II 1/2 G Ex ia/ib IIC T4/T6 Ga/Gb
- Permissible ambient temperature	-40 ... +80 °C (-40 ... +176 °F) temperature class T4 -40 ... +70 °C (-40 ... +158 °F) temperature class T6
- Permissible temperature of measuring medium	-40 ... +100 °C (-40 ... +212 °F) temperature class T4 -40 ... +70 °C (-40 ... +158 °F) temperature class T6
- Connection	To certified intrinsically safe circuits with peak values: $U_i = 30 \text{ V}$ , $I_i = 101 \text{ mA}$ , $P_i = 760 \text{ mW}$ $U_i = 29 \text{ V}$ , $I_i = 110 \text{ mA}$ , $P_i = 800 \text{ mW}$ $L_i = 0.24 \text{ } \mu\text{H}/C_i = 3.29 \text{ nF}$
- Effective internal inductance/capacitance	
• Flameproof enclosure "d"	
- Marking	Ex II 1/2 G Ex ia/db IIC T4/T6 Ga/Gb
- Permissible ambient temperature	-40 ... +80 °C (-40 ... +176 °F) temperature class T4 -40 ... +70 °C (-40 ... +158 °F) temperature class T6
- Permissible temperature of measuring medium	-40 ... +100 °C (-40 ... +212 °F) temperature class T4 -40 ... +70 °C (-40 ... +158 °F) temperature class T6
- Connection	To a circuit with the operating values: $U_n = 10.5 \text{ to } 45 \text{ V}$ , $I_n = 4 \text{ to } 20 \text{ mA}$

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for absolute pressure (pressure series)

1

## SITRANS P320 / SITRANS P420 for absolute pressure (pressure series)

<ul style="list-style-type: none"> <li>Dust explosion protection for zones 21, 22           <ul style="list-style-type: none"> <li>Marking</li> </ul> </li> <li>Permissible ambient temperature</li> <li>Permissible temperature of measuring medium</li> <li>Max. surface temperature</li> <li>Connection</li> </ul>	Ex II 2D Ex tb IIIC T120 °C Db Ex II 3D Ex tc IIIC T120 °C Dc -40 ... +80 °C (-40 ... +176 °F) -40 ... +100 °C (-40 ... +212 °F) 120 °C (248 °F) To a circuit with the operating values: $U_n = 10.5$ to 45 V, 4 ... 20 mA
<ul style="list-style-type: none"> <li>Dust explosion protection for zones 20, 21, 22           <ul style="list-style-type: none"> <li>Marking</li> </ul> </li> <li>Permissible ambient temperature</li> <li>Permissible temperature of measuring medium</li> <li>Connection</li> </ul>	Ex II 1D Ex ia IIIC T120 °C Da Ex II 2D Ex ib IIIC T120 °C Db -40 ... +80 °C (-40 ... +176 °F) -40 ... +100 °C (-40 ... +212 °F) To certified intrinsically safe circuits with the peak values: $U_i = 30$ V, $I_i = 101$ mA, $P_i = 760$ mW $U_i = 29$ V, $I_i = 110$ mA, $P_i = 800$ mW $L_i = 0.24$ µH/ $C_i = 3.29$ nF
<ul style="list-style-type: none"> <li>Effective internal inductance/capacitance</li> <li>Type of protection for Zone 2           <ul style="list-style-type: none"> <li>Marking</li> <li>Permissible ambient temperature "ec"</li> </ul> </li> <li>Permissible temperature of measuring medium</li> <li>"ec" connection</li> </ul>	Ex II 3G Ex ec IIC T4/T6 Gc -40 ... +80 °C (-40 ... +176 °F) temperature class T4 -40 ... +40 °C (-40 ... +104 °F) temperature class T6 -40 ... +100 °C (-40 ... +212 °F) temperature class T4 -40 ... +70 °C (-40 ... +158 °F) temperature class T6 To a circuit with the operating values: $U_n = 10.5$ to 30 V, 4 ... 20 mA
<ul style="list-style-type: none"> <li>Explosion protection acc. to FM           <ul style="list-style-type: none"> <li>Marking (XP/DIP) or IS; NI; S</li> </ul> </li> </ul>	Available soon CL I, DIV 1, GP ABCD T4 ... T6; CL II, DIV 1, GP EFG; CL III; Ex ia IIC T4 ... T6: CL I, DIV 2, GP ABCD T4 ... T6; CL II, DIV 2, GP FG; CL III
<ul style="list-style-type: none"> <li>Explosion protection according to CSA           <ul style="list-style-type: none"> <li>Marking (XP/DIP) or (IS)</li> </ul> </li> </ul>	Available soon CL I, DIV 1, GP ABCD T4 ... T6; CL II, DIV 1, GP EFG; CL III; Ex ia IIC T4 ... T6: CL I, DIV 2, GP ABCD T4 ... T6; CL II, DIV 2, GP FG; CL III
NAMUR recommendations <ul style="list-style-type: none"> <li>NE 06</li> <li>NE 21</li> <li>NE 23</li> <li>NE 43</li> <li>NE 53</li> <li>NE 80</li> <li>NE 105</li> <li>NE 107</li> <li>NE 131</li> </ul>	Standardized Electrical Signals and Questions Relating to Engineering Technology Electromagnetic Compatibility (EMC) of Industrial Process and Laboratory Control Equipment Extra Low Voltage Circuits with Safe Separation Standardization of the Signal Level for the Failure Information of Digital Transmitters Software and Hardware of Field Devices and Signal Processing Devices with Digital Electronics The Application of the Pressure Equipment Directive to Process Control Devices Specifications for Integrating Fieldbus Devices in Engineering Tools for Field Devices Self-Monitoring and Diagnosis of Field Devices NAMUR Standard Device - Field Devices for Standard Applications

1) Han 8D is identical to Han 8U.

### HART communication

HART	230 ... 1100 Ω
Protocol	HART 7
Software for computer	SIMATIC PDM

## Selection and ordering data

	Article No.
<b>Pressure transmitters for absolute pressure (pressure series)</b>	
<b>SITRANS P320</b>	➤ 7MF0320 - - - - -
<b>SITRANS P420</b>	➤ 7MF0420 - - - - -
➤ Click on the Article no. for the online configuration in the PIA Life Cycle Portal.	
<b>Communication</b>	
HART, 4 ... 20 mA	0
<b>Measuring cell filling</b>	
Silicone oil	1
Inert filling liquid	3
<b>Maximum measuring span</b>	
250 mbar a (100.5 inH <sub>2</sub> O a)	F
1 300 mbar a (522 inH <sub>2</sub> O a)	L
5000 mbar a (72.5 psi a)	P
30 bar a (435 psi a)	R
160 bar a (2 321 psi a)	V
400 bar a (5 802 psi a)	W
700 bar a (10 153 psi a)	X
<b>Process connection</b>	
Male thread M20 x 1.5	B
Male thread G½ (DIN EN 837-1)	D
Female thread ½-14 NPT	E
Male thread ½-14 NPT	F
Oval flange, mounting thread: 7/16-20 UNF (IEC 61518)	G
Oval flange, mounting thread: M10 (DIN 19213)	H
Oval flange, mounting thread: M12 (DIN 19213)	J
Version for diaphragm seal pressure	U
<b>Wetted parts materials: Process connection, seal diaphragm</b>	
Stainless steel 316L/1.4404, stainless steel 316L/1.4404	0
Stainless steel 316L/1.4404, alloy C276/2.4819	1
Alloy C22/2.4602, alloy C276/2.4819	2
<b>Non-wetted parts materials</b>	
Die-cast aluminum	1
Stainless steel precision casting CF3M/1.4409 similar to 316L	2
<b>Enclosure</b>	
Dual chamber device	5
<b>Type of protection</b>	
Without Ex	A
Intrinsic safety	B
Flameproof enclosure	C
Flameproof enclosure, intrinsic safety	D
Dust protection by enclosure Zone 21/22 (DIP), increased safety Zone 2	L
Dust protection by enclosure Zone 20/21/22 (DIP), increased safety Zone 2	M
Combination of options B, C and L (zone model)	S
Combination of options B, C and M (zone model, Class Division)	T
<b>Electrical connections/cable entries</b>	
Thread for cable gland: Cable gland must be ordered separately as option (Axx)	
• 2 x M20 x 1.5	F
• 2 x ½-14 NPT	M
<b>Local operation/display</b>	
Without display (cover closed)	0
With display (cover closed)	1
With display (cover with glass pane)	2



# Pressure Measurement

Pressure transmitters

for applications with advanced requirements (Advanced)

SITRANS P320/P420

for absolute pressure (pressure series)

1

## Selection and ordering data

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Cable glands included</b>	
Plastic	<b>A00</b>
Metal	<b>A01</b>
Stainless steel	<b>A02</b>
Stainless steel 316L/1.4404	<b>A03</b>
CMP, for XP devices	<b>A10</b>
CAPRI ADE 4F, CuZn, cable inner diameter 7 ... 12 mm, cable outer diameter 10 ... 16 mm	<b>A11</b>
CAPRI ADE 4F, stainless steel, cable inner diameter 7 ... 12 mm, cable outer diameter 10 ... 16 mm	<b>A12</b>
<b>Device plug Han mounted left</b>	
Device plug Han 7D (plastic, straight)	<b>A30</b>
Device plug Han 7D (plastic, angled)	<b>A31</b>
Device plug Han 7D (metal, straight)	<b>A32</b>
Device plug Han 7D (metal, angled)	<b>A33</b>
Device plug Han 8D (plastic, straight)	<b>A34</b>
Device plug Han 8D (plastic, angled)	<b>A35</b>
Device plug Han 8D (metal, straight)	<b>A36</b>
Device plug Han 8D (metal, angled)	<b>A37</b>
<b>Cable socket included</b>	
Plastic, for device plug Han 7D and Han 8D	<b>A40</b>
Metal, for device plug Han 7D and Han 8D	<b>A41</b>
<b>Device plug M12 mounted left</b>	
Stainless steel, without cable socket	<b>A62</b>
Stainless steel, with cable socket	<b>A63</b>
<b>Cable entry/connector mounting</b>	
2x sealing plugs M20 x 1.5, IP66/68 installed on both sides	<b>A90</b>
2x sealing plugs ½-14 NPT, IP66/68 installed on both sides	<b>A91</b>
Cable gland/connector mounted left	<b>A97</b>
Cable gland/connector mounted on right	<b>A99</b>
<b>Nameplate labeling (standard labeling: English, unit bar)</b>	
German (bar)	<b>B11</b>
French (bar)	<b>B12</b>
Spanish (bar)	<b>B13</b>
Italian (bar)	<b>B14</b>
Chinese (bar)	<b>B15</b>
Russian (bar)	<b>B16</b>
English (psi)	<b>B20</b>
English (Pa)	<b>B30</b>
Chinese (Pa)	<b>B35</b>
<b>Certificates</b>	
Quality test certificate, 5-point factory calibration (IEC 60770-2)	<b>C11</b>
Inspection certificate (EN 10204-3.1) - Material of pressurized and wetted parts	<b>C12</b>
Factory certificate - NACE (MR 0103-2012 and MR 0175-2009))	<b>C13</b>
Factory certificate (EN 10204-2.2) - Wetted parts	<b>C14</b>
Inspection certificate (EN 10204-3.1) - PMI test of pressurized and wetted parts	<b>C15</b>
<b>Certificates for functional safety</b>	
Functional safety (IEC 61508) - SIL2/3	<b>C20</b>

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Device options</b>	
PDF file with device settings	<b>D10</b>
Double layer coating (epoxy resin and polyurethane) 120 µm of enclosure and cover	<b>D20</b>
FVMQ enclosure sealing	<b>D21</b>
IP66/IP68 degree of protection (not for device plugs M12 and Han )	<b>D30</b>
TAG label empty	<b>D40</b>
Without labeling of the measuring range on the TAG label	<b>D41</b>
Stainless steel Ex plate 1.4404/316L	<b>D42</b>
Overvoltage protection up to 6 kV (external)	<b>D71</b>
Adhesive labels on transport packaging (supplied by customer)	<b>D90</b>
<b>General approval without Ex approval</b>	
Worldwide (CE, RCM) except EAC, FM, CSA, KCC	<b>E00</b>
Worldwide (CE, RCM, EAC, FM, CSA, KCC)	<b>E01</b>
CSA (USA and Canada)	<b>E06</b>
EAC	<b>E07</b>
FM	<b>E08</b>
KCC	<b>E09</b>
Export approval CPA (China)	<b>E12</b>
<b>Explosion protection approvals</b>	
ATEX (Europe)	<b>E20</b>
CSA (USA and Canada)	<b>E21</b>
FM (USA and Canada)	<b>E22</b>
IECEx (Worldwide)	<b>E23</b>
EACEx (GOST-R, -K, -B)	<b>E24</b>
INMETRO (Brazil)	<b>E25</b>
KCs (Korea)	<b>E26</b>
NEPSI (China)	<b>E27</b>
PESO (India)	<b>E28</b>
UKR Sepro (Ukraine)	<b>E30</b>
ATEX (Europe) and IECEx (Worldwide)	<b>E47</b>
CSA (Canada) and FM (USA)	<b>E48</b>
ATEX (Europe) and IECEx (Worldwide) + CSA (Canada) and FM (USA)	<b>E49</b>
<b>Marine approvals</b>	
DNV-GL (Det Norske Veritas/Germanischer Lloyd)	<b>E50</b>
LR (Lloyds Register)	<b>E51</b>
BV (Bureau Veritas)	<b>E52</b>
ABS (American Bureau of Shipping)	<b>E53</b>
RMR (Russian Maritime Register)	<b>E55</b>
KR (Korean Register of Shipping)	<b>E56</b>
RINA (Registro Italiano Navale)	<b>E57</b>
CCS (China Classification Society)	<b>E58</b>
<b>Country-specific approvals</b>	
CRN approval Canada (Canadian Registration Number)	<b>E60</b>

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for absolute pressure (pressure series)

1

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Special approvals</b>	
Oxygen application (with inert liquid, max. 100 bar (1 450 psi) at 60° C (140 °F))	<b>E80</b>
Dual seal	<b>E81</b>
WRC / WRAS (drinking water); only with pressure cap O-rings made of EPDM	<b>E83</b>
NSF61 (drinking water)	<b>E84</b>
ACS (drinking water)	<b>E85</b>
<b>Mounting bracket</b>	
Steel, galvanized	<b>H01</b>
Stainless steel 1.4301/304	<b>H02</b>
Stainless steel 1.4404/316L	<b>H03</b>
<b>Flange connections with flange EN 1092-1</b>	
With flange adapter G½ Form B1	
• DN 25 PN 40, stainless steel 1.4571/316Ti	<b>J80</b>
• DN 50 PN 40, stainless steel 1.4571/316Ti	<b>J81</b>
• DN 80 PN 40, stainless steel 1.4571/316Ti	<b>J82</b>
With siphon G½ Form B1	
• DN 25 PN 40, stainless steel 1.4571/316Ti	<b>J83</b>
• DN 50 PN 40, stainless steel 1.4571/316Ti	<b>J84</b>
• DN 80 PN 40, stainless steel 1.4571/316Ti	<b>J85</b>
• DN 25 PN 100, stainless steel 1.4571/316Ti	<b>J86</b>
<b>Process flanges, gaskets (instead of standard gaskets FKM (FPM))</b>	
Seal (EN 837-1) material Fe (soft iron)	<b>K60</b>
Seal (EN 837-1) material 1.4571	<b>K61</b>
Seal (EN 837-1) material Cu	<b>K62</b>
<b>Process connection</b>	
Process connection male thread G½, bore hole 11 mm	<b>K80</b>
<b>Shut-off valves, valve manifolds</b>	
With mounted valve manifold 7MF9011-4EA, process connection at transmitter G½ shank, PTFE sealing ring and pressure test certified in factory certificate (EN 10204-2.2)	<b>T02</b>
With mounted valve manifold 7MF9011-4FA, process connection at transmitter female thread ½-14 NPT, sealing tape. With PTFE sealing ring and pressure test certified in factory certificate (EN 10204-2.2)	<b>T03</b>
With mounted valve manifold 7MF9411-5AA, process connection at transmitter oval flange with PTFE gasket, steel mounting screws, pressure test certified in factory certificate (EN 10204-2.2)	<b>T05</b>
With mounted valve manifold 7MF9411-5AA, process connection at transmitter oval flange with PTFE gasket, stainless steel mounting screws, pressure test certified in factory certificate (EN 10204-2.2)	<b>T06</b>

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Device settings</b>	
Measuring span Lower range value (max. 5 characters), upper range value (max. 5 characters), unit [mbar, bar, kPa, MPa, psi, ...], example: -0.5 ... 10.5 psi	<b>Y01</b>
Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).	
Drop-down list: Pa, MPa, kPa, hPa, bar, mbar, psi, g/cm², kg/cm², kgf/cm², inH₂O, inH₂O (4°C), ftH₂O, mmH₂O, mmH₂O (4°C), mH₂O (4°C), mmHg, inHg, atm, torr	
TAG (on stainless steel plate and device parameters, max. 32 characters)	<b>Y15</b>
Input field: Free text, max. 32 characters	
Measuring point description (on stainless steel plate and device parameters, max. 32 characters)	<b>Y16</b>
Input field: Free text, max. 32 characters	
TAG short (device parameters, max. 8 characters)	<b>Y17</b>
Input field: Free text, max. 8 characters	
Local display [Pressure, Percent], reference [None, Absolute, Relative], example: Pressure gauge	<b>Y21</b>
Drop-down list: Percent, pressure unit, pressure unit abs., pressure unit gauge	
Local display Scaling with standard units [m³/s, l/s, m, inch, ...], example 1 ... 5 m	<b>Y22</b>
Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).	
Drop-down list: m, cm, mm, in, ft, m³, l, hl, in³, ft³, yd³, gal, gal (UK), bu, bbl, bbl (US), SCF, Nm³, NI.	
Local display Scaling with user-specific units (max. 12 characters), example 1 ... 5 m	<b>Y23</b>
Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).	
Input field 3: Free text, max. 8 characters	
Saturation limits instead of 3.8 ... 20.5 mA, example: 3.8 ... 22.0 mA	<b>Y30</b>
Drop-down list 1: 3.9, 4	
Drop-down list 2: 20.8, 22	
Fault current instead of 3.6 mA [22.5 mA, 22.8 mA]	<b>Y31</b>
Drop-down list: 3.75; 21.75; 22.5; 22.6	
Damping in seconds instead of 2 s (0.0 ... 100.0 s)	<b>Y32</b>
Input field: max. 4 characters and numbers only; decimal places as dot (comma is automatically converted to dot); min. value = 0; max. value = 100.	
ID number of special version	<b>Y99</b>
Input field: max. 4 characters and only natural numbers from 0 ... 9999	

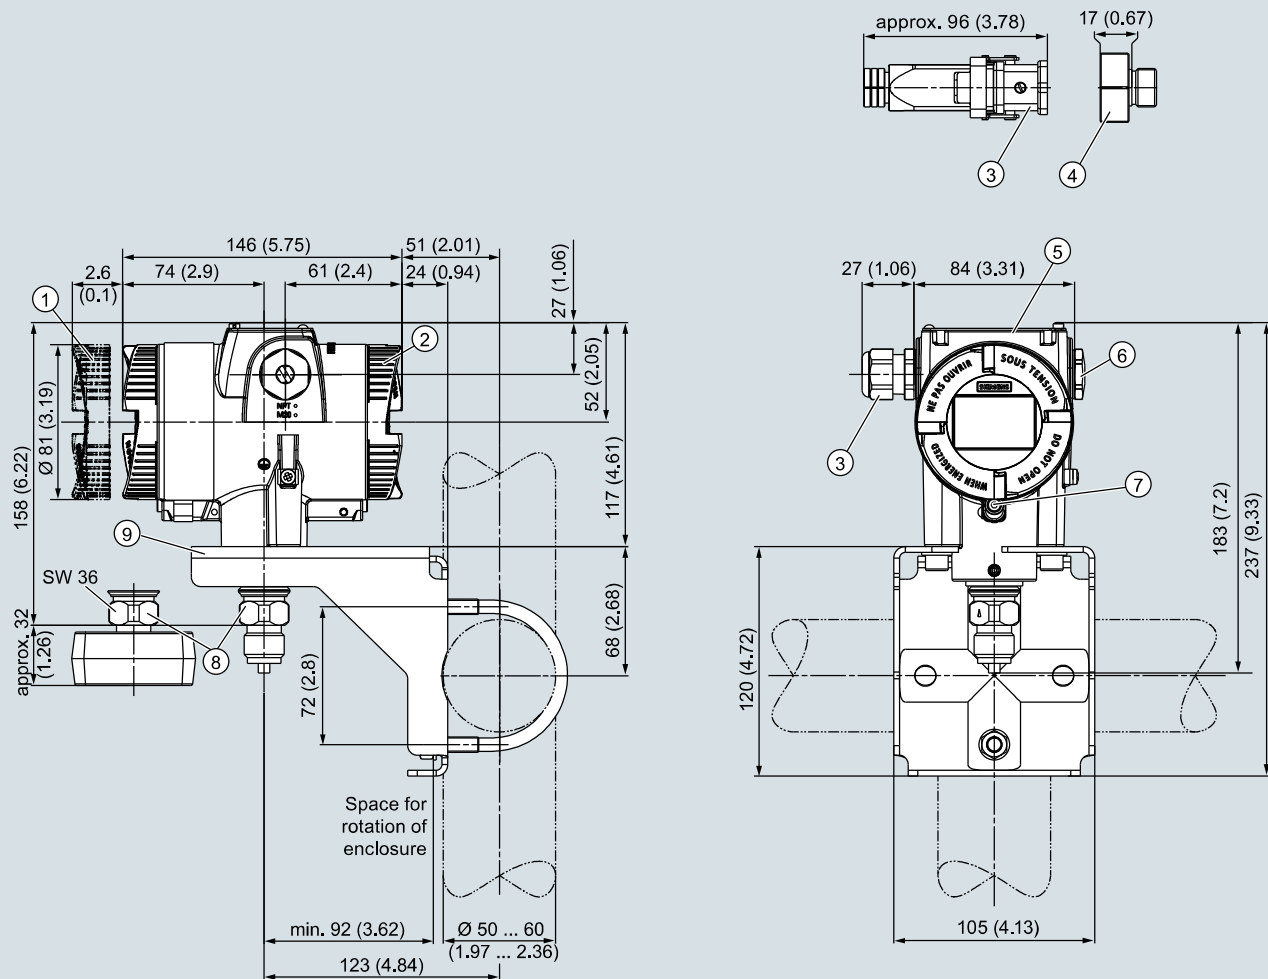
# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for absolute pressure (pressure series)

1

## Dimensional drawings



① Electronics side, local display  
(longer overall length for cover with glass pane)<sup>1)</sup>

② Connection side

③ Electrical connection:

- M20 x 1.5<sup>3)</sup> screw gland
- ½-14 NPT screw gland
- Han 7D/Han 8D<sup>2) 3)</sup> device plug
- M12 device plug<sup>2) 3)</sup>

④ Harting adapter

⑤ Cover over buttons and nameplate  
with general information

⑥ Blanking plug

⑦ Safety catch

(only for "flameproof enclosure" type of protection)

⑧ Process connection: G½B connection pin or oval flange

⑨ Mounting bracket (optional)

<sup>1)</sup> In addition, allow approx. 22 mm (0.87 inch) for the thread length when removing the covers

<sup>2)</sup> Not with "flameproof enclosure" type of protection

<sup>3)</sup> Not with type of protection "FM + CSA" [is + XP]

SITRANS P320/P420 pressure transmitter for absolute pressure (pressure series), dimensions in mm (inch)

## Technical specifications

## SITRANS P320 / SITRANS P420 for absolute pressure (differential pressure series)

## Input

Measured variable	Absolute pressure		
Measuring span (infinitely adjustable) and maximum operating pressure (pursuant to Pressure Equipment Directive 2014/68/EU)	Measuring span	Max. permissible operating pressure MAWP (PS)	Maximum permissible test pressure
	8.3 ... 250 mbar a	160 bar a	240 bar a
	0.83 ... 25 kPa a	16 MPa a	24 MPa a
	3.3 ... 100.5 inH <sub>2</sub> O a	2320 psi a	3481 psi a
	43 ... 1300 mbar a	160 bar a	240 bar a
	4.3 ... 130 kPa a	16 MPa a	24 MPa a
	17.3 ... 522 inH <sub>2</sub> O a	2320 psi a	3481 psi a
	166 ... 5000 mbar a	160 bar a	240 bar a
	16.6 ... 500 kPa a	16 MPa a	24 MPa a
	2.41 ... 72.5 psi a	2320 psi a	3481 psi a
	1 ... 30 bar a	160 bar a	240 bar a
	0.1 ... 3 MPa a	16 MPa a	24 MPa a
	14.5 ... 435 psi a	2320 psi a	3481 psi a
	5 ... 100 bar a	160 bar a	240 bar a
	0.5 ... 10 MPa a	16 MPa a	24 MPa a
	76.9 ... 1450 psi a	2320 psi a	3481 psi a
Measuring limits	0 mbar a/kPa a/psi a		
• Low measuring limit	For temperature of medium -20 °C < $\vartheta$ ≤ +60 °C (-4 °F < $\vartheta$ ≤ +140 °F)		
- Measuring cell with silicone oil filling	30 mbar a/3 kPa a/0.44 psi a		
- Measuring cell with inert liquid	For temperature of medium 60 °C < $\vartheta$ ≤ +100 °C (max. 85 °C for measuring cell 30 bar) (140 °F < $\vartheta$ ≤ +212 °F (max. 185 °F for measuring cell 435 psi))		
	30 mbar a + 20 mbar a · ( $\vartheta$ - 60 °C)/°C		
	3 kPa a + 2 kPa a · ( $\vartheta$ - 60 °C)/°C		
	0.44 psi a + 0.29 psi a · ( $\vartheta$ - 140 °F)/°F		
• Upper measuring limit	100% of the max. measuring span (for oxygen measurement max. 100 bar/10 MPa/ 1450 psi and 60 °C (140 °F) ambient temperature/temperature of medium)		
• Lower range value	Between the measuring limits (infinitely adjustable)		

## Output

Output signal	4 ... 20 mA		
• Low saturation limit (infinitely adjustable)	3.55 mA, factory preset to 3.8 mA		
• High saturation limit (infinitely adjustable)	22.8 mA, factory-set to 20.5 mA or optionally 22.0 mA		
• Ripple (without HART communication)	$I_{pp} \leq 0.5\%$ of max. output current		
Adjustable damping	0 ... 100 s, continuously adjustable over remote operation		
	0 ... 100 s, in increments of 0.1 s, adjustable over display		
• Current transmitter	3.55 ... 22.8 mA		
• Failure signal	3.55 ... 22.8 mA		
Load	Resistor R [Ω]		
• Without HART communication	$R = (U_H - 10.5 \text{ V})/22.8 \text{ mA}$ , $U_H$ : Power supply in V		
• With HART communication	$R = 230 \dots 1100 \Omega$ (HART communicator (handheld)) $R = 230 \dots 500 \Omega$ (SIMATIC PDM)		
Characteristic curve	<ul style="list-style-type: none"> <li>• Linearly increasing or linearly decreasing</li> <li>• Linear increase or decrease or according to the square root (only for differential pressure and flow)</li> </ul>		
Physical bus	-		
Polarity-independent	-		

## Measuring accuracy

Reference conditions	<ul style="list-style-type: none"> <li>• According to EN 60770-1</li> <li>• Rising characteristic curve</li> <li>• Lower range value 0 bar/kPa/psi</li> <li>• Seal diaphragm stainless steel</li> <li>• Measuring cell with silicone oil filling</li> <li>• Room temperature 25 °C (77 °F)</li> </ul>
----------------------	---

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for absolute pressure (differential pressure series)

1

## SITRANS P320 / SITRANS P420 for absolute pressure (differential pressure series)

Conformity error at limit point setting, including hysteresis and repeatability

Measuring span ratio  $r$  (spread, Turn-Down)

- Linear characteristic (all measuring cells)
  - $r \leq 10$
  - $10 < r \leq 30$

Influence of ambient temperature  
(in % per 28 °C (50 °F))

- 250 mbar a/25 kPa a/3.6 psi a
- 1300 mbar a/130 kPa a/18.8 psi a
- 5 bar a/500 kPa a/72.5 psi a
- 30 bar a/3000 kPa a/435 psi a
- 100 bar a/10 MPa a/1450 psi a

Long-term stability at  $\pm 30$  °C ( $\pm 54$  °F)

Step response time  $T_{63}$  (without electrical damping)

- 250 mbar a/25 kPa a/3.6 psi a
- 1300 mbar a/130 kPa a/18.8 psi a
- 5 bar a/500 kPa a/72.5 psi a
- 30 bar a/3000 kPa a/435 psi a
- 100 bar a/10 MPa a/1450 psi a

Effect of mounting position (in pressure per change of angle)

Effect of auxiliary power (in % per voltage change)

$r$  = maximum measuring span/set measuring span or nominal measuring range

$\leq 0.1\%$

$\leq 0.2\%$

$\leq (0.15 \cdot r + 0.1)\%$

$\leq (0.08 \cdot r + 0.16)\%$

In 5 years  $\leq (0.25 \cdot r)\%$

Approx. 0.195 s

Approx. 0.145 s

$\leq 0.7$  mbar/0.07 kPa/0.010 psi per 10° incline  
(zero offset is possible with position error compensation)

0.005% per 1 V

### Operating conditions

Temperature of medium

- Measuring cell with silicone oil filling
  - Measuring cell 30 bar (435 psi)
  - Measuring cell 100 bar (1450 psi)
- Measuring cell with inert oil
- In conjunction with dust explosion protection

Ambient conditions

- Ambient temperature/enclosure
  - Measuring cell with silicone oil filling
  - Measuring cell with inert oil
  - Display
- Storage temperature
- Climatic class in accordance with IEC 60721-3-4
- Degree of protection
  - According to IEC 60529
  - According to NEMA 250
- Electromagnetic compatibility
  - Emitted interference and interference immunity

-40 ... +100 °C (-40 ... +212 °F)

-20 ... +100 °C (-4 ... +212 °F)

-20 ... +100 °C (-4 ... +212 °F)

-20 ... +100 °C (-4 ... +212 °F)

-40 ... +85 °C (-4 ... +185 °F)

Observe the temperature class in areas subject to explosion hazard.

-40 ... +85 °C (-40 ... +185 °F)

-40 ... +85 °C (-40 ... +185 °F)

-20 ... +80 °C (-4 ... +176 °F)

-50 ... +85 °C (-58 ... +185 °F); with FDA-compliant oil: -20 ... +85 °C (-4 ... +185 °F))

4K4H

IP66, IP68

Type 4X

According to IEC 61326 and NAMUR NE 21

### Design

Weight

Approx. 3.9 kg (8.5 lb) with aluminum enclosure

Approx. 5.8 kg (12.7 lb) with stainless steel enclosure

Material

- Wetted parts materials
  - Seal diaphragm
  - Process flanges and sealing plugs
  - O-ring
- Non-wetted parts materials
  - Electronics enclosure
  - Pressure flange screws
  - Mounting bracket

Stainless steel, mat. no. 1.4404/316L, Alloy C276, mat. no. 2.4819, Monel, mat. no. 2.4360, tantalum or gold

Stainless steel, mat. no. 1.4408 to PN 160, mat. no. 1.4571/316Ti for PN 420, Alloy C22, 2.4602 or Monel, mat. no. 2.4360

FPM (Viton) or optionally: PTFE, FEP, FEPM and NBR

- Low-copper die-cast aluminum GD-AISI 12 or stainless steel precision casting, mat. no. 1.4409/ CF-3M

- Standard: Powder coating with polyurethane

Option: 2 coats: Coat 1: epoxy-based; coat 2: Polyurethane

- Stainless steel type plate (1.4404/316L)

Stainless steel ISO 3506-1 A4-70

Steel, electrogalvanized steel, or stainless steel

Process connection

1/4-18 NPT female thread and flat connection with 7/16-20 UNF fastening screw thread in accordance with EN 61518 or M10 fastening screw thread in accordance with DIN 19213 (M12 for PN 420 (MWP 6092 psi))

Electrical connection

Screw terminals

Cable entry via the following screwed glands:

- M20 x 1.5
- 1/2-14 NPT
- Device plug Han 7D/Han 8D<sup>1)</sup>
- Device plug M12

**SITRANS P320 / SITRANS P420 for absolute pressure (differential pressure series)****Displays and controls**

Keys	4 keys for operation directly on the device
Display	<ul style="list-style-type: none"> <li>• With or without integrated display (optional)</li> <li>• Cover with inspection window (optional)</li> </ul>

**Auxiliary power  $U_H$** 

Terminal voltage on pressure transmitter	10.5 ... 45 V DC 10.5 ... 30 V DC in intrinsically safe mode
Ripple	$U_{SS} \leq 0.2 \text{ V}$ (47 ... 125 Hz)
Noise	$U_{eff} \leq 1.2 \text{ mV}$ (0.5 ... 10 kHz)
Auxiliary power	–
Separate supply voltage	–

**Certificates and approvals**

Classification according to pressure equipment directive (PED 2014/68/EU)	For gases of fluid group 1 and liquids of fluid group 1; complies with requirements of article 4, paragraph 3 (sound engineering practice)
Drinking water	
• WRAS (England)	No.: 1903094 (option E83)
• ACS (France)	No.: 18 ACC LY 277 (option E85)
• NSF (USA)	No.: 20180920-MH61350 (option E84)
CRN (Canada)	No.: 0F9863.5C (option E60)
Explosion protection acc. to NEPSI (China)	No.: GYJ19.1058X (option E27)
Explosion protection acc. to INMETRO (Brazil)	No.: BRA-18-GE-0035X (option E25)
Explosion protection	
• Intrinsic safety "i"	
- Marking	II 1/2 G Ex ia/ib IIC T4/T6 Ga/Gb
- Permissible ambient temperature	-40 ... +80 °C (-40 ... +176 °F) temperature class T4 -40 ... +70 °C (-40 ... +158 °F) temperature class T6
- Permissible temperature of measuring medium	-40 ... +100 °C (-40 ... +212 °F) temperature class T4 -40 ... +70 °C (-40 ... +158 °F) temperature class T6
- Connection	To certified intrinsically safe circuits with peak values: $U_i = 30 \text{ V}$ , $I_i = 101 \text{ mA}$ , $P_i = 760 \text{ mW}$ $U_i = 29 \text{ V}$ , $I_i = 110 \text{ mA}$ , $P_i = 800 \text{ mW}$ $L_i = 0.24 \text{ } \mu\text{H}/C_i = 3.29 \text{ nF}$
- Effective internal inductance/capacitance	
• Flameproof enclosure "d"	
- Marking	Ex II 1/2 G Ex ia/db IIC T4/T6 Ga/Gb
- Permissible ambient temperature	-40 ... +80 °C (-40 ... +176 °F) temperature class T4 -40 ... +70 °C (-40 ... +158 °F) temperature class T6
- Permissible temperature of measuring medium	-40 ... +100 °C (-40 ... +212 °F) temperature class T4 -40 ... +70 °C (-40 ... +158 °F) temperature class T6
- Connection	To a circuit with the operating values: $U_n = 10.5 \text{ to } 45 \text{ V}$ , $4 \text{ ... } 20 \text{ mA}$
• Dust explosion protection for zones 21, 22	
- Marking	Ex II 2D Ex tb IIIC T120 °C Db Ex II 3D Ex tc IIIC T120 °C Dc
- Permissible ambient temperature	-40 ... +80 °C (-40 ... +176 °F)
- Permissible temperature of measuring medium	-40 ... +100 °C (-40 ... +212 °F)
- Max. surface temperature	120 °C (248 °F)
- Connection	To a circuit with the operating values: $U_n = 10.5 \text{ to } 45 \text{ V}$ , $4 \text{ ... } 20 \text{ mA}$
• Dust explosion protection for zones 20, 21, 22	
- Marking	Ex II 1D Ex ia IIIC T120 °C Da Ex II 2D Ex ib IIIC T120 °C Db
- Permissible ambient temperature	-40 ... +80 °C (-40 ... +176 °F)
- Permissible temperature of measuring medium	-40 ... +100 °C (-40 ... +212 °F)
- Connection	To certified intrinsically safe circuits with the peak values: $U_i = 30 \text{ V}$ , $I_i = 101 \text{ mA}$ , $P_i = 760 \text{ mW}$ $U_i = 29 \text{ V}$ , $I_i = 110 \text{ mA}$ , $P_i = 800 \text{ mW}$ $L_i = 0.24 \text{ } \mu\text{H}/C_i = 3.29 \text{ nF}$
- Effective internal inductance/capacitance	

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for absolute pressure (differential pressure series)

1

## SITRANS P320 / SITRANS P420 for absolute pressure (differential pressure series)

<ul style="list-style-type: none"> <li>Type of protection for Zone 2           <ul style="list-style-type: none"> <li>- Marking</li> <li>- Permissible ambient temperature "ec"</li> <li>- Permissible temperature of measuring medium</li> <li>- "ec" connection</li> </ul> </li> <li>Explosion protection acc. to FM           <ul style="list-style-type: none"> <li>- Marking (XP/DIP) or IS; NI; S</li> </ul> </li> <li>Explosion protection according to CSA           <ul style="list-style-type: none"> <li>- Marking (XP/DIP) or (IS)</li> </ul> </li> </ul>	<p>Ex II 3G Ex ec IIC T4/T6 Gc</p> <p>-40 ... +80 °C (-40 ... +176 °F) temperature class T4</p> <p>-40 ... +40 °C (-40 ... +104 °F) temperature class T6</p> <p>-40 ... +100 °C (-40 ... +212 °F) temperature class T4</p> <p>-40 ... +70 °C (-40 ... +158 °F) temperature class T6</p> <p>To a circuit with the operating values:</p> <p><math>U_n = 10,5</math> to 30 V, 4 ... 20 mA</p> <p>Available soon</p> <p>CL I, DIV 1, GP ABCD T4 ... T6; CL II, DIV 1, GP EFG; CL III; Ex ia IIC T4 ... T6: CL I, DIV 2, GP ABCD T4 ... T6; CL II, DIV 2, GP FG; CL III</p> <p>Available soon</p> <p>CL I, DIV 1, GP ABCD T4 ... T6; CL II, DIV 1, GP EFG; CL III; Ex ia IIC T4 ... T6: CL I, DIV 2, GP ABCD T4 ... T6; CL II, DIV 2, GP FG; CL III</p>
NAMUR recommendations	
<ul style="list-style-type: none"> <li>NE 06</li> <li>NE 21</li> <li>NE 23</li> <li>NE 43</li> <li>NE 53</li> <li>NE 80</li> <li>NE 105</li> <li>NE 107</li> <li>NE 131</li> </ul>	<p>Standardized Electrical Signals and Questions Relating to Engineering Technology</p> <p>Electromagnetic Compatibility (EMC) of Industrial Process and Laboratory Control Equipment</p> <p>Extra Low Voltage Circuits with Safe Separation</p> <p>Standardization of the Signal Level for the Failure Information of Digital Transmitters</p> <p>Software and Hardware of Field Devices and Signal Processing Devices with Digital Electronics</p> <p>The Application of the Pressure Equipment Directive to Process Control Devices</p> <p>Specifications for Integrating Fieldbus Devices in Engineering Tools for Field Devices</p> <p>Self-Monitoring and Diagnosis of Field Devices</p> <p>NAMUR Standard Device - Field Devices for Standard Applications</p>

<sup>1)</sup> Han 8D is identical to Han 8U.

### HART communication

HART	230 ... 1100 Ω
Protocol	HART 7
Software for computer	SIMATIC PDM

## Selection and ordering data

	Article No.
<b>Pressure transmitters for absolute pressure (differential pressure series)</b>	
<b>SITRANS P320</b>	➤ 7MF033 - - - - -
<b>SITRANS P420</b>	➤ 7MF043 - - - - -
➤ Click on the Article no. for the online configuration in the PIA Life Cycle Portal.	
<b>Communication</b>	
HART, 4 ... 20 mA	0
<b>Measuring cell filling</b>	
Silicone oil	1
Inert filling liquid	3
<b>Maximum measuring span</b>	
250 mbar a (100.5 inH <sub>2</sub> O a)	G
1 300 mbar a (522 inH <sub>2</sub> O a)	L
5000 mbar a (72.5 psi a)	P
30 bar a (435 psi a)	R
100 bar a (1450 psi a)	U
<b>Process connection</b>	
Oval flange, mounting thread: 7/16"-20 UNF (IEC 61518)	Q
Oval flange, mounting thread: M10 (DIN 19213)	R
Oval flange, mounting thread: 7/16"-20 UNF (IEC 61518) with lateral ventilation	S
Oval flange, mounting thread: M10 (DIN 19213) with lateral ventilation	T
Version for diaphragm seal with mounting thread 7/16"-20 UNF (IEC 61518)	V
Version for diaphragm seal with mounting thread M10 (DIN 19213)	W
<b>Wetted parts materials: Process connection, seal diaphragm</b>	
Stainless steel 316L/1.4404, stainless steel 316L/1.4404, process flange stainless steel 316/1.4408	0
Stainless steel 316L/1.4404, alloy C276/2.4819, process flange stainless steel 316/1.4408	1
Alloy C22/2.4602, alloy C276/2.4819, process flange stainless steel 316/1.4408	2
Tantalum/tantalum, process flange stainless steel 316/1.4408	4
Monel 00/2.4360, Monel 400/2.4360, process flange stainless steel 316/1.4408	6
Stainless steel 316L/1.4404, gold-plated, process flange stainless steel 316/1.4408	8
<b>Non-wetted parts materials</b>	
Die-cast aluminum	1
Stainless steel precision casting CF3M/1.4409 similar to 316L	2
<b>Enclosure</b>	
Dual chamber device	5
<b>Type of protection</b>	
Without Ex	A
Intrinsic safety	B
Flameproof enclosure	C
Flameproof enclosure, intrinsic safety	D
Dust protection by enclosure Zone 21/22 (DIP), increased safety Zone 2	L
Dust protection by enclosure Zone 20/21/22 (DIP), increased safety Zone 2	M
Combination of options B, C and L (zone model)	S
Combination of options B, C and M (zone model, Class Division)	T
<b>Electrical connections/cable entries</b>	
Thread for cable gland: Cable gland must be ordered separately as option (Axx)	
• 2 x M20 x 1.5	F
• 2 x 1/2"-14 NPT	M
<b>Local operation/display</b>	
Without display (cover closed)	0
With display (cover closed)	1
With display (cover with glass pane)	2



# Pressure Measurement

Pressure transmitters

for applications with advanced requirements (Advanced)

SITRANS P320/P420

for absolute pressure (differential pressure series)

1

## Selection and ordering data

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Cable glands included</b>	
Plastic	<b>A00</b>
Metal	<b>A01</b>
Stainless steel	<b>A02</b>
Stainless steel 316L/1.4404	<b>A03</b>
CMP, for XP devices	<b>A10</b>
CAPRI ADE 4F, CuZn, cable inner diameter 7 ... 12 mm, cable outer diameter 10 ... 16 mm	<b>A11</b>
CAPRI ADE 4F, stainless steel, cable inner diameter 7 ... 12 mm, cable outer diameter 10 ... 16 mm	<b>A12</b>
<b>Device plug Han mounted left</b>	
Device plug Han 7D (plastic, straight)	<b>A30</b>
Device plug Han 7D (plastic, angled)	<b>A31</b>
Device plug Han 7D (metal, straight)	<b>A32</b>
Device plug Han 7D (metal, angled)	<b>A33</b>
Device plug Han 8D (plastic, straight)	<b>A34</b>
Device plug Han 8D (plastic, angled)	<b>A35</b>
Device plug Han 8D (metal, straight)	<b>A36</b>
Device plug Han 8D (metal, angled)	<b>A37</b>
<b>Cable socket included</b>	
Plastic, for device plug Han 7D and Han 8D	<b>A40</b>
Metal, for device plug Han 7D and Han 8D	<b>A41</b>
<b>Device plug M12 mounted left</b>	
Stainless steel, without cable socket	<b>A62</b>
Stainless steel, with cable socket	<b>A63</b>
<b>Cable entry/connector mounting</b>	
2x sealing plugs M20 x 1.5, IP66/68 installed on both sides	<b>A90</b>
2x sealing plugs ½-14 NPT, IP66/68 installed on both sides	<b>A91</b>
Cable gland/connector mounted left	<b>A97</b>
Cable gland/connector mounted on right	<b>A99</b>
<b>Nameplate labeling (standard labeling: English, unit bar)</b>	
German (bar)	<b>B11</b>
French (bar)	<b>B12</b>
Spanish (bar)	<b>B13</b>
Italian (bar)	<b>B14</b>
Chinese (bar)	<b>B15</b>
Russian (bar)	<b>B16</b>
English (psi)	<b>B20</b>
English (Pa)	<b>B30</b>
Chinese (Pa)	<b>B35</b>
<b>Certificates</b>	
Quality test certificate, 5-point factory calibration (IEC 60770-2)	<b>C11</b>
Inspection certificate (EN 10204-3.1) - Material of pressurized and wetted parts	<b>C12</b>
Factory certificate - NACE (MR 0103-2012 and MR 0175-2009)	<b>C13</b>
Factory certificate (EN 10204-2.2) - Wetted parts	<b>C14</b>
Inspection certificate (EN 10204-3.1) - PMI test of pressurized and wetted parts	<b>C15</b>
<b>Certificates for functional safety</b>	
Functional safety (IEC 61508) - SIL2/3	<b>C20</b>

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Device options</b>	
PDF file with device settings	<b>D10</b>
Double layer coating (epoxy resin and polyurethane) 120 µm of enclosure and cover	<b>D20</b>
FVMQ enclosure sealing	<b>D21</b>
IP66/IP68 degree of protection (not for device plugs M12 and Han )	<b>D30</b>
TAG label empty	<b>D40</b>
Without labeling of the measuring range on the TAG label	<b>D41</b>
Stainless steel Ex plate 1.4404/316L	<b>D42</b>
Overvoltage protection up to 6 kV (external)	<b>D71</b>
Adhesive labels on transport packaging (supplied by customer)	<b>D90</b>
<b>General approval without Ex approval</b>	
Worldwide (CE, RCM) except EAC, FM, CSA, KCC	<b>E00</b>
Worldwide (CE, RCM, EAC, FM, CSA, KCC)	<b>E01</b>
CSA (USA and Canada)	<b>E06</b>
EAC	<b>E07</b>
FM	<b>E08</b>
KCC	<b>E09</b>
Export approval CPA (China)	<b>E12</b>
<b>Explosion protection approvals</b>	
ATEX (Europe)	<b>E20</b>
CSA (USA and Canada)	<b>E21</b>
FM (USA and Canada)	<b>E22</b>
IECEx (Worldwide)	<b>E23</b>
EACEx (GOST-R, -K, -B)	<b>E24</b>
INMETRO (Brazil)	<b>E25</b>
KCs (Korea)	<b>E26</b>
NEPSI (China)	<b>E27</b>
PESO (India)	<b>E28</b>
UKR Sepro (Ukraine)	<b>E30</b>
ATEX (Europe) and IECEx (Worldwide)	<b>E47</b>
CSA (Canada) and FM (USA)	<b>E48</b>
ATEX (Europe) and IECEx (Worldwide) + CSA (Canada) and FM (USA)	<b>E49</b>
<b>Marine approvals</b>	
DNV-GL (Det Norske Veritas/Germanischer Lloyd)	<b>E50</b>
LR (Lloyds Register)	<b>E51</b>
BV (Bureau Veritas)	<b>E52</b>
ABS (American Bureau of Shipping)	<b>E53</b>
RMR (Russian Maritime Register)	<b>E55</b>
KR (Korean Register of Shipping)	<b>E56</b>
RINA (Registro Italiano Navale)	<b>E57</b>
CCS (China Classification Society)	<b>E58</b>
<b>Country-specific approvals</b>	
CRN approval Canada (Canadian Registration Number)	<b>E60</b>

Options	Order code
Append "-Z" to Article No., add order code and plain text or entry from drop-down list.	
<b>Special approvals</b>	
Oxygen application (with inert liquid, max. 100 bar (1 450 psi) at 60° C (140 °F))	<b>E80</b>
Dual seal	<b>E81</b>
WRC / WRAS (drinking water); only with pressure cap O-rings made of EPDM	<b>E83</b>
NSF61 (drinking water)	<b>E84</b>
ACS (drinking water)	<b>E85</b>
<b>Mounting bracket</b>	
Steel, galvanized	<b>H01</b>
Stainless steel 1.4301/304	<b>H02</b>
Stainless steel 1.4404/316L	<b>H03</b>
<b>Process flanges; screw plug with vent valve</b>	
Welded in on right	<b>J08</b>
Welded in on left	<b>J09</b>
Glued in on right	<b>J10</b>
Glued in on left	<b>J11</b>
<b>Flange connections with flange EN 1092-1</b>	
Form B1	
• DN 25 PN 40, stainless steel 1.4571/316Ti	<b>J70</b>
• DN 50 PN 40, stainless steel 1.4571/316Ti	<b>J71</b>
• DN 80 PN 40, stainless steel 1.4571/316Ti	<b>J72</b>
• DN 15 PN 40, stainless steel 1.4571/316Ti	<b>J78</b>
Form C	
• DN 25 PN 40, stainless steel 1.4571/316Ti	<b>J73</b>
• DN 50 PN 40, stainless steel 1.4571/316Ti	<b>J74</b>
• DN 80 PN 40, stainless steel 1.4571/316Ti	<b>J75</b>
<b>Flange connection options</b>	
Flange connection and temperature extension	<b>J76</b>
Flange connection with epoxy resin coating	<b>J77</b>
<b>Process flanges; special materials</b>	
Reserved for 7MF7: without process flanges, without screws, without gaskets	<b>K00</b>
Process flange material alloy C22/2.4602	<b>K01</b>
Process flange material Monel 400/2.4360	<b>K02</b>
Process connection material PVDF, on the side ½-14 NPT	<b>K05</b>
Process flanges/process connection material PVDF, flange on the side EN 1092-1 Form B1 DN 25 PN 40, MAWP 4 bar	<b>K06</b>
Process flanges/process connection material PVDF, flange on the side EN 1092-1 Form B1 DN 40 PN 40, MAWP 4 bar	<b>K07</b>
<b>Process flanges; process connection option</b>	
Process flange with process connection G½ welded on	<b>K20</b>
Process connection NAM (ASTAVA)	<b>K21</b>
<b>Process flanges chambered with gaskets</b>	
1x chambered, graphite	<b>K40</b>
1x chambered, PTFE	<b>K41</b>
2x chambered, PTFE	<b>K42</b>
<b>Process flanges, gaskets (instead of standard gaskets FKM (FPM))</b>	
O-ring, process flanges, PTFE	<b>K50</b>
O-ring, process flanges, FEP (with silicone core, approved for food)	<b>K51</b>
O-ring, process flanges, FFKM (FFPM)	<b>K52</b>
O-ring, process flanges, NBR	<b>K53</b>
O-ring, process flanges, EPDM	<b>K54</b>

Options	Order code
Append "-Z" to Article No., add order code and plain text or entry from drop-down list.	
<b>Process flange options</b>	
Process flanges for vertical differential pressure lines (half process flange)	<b>K81</b>
Process flanges (+) - side front	<b>K82</b>
Process flange screws, process flange nuts, material Monel 400/2.4360	<b>K83</b>
Valve ¼-18 NPT, material same as process flanges	<b>K84</b>
Valve mounted on the side, measured medium: Gas	<b>K85</b>
Oval flange enclosed, gasket PTFE + mounting screws	<b>K86</b>
<b>Valve manifolds</b>	
With mounted valve manifold (3-way) 7MF9411-5BA, PTFE sealing rings, chrome-plated steel screws and pressure test certified in factory certificate (EN 10204-2.2)	<b>U01</b>
With mounted valve manifold (3-way) 7MF9411-5BA, PTFE sealing rings, stainless steel screws and pressure test certified in factory certificate (EN 10204-2.2)	<b>U02</b>
With mounted valve manifold (5-way) 7MF9411-5CA, PTFE sealing rings, chrome-plated steel screws and pressure test certified in factory certificate (EN 10204-2.2)	<b>U03</b>
With mounted valve manifold (5-way) 7MF9411-5CA, PTFE sealing rings, stainless steel screws and pressure test certified in factory certificate (EN 10204-2.2)	<b>U04</b>

# Pressure Measurement

## Pressure transmitters

for applications with advanced requirements (Advanced)

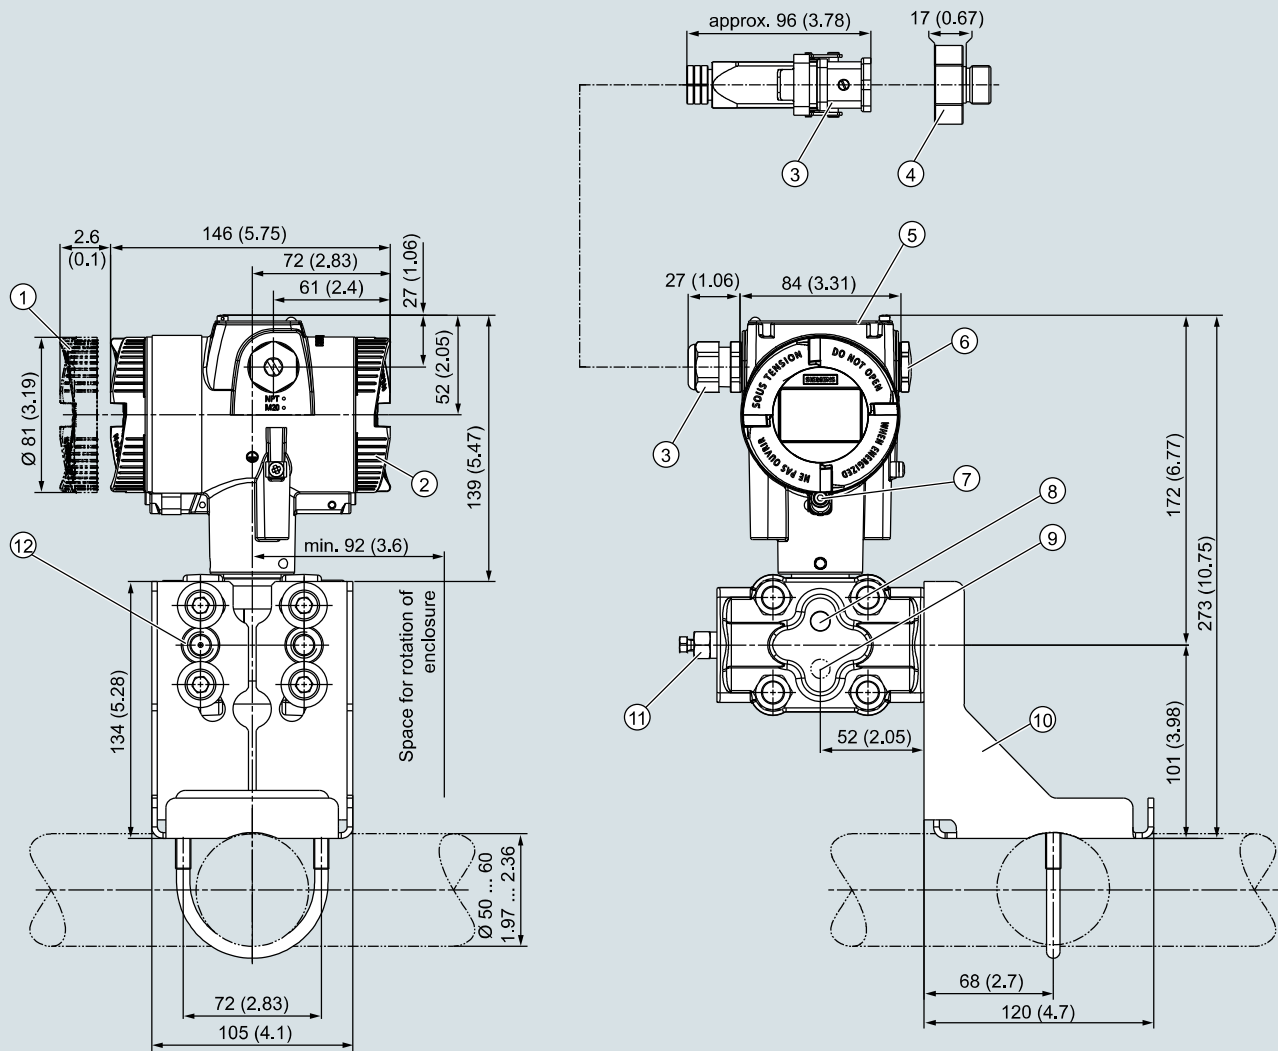
SITRANS P320/P420

for absolute pressure (differential pressure series)

1

Options	Order code
Append <b>"Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Device settings</b>	
<p>Measuring span</p> <p>Lower range value (max. 5 characters), upper range value (max. 5 characters), unit [mbar, bar, kPa, MPa, psi, ...], example: -0.5 ... 10.5 psi</p> <p>Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).</p> <p>Drop-down list: Pa, MPa, kPa, hPa, bar, mbar, psi, g/cm<sup>2</sup>, kg/cm<sup>2</sup>, kgf/cm<sup>2</sup>, inH<sub>2</sub>O, inH<sub>2</sub>O (4°C), ftH<sub>2</sub>O, mmH<sub>2</sub>O, mmH<sub>2</sub>O (4°C), mH<sub>2</sub>O (4°C), mmHg, inHg, atm, torr</p>	<b>Y01</b>
<p>TAG</p> <p>(on stainless steel plate and device parameters, max. 32 characters)</p> <p>Input field: Free text, max. 32 characters</p>	<b>Y15</b>
<p>Measuring point description</p> <p>(on stainless steel plate and device parameters, max. 32 characters)</p> <p>Input field: Free text, max. 32 characters</p>	<b>Y16</b>
<p>TAG short</p> <p>(device parameters, max. 8 characters)</p> <p>Input field: Free text, max. 8 characters</p>	<b>Y17</b>
<p>Local display</p> <p>[Pressure, Percent], reference [None, Absolute, Relative], example: Pressure gauge</p> <p>Drop-down list: Percent, pressure unit, pressure unit abs., pressure unit gauge</p>	<b>Y21</b>
<p>Local display</p> <p>Scaling with standard units</p> <p>[m<sup>3</sup>/s, l/s, m, inch, ...], example 1 ... 5 m</p> <p>Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).</p> <p>Drop-down list: m, cm, mm, in, ft, m<sup>3</sup>, l, hl, in<sup>3</sup>, ft<sup>3</sup>, yd<sup>3</sup>, gal, gal (UK), bu, bbl, bbl (US), SCF, Nm<sup>3</sup>, NI.</p>	<b>Y22</b>
<p>Local display</p> <p>Scaling with user-specific units (max. 12 characters), example 1 ... 5 m</p> <p>Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).</p> <p>Input field 3: Free text, max. 8 characters</p>	<b>Y23</b>
<p>Saturation limits instead of 3.8 ... 20.5 mA, example: 3.8 ... 22.0 mA</p> <p>Drop-down list 1: 3.9, 4</p> <p>Drop-down list 2: 20.8, 22</p>	<b>Y30</b>
<p>Fault current instead of 3.6 mA [22.5 mA, 22.8 mA]</p> <p>Drop-down list: 3.75; 21.75; 22.5; 22.6</p>	<b>Y31</b>
<p>Damping in seconds instead of 2 s (0.0 ... 100.0 s)</p> <p>Input field: max. 4 characters and numbers only; decimal places as dot (comma is automatically converted to dot); min. value = 0; max. value = 100.</p>	<b>Y32</b>
<p>ID number of special version</p> <p>Input field: max. 4 characters and only natural numbers from 0 ... 9999</p>	<b>Y99</b>

## Dimensional drawings



- ① Electronics side, local display (longer overall length for cover with glass pane)<sup>1)</sup>
- ② Connection side
- ③ Electrical connection:
  - M20 x 1,5<sup>3)</sup> screw gland
  - 1/2-14 NPT screw gland
  - Han 7D/Han 8D<sup>2) 3)</sup> device plug
  - M12 device plug<sup>2) 3)</sup>
- ④ Harting adapter
- ⑤ Cover over buttons and nameplate with general information

- ⑥ Blanking plug
- ⑦ Safety catch (only for "flameproof enclosure" type of protection)
- ⑧ Lateral ventilation for liquid measurement (Standard)
- ⑨ Lateral ventilation for gas measurement (order option K85)
- ⑩ Mounting bracket (optional)
- ⑪ Sealing plug with valve (optional)
- ⑫ Process connection: 1/4-18 NPT (IEC 61518)

<sup>1)</sup> In addition, allow approx. 22 mm (0.87 inch) for the thread length when removing the covers

<sup>2)</sup> Not with "flameproof enclosure" type of protection

<sup>3)</sup> Not with type of protection "FM + CSA" [is + XP]"

SITRANS P320/P420 pressure transmitter for absolute pressure (differential pressure series), dimensions in mm (inch)

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for differential pressure and flow

1

## Technical specifications

### SITRANS P320 / SITRANS P420 for differential pressure and flow

#### Input

Measured variable	Differential pressure and flow			
Measuring span (infinitely adjustable) and maximum operating pressure (pursuant to Pressure Equipment Directive 2014/68/EU)	Measuring span	Max. permissible operating pressure MAWP (PS)	Maximum permissible test pressure	
	1 ... 20 mbar	160 bar	240 bar	
	0.1 ... 2 kPa	16 MPa	24 MPa	
	0.4019 ... 8.037 inH <sub>2</sub> O	2320 psi	3481 psi	
	1 ... 60 mbar	160 bar	240 bar	
	0.1 ... 6 kPa	16 MPa	24 MPa	
	0.4019 ... 24.11 inH <sub>2</sub> O	2320 psi	3481 psi	
	2.5 ... 250 mbar	160 bar	240 bar	
	0.2 ... 25 kPa	16 MPa	24 MPa	
	1.005 ... 100.5 inH <sub>2</sub> O	2320 psi	3481 psi	
	6 ... 600 mbar	160 bar	240 bar	
	0.6 ... 60 kPa	16 MPa	24 MPa	
	2.41 ... 241.1 inH <sub>2</sub> O	2320 psi	3481 psi	
	16 ... 1600 mbar	160 bar	240 bar	
	1.6 ... 160 kPa	16 MPa	24 MPa	
	6.43 ... 643 inH <sub>2</sub> O	2320 psi	3481 psi	
	50 ... 5000 mbar	160 bar	240 bar	
	5 ... 500 kPa	16 MPa	24 MPa	
	20.09 ... 2009 inH <sub>2</sub> O	2320 psi	3481 psi	
	0.3 ... 30 bar	160 bar	240 bar	
	0.03 ... 3 MPa	16 MPa	24 MPa	
	4.35 ... 435 psi	2320 psi	3481 psi	
	2.5 ... 250 mbar	420 bar	630 bar	
	0.25 ... 25 kPa	42 MPa	63 MPa	
	1.005 ... 100.5 inH <sub>2</sub> O	6092 psi	9137 psi	
	6 ... 600 mbar	420 bar	630 bar	
	0.6 ... 60 kPa	42 MPa	63 MPa	
	2.41 ... 241.1 inH <sub>2</sub> O	6092 psi	9137 psi	
	16 ... 1600 mbar	420 bar	630 bar	
	1.6 ... 160 kPa	42 MPa	63 MPa	
	6.43 ... 643 inH <sub>2</sub> O	6092 psi	9137 psi	
	50 ... 5000 mbar	420 bar	630 bar	
	5 ... 500 kPa	42 MPa	63 MPa	
	20.09 ... 2009 inH <sub>2</sub> O	6092 psi	9137 psi	
	0.3 ... 30 bar	420 bar	630 bar	
	0.03 ... 3 MPa	42 MPa	63 MPa	
	4.35 ... 435 psi	6092 psi	9137 psi	
	Measuring limits			
	• Low measuring limit			
	- Measuring cell with silicone oil filling	-100% of the maximum measuring span (-33% for measuring cell 30 bar/3 MPa/435 psi PN 420) or 30 mbar a /3 kPa a /0.44 psi a		
- Measuring cell with inert liquid				
	For temperature of medium -20 °C < $\vartheta \leq +60\text{ °C}$ (-4 °F < $\vartheta \leq +140\text{ °F}$ )	-100% of maximum measuring range or 30 mbar a /3 kPa a /0.44 psi a		
	For temperature of medium $60\text{ °C} < \vartheta \leq +100\text{ °C}$ (max. 85 °C for measuring cell 30 bar with PN 420) ( $140\text{ °F} < \vartheta \leq +212\text{ °F}$ (max. 185 °F for measuring cell 435 psi))	-100% of maximum measuring range or 30 mbar a /3 kPa a /0.44 psi a		
		$30\text{ mbar a} + 20\text{ mbar a} \cdot (\vartheta - 60\text{ °C})/\text{°C}$ $3\text{ kPa a} + 2\text{ kPa a} \cdot (\vartheta - 60\text{ °C})/\text{°C}$ $0.44\text{ psi a} + 0.29\text{ psi a} \cdot (\vartheta - 140\text{ °F})/\text{°F}$		
- Measuring cell with FDA-compliant oil	For temperature of medium $-10\text{ °C} < \vartheta \leq +100\text{ °C}$ (-14 °F < $\vartheta \leq +212\text{ °F}$ )	-100% of maximum measuring range or 100 mbar a /10 kPa a /14.5 psi a		
• Upper measuring limit	100% of the max. measuring span (for oxygen measurement max. 100 bar/10 MPa/ 1450 psi and 60 °C (140 °F) ambient temperature/temperature of medium)			
• Lower range value	Between the measuring limits (infinitely adjustable)			

**SITRANS P320 / SITRANS P420 for differential pressure and flow****Output**

Output signal

- Low saturation limit (infinitely adjustable)
- High saturation limit (infinitely adjustable)
- Ripple (without HART communication)

Adjustable damping

- Current transmitter
- Failure signal

Load

- Without HART communication

- With HART communication

Characteristic curve

Physical bus

Polarity-independent

**HART**

4 ... 20 mA

3.55 mA, factory preset to 3.8 mA

22.8 mA, factory-set to 20.5 mA or optionally 22.0 mA

 $I_{pp} \leq 0.5\%$  of max. output current

0 ... 100 s, continuously adjustable over remote operation

0 ... 100 s, in increments of 0.1 s, adjustable over display

3.55 ... 22.8 mA

3.55 ... 22.8 mA

Resistor R [ $\Omega$ ] $R = (U_H - 10.5 \text{ V})/22.8 \text{ mA}$ , $U_H$ : Power supply in V $R = 230 \dots 1100 \Omega$  (HART communicator (handheld)) $R = 230 \dots 500 \Omega$  (SIMATIC PDM)

- Linearly increasing or linearly decreasing
- Linear increase or decrease or according to the square root (only for differential pressure and flow)

-

-

**Measuring accuracy**

Reference conditions

- According to EN 60770-1
- Rising characteristic curve
- Lower range value 0 bar/kPa/psi
- Seal diaphragm stainless steel
- Measuring cell with silicone oil filling
- Room temperature 25 °C (77 °F)

Conformity error at limit point setting, including hysteresis and repeatability

Measuring span ratio r (spread, Turn-Down)

- Linear characteristic

- 20 mbar/2 kPa/0.29 psi

- 60 mbar/6 kPa/0.87 psi

- 250 mbar/25 kPa/3.63 psi  
 600 mbar/60 kPa/8.7 psi  
 1600 mbar/160 kPa/23.21 psi  
 5 bar/500 kPa/72.5 psi  
 30 bar/3 MPa/435 psi

- 250 mbar/25 kPa/3.63 psi (PN 160)  
 600 mbar/60 kPa/8.7 psi  
 1600 mbar/160 kPa/23.21 psi  
 5 bar/500 kPa/72.5 psi  
 30 bar/3 MPa/435 psi

- 250 mbar/25 kPa/3.63 psi (PN 420)

- Square-rooted characteristic (flow > 50%)

- 20 mbar/2 kPa/0.29 psi

- 60 mbar/6 kPa/0.87 psi

- 250 mbar/25 kPa/3.63 psi  
 600 mbar/60 kPa/8.7 psi  
 1600 mbar/160 kPa/23.21 psi  
 5 bar/500 kPa/72.5 psi  
 30 bar/3 MPa/435 psi

- Square-rooted characteristic (flow 25 ... 50%)

- 20 mbar/2 kPa/0.29 psi

- 60 mbar/6 kPa/0.87 psi

- 250 mbar/25 kPa/3.63 psi  
 600 mbar/60 kPa/8.7 psi  
 1600 mbar/160 kPa/23.21 psi  
 5 bar/500 kPa/72.5 psi  
 30 bar/3 MPa/435 psi

r = maximum measuring span/set measuring span or nominal measuring range

$r \leq 5$ :	$\leq 0.075\%$
$5 < r \leq 20$ :	$\leq (0.005 \cdot r + 0.05)\%$
$r \leq 5$ :	$\leq 0.075\%$
$5 < r \leq 60$ :	$\leq (0.005 \cdot r + 0.05)\%$
$r \leq 5$ :	$\leq 0.065\%$ (SITRANS P320)
$5 < r \leq 100$ :	$\leq (0.004 \cdot r + 0.045)\%$ (SITRANS P320)
$r \leq 5$ :	$\leq 0.04\%$ (SITRANS P420)
$5 < r \leq 100$ :	$\leq (0.004 \cdot r + 0.045)\%$ (SITRANS P420)
$r \leq 5$ :	$\leq 0.065\%$ (SITRANS P420)
$r \leq 5$ :	$\leq 0.075\%$
$5 < r \leq 20$ :	$\leq (0.005 \cdot r + 0.05)\%$
$r \leq 5$ :	$\leq 0.075\%$
$5 < r \leq 60$ :	$\leq (0.005 \cdot r + 0.05)\%$
$r \leq 5$ :	$\leq 0.065\%$ (SITRANS P320)
$r \leq 5$ :	$\leq 0.04\%$ (SITRANS P420)
$5 < r \leq 100$ :	$\leq (0.004 \cdot r + 0.045)\%$
$r \leq 5$ :	$\leq 0.15\%$
$5 < r \leq 20$ :	$\leq (0.01 \cdot r + 0.1)\%$
$r \leq 5$ :	$\leq 0.15\%$
$5 < r \leq 60$ :	$\leq (0.01 \cdot r + 0.1)\%$
$r \leq 5$ :	$\leq 0.13\%$ (SITRANS P320)
$r \leq 5$ :	$\leq 0.08\%$ (SITRANS P420)
$5 < r \leq 100$ :	$\leq (0.008 \cdot r + 0.09)\%$

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

## for differential pressure and flow

1

### SITRANS P320 / SITRANS P420 for differential pressure and flow

Influence of ambient temperature (in % per 28 °C (50 °F))

- 20 mbar/2 kPa/0.29 psi	$\leq (0.15 \cdot r + 0.1)\%$
- 60 mbar/6 kPa/0.87 psi	$\leq (0.075 \cdot r + 0.1)\%$
- 250 mbar/25 kPa/3.63 psi	$\leq (0.025 \cdot r + 0.125)\%$ (SITRANS P320)
- 600 mbar/60 kPa/8.7 psi	
- 1600 mbar/160 kPa/23.21 psi	
- 5 bar/500 kPa/72.5 psi	
- 30 bar/3 MPa/435 psi	
- 250 mbar/25 kPa/3.63 psi	$\leq (0.025 \cdot r + 0.0625)\%$ (SITRANS P420)
- 5 bar/500 kPa/72.5 psi	
- 600 mbar/60 kPa/8.7 psi	$\leq (0.0125 \cdot r + 0.0625)\%$ (SITRANS P420)
- 1600 mbar/160 kPa/23.21 psi	
- 30 bar/3 MPa/435 psi	

Effect of static pressure

• on the lower range value	Zero-point correction is possible with position error compensation
- 20 mbar/2 kPa/0.29 psi	$\leq (0.3 \cdot r)\%$ per 70 bar (SITRANS P320)
	$\leq (0.2 \cdot r)\%$ per 70 bar (SITRANS P420)
	$\leq (0.1 \cdot r)\%$ per 70 bar
- 60 mbar/6 kPa/0.87 psi	
- 250 mbar/25 kPa/3.63 psi	
- 600 mbar/60 kPa/8.7 psi	
- 1600 mbar/160 kPa/23.21 psi	
- 30 bar/3 MPa/435 psi	
- 5 bar/500 kPa/72.5 psi	$\leq (0.15 \cdot r)\%$ per 70 bar
• on the measuring span	
- 20 mbar/2 kPa/0.29 psi	$\leq 0.2\%$ per 70 bar
- 60 mbar/6 kPa/0.87 psi	$\leq 0.1\%$ per 70 bar
- 250 mbar/25 kPa/3.63 psi	
- 600 mbar/60 kPa/8.7 psi	
- 1600 mbar/160 kPa/23.21 psi	
- 5 bar/500 kPa/72.5 psi	
- 30 bar/3 MPa/435 psi	

Long-term stability at  $\pm 30$  °C ( $\pm 54$  °F)

• 20 mbar/2 kPa/0.29 psi	Static pressure max. 70 bar/7 MPa/1015 psi
• 60 mbar/6 kPa/0.87 psi	$\leq (0.2 \cdot r)\%$ per year
• 250 mbar/25 kPa/3.63 psi	In 5 years $\leq (0.25 \cdot r)\%$
• 600 mbar/60 kPa/8.7 psi	In 5 years $\leq (0.125 \cdot r)\%$
• 1600 mbar/160 kPa/23.21 psi	In 10 years $\leq (0.15 \cdot r)\%$
• 5 bar/500 kPa/72.5 psi	
• 30 bar/3 MPa/435 psi	In 5 years $\leq (0.25 \cdot r)\%$
	In 10 years $\leq (0.35 \cdot r)\%$

Step response time  $T_{63}$  (without electrical damping for pressure rating PN 1600)

• 20 mbar/2 kPa/0.29 psi	Approx. 0.160 s
• 60 mbar/6 kPa/0.87 psi	Approx. 0.150 s
• 250 mbar/25 kPa/3.63 psi	Approx. 0.135 s
• 600 mbar/60 kPa/8.7 psi	
• 1600 mbar/160 kPa/23.21 psi	
• 5 bar/500 kPa/72.5 psi	
• 30 bar/3 MPa/435 psi	

Effect of mounting position (in pressure per change of angle)  $\leq 0.7$  mbar/0.07 kPa/0.028 inH<sub>2</sub>O per 10° incline (zero point correction is possible with position error compensation)

Effect of auxiliary power (in % per voltage change) 0.005% per 1 V

**SITRANS P320 / SITRANS P420 for differential pressure and flow****Operating conditions**

Temperature of medium

- Measuring cell with silicone oil filling
  - Measuring cell 30 bar (435 psi)
- Measuring cell with inert oil
- Measuring cell with FDA-compliant oil
- In conjunction with dust explosion protection

-40 ... +100 °C (-40 ... +212 °F)  
 -20 ... +100 °C (-4 ... +212 °F)  
 -20 ... +100 °C (-4 ... +212 °F)  
 -10 ... +100 °C (14 ... +212 °F)  
 -40 ... +85 °C (-4 ... +185 °F)

Ambient conditions

- Ambient temperature/enclosure
  - Measuring cell with silicone oil filling
  - Measuring cell with inert oil
  - Measuring cell with FDA-compliant oil
  - Display
- Storage temperature
- Climatic class in accordance with IEC 60721-3-4
- Degree of protection
  - According to IEC 60529
  - According to NEMA 250
- Electromagnetic compatibility
  - Emitted interference and interference immunity

Observe the temperature class in areas subject to explosion hazard.  
 -40 ... +85 °C (-40 ... +185 °F)  
 -40 ... +85 °C (-40 ... +185 °F)  
 -10 ... +85 °C (14 ... +185 °F)  
 -20 ... +80 °C (-4 ... +176 °F)  
 -50 ... +85 °C (-58 ... +185 °F) (with FDA-compliant oil: -20 ... +85 °C (-4 ... +185 °F))  
 4K4H  
 IP66, IP68  
 Type 4X  
 According to IEC 61326 and NAMUR NE 21

**Design**

Weight

Approx. 3.9 kg (8.5 lb) with aluminum enclosure  
 Approx. 5.8 kg (12.7 lb) with stainless steel enclosure

Material

- Wetted parts materials
  - Seal diaphragm
  - Process flanges and sealing plugs
  - O-ring
- Non-wetted parts materials
  - Electronics enclosure
  - Pressure flange screws
  - Mounting bracket

Stainless steel, mat. no. 1.4404/316L, Alloy C276, mat. no. 2.4819, Monel, mat. no. 2.4360, tantalum or gold  
 Stainless steel, mat. no. 1.4408 to PN 160, mat. no. 1.4571/316Ti for PN 420, Alloy C22, 2.4602 or Monel, mat. no. 2.4360  
 FPM (Viton) or optionally: PTFE, FEP, FEPM and NBR  
 • Low-copper die-cast aluminum GD-AISI 12 or stainless steel precision casting, mat. no. 1.4409/ CF-3M  
 • Standard: Powder coating with polyurethane  
 Option: 2 coats: Coat 1: epoxy-based; coat 2: Polyurethane  
 • Stainless steel type plate (1.4404/316L)  
 Stainless steel ISO 3506-1 A4-70  
 Steel, electrogalvanized steel, or stainless steel

Process connection

1/4-18 NPT female thread and flat connection with 7/16-20 UNF fastening screw thread in accordance with EN 61518 or M10 fastening screw thread in accordance with DIN 19213 (M12 for PN 420 (MWP 6092 psi))

Electrical connection

Screw terminals  
 Cable entry via the following screwed glands:  
 • M20 x 1.5  
 • 1/2-14 NPT  
 • Device plug Han 7D/Han 8D<sup>1)</sup>  
 • Device plug M12

**Displays and controls**

Keys

4 keys for operation directly on the device

Display

- With or without integrated display (optional)
- Cover with inspection window (optional)

**Auxiliary power  $U_H$** 

Terminal voltage on pressure transmitter

10.5 ... 45 V DC  
 10.5 ... 30 V DC in intrinsically safe mode

Ripple

 $U_{SS} \leq 0.2 \text{ V (47 ... 125 Hz)}$ 

Noise

 $U_{eff} \leq 1.2 \text{ mV (0.5 ... 10 kHz)}$ 

Auxiliary power

—

Separate supply voltage

—



# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for differential pressure and flow

1

## SITRANS P320 / SITRANS P420 for differential pressure and flow

### Certificates and approvals

Classification according to pressure equipment directive (PED 2014/68/EU)

Drinking water

- WRAS (England)
- ACS (France)
- NSF (USA)

CRN (Canada)

Explosion protection acc. to NEPSI (China)

Explosion protection acc. to INMETRO (Brazil)

Explosion protection

- Intrinsic safety "i"

- Marking
- Permissible ambient temperature
- Permissible temperature of measuring medium
- Connection

- Effective internal inductance/capacitance

- Flameproof enclosure "d"

- Marking
- Permissible ambient temperature
- Permissible temperature of measuring medium
- Connection

- Dust explosion protection for zones 21, 22

- Marking
- Permissible ambient temperature
- Permissible temperature of measuring medium
- Max. surface temperature
- Connection

- Dust explosion protection for zones 20, 21, 22

- Marking
- Permissible ambient temperature
- Permissible temperature of measuring medium
- Connection

- Effective internal inductance/capacitance

- Type of protection for Zone 2

- Marking
- Permissible ambient temperature "ec"
- Permissible temperature of measuring medium
- "ec" connection

For gases of fluid group 1 and liquids of fluid group 1; complies with requirements of article 4, paragraph 3 (sound engineering practice)

### For flow only

For gases of fluid group 1 and liquids of fluid group 1; fulfills the basic safety requirements as per article 3, paragraph 1 (appendix 1); classified as category III, module H conformity evaluation by TÜV Nord

No.: 1903094 (option E83)

No.: 18 ACC LY 277 (option E85)

No.: 20180920-MH61350 (option E84)

No.: 0F9863.5C (option E60)

No.: GYJ19.1058X (option E27)

No.: BRA-18-GE-0035X (option E25)

II 1/2 G Ex ia/ib IIC T4/T6 Ga/Gb

-40 ... +80 °C (-40 ... +176 °F) temperature class T4

-40 ... +70 °C (-40 ... +158 °F) temperature class T6

-40 ... +100 °C (-40 ... +212 °F) temperature class T4

-40 ... +70 °C (-40 ... +158 °F) temperature class T6

To certified intrinsically safe circuits with peak values:

$U_i = 30 \text{ V}$ ,  $I_i = 101 \text{ mA}$ ,  $P_i = 760 \text{ mW}$

$U_i = 29 \text{ V}$ ,  $I_i = 110 \text{ mA}$ ,  $P_i = 800 \text{ mW}$

$L_i = 0.24 \text{ μH}$ / $C_i = 3.29 \text{ nF}$

Ex II 1/2 G Ex ia/db IIC T4/T6 Ga/Gb

-40 ... +80 °C (-40 ... +176 °F) temperature class T4

-40 ... +70 °C (-40 ... +158 °F) temperature class T6

-40 ... +100 °C (-40 ... +212 °F) temperature class T4

-40 ... +70 °C (-40 ... +158 °F) temperature class T6

To a circuit with the operating values:

$U_n = 10.5 \text{ to } 45 \text{ V}$ ,  $4 \text{ ... } 20 \text{ mA}$

Ex II 2D Ex tb IIIC T120 °C Db

Ex II 3D Ex tc IIIC T120 °C Dc

-40 ... +80 °C (-40 ... +176 °F)

-40 ... +100 °C (-40 ... +212 °F)

120 °C (248 °F)

To a circuit with the operating values:

$U_n = 10.5 \text{ to } 45 \text{ V}$ ,  $4 \text{ ... } 20 \text{ mA}$

Ex II 1D Ex ia IIIC T120 °C Da

Ex II 2D Ex ib IIIC T120 °C Db

-40 ... +80 °C (-40 ... +176 °F)

-40 ... +100 °C (-40 ... +212 °F)

To certified intrinsically safe circuits with the peak values:

$U_i = 30 \text{ V}$ ,  $I_i = 101 \text{ mA}$ ,  $P_i = 760 \text{ mW}$

$U_i = 29 \text{ V}$ ,  $I_i = 110 \text{ mA}$ ,  $P_i = 800 \text{ mW}$

$L_i = 0.24 \text{ μH}$ / $C_i = 3.29 \text{ nF}$

Ex II 3G Ex ec IIC T4/T6 Gc

-40 ... +80 °C (-40 ... +176 °F) temperature class T4

-40 ... +40 °C (-40 ... +104 °F) temperature class T6

-40 ... +100 °C (-40 ... +212 °F) temperature class T4

-40 ... +70 °C (-40 ... +158 °F) temperature class T6

To a circuit with the operating values:

$U_n = 10.5 \text{ to } 30 \text{ V}$ ,  $4 \text{ ... } 20 \text{ mA}$

**SITRANS P320 / SITRANS P420 for differential pressure and flow**

<ul style="list-style-type: none"> <li>• Explosion protection acc. to FM               <ul style="list-style-type: none"> <li>- Marking (XP/DIP) or IS; NI; S</li> </ul> </li> <li>• Explosion protection according to CSA               <ul style="list-style-type: none"> <li>- Marking (XP/DIP) or (IS)</li> </ul> </li> </ul>	<p>Available soon</p> <p>CL I, DIV 1, GP ABCD T4 ... T6; CL II, DIV 1, GP EFG; CL III; Ex ia IIC T4 ... T6; CL I, DIV 2, GP ABCD T4 ... T6; CL II, DIV 2, GP FG; CL III</p> <p>Available soon</p> <p>CL I, DIV 1, GP ABCD T4 ... T6; CL II, DIV 1, GP EFG; CL III; Ex ia IIC T4 ... T6; CL I, DIV 2, GP ABCD T4 ... T6; CL II, DIV 2, GP FG; CL III</p>
NAMUR recommendations	
<ul style="list-style-type: none"> <li>• NE 06</li> <li>• NE 21</li> <li>• NE 23</li> <li>• NE 43</li> <li>• NE 53</li> <li>• NE 80</li> <li>• NE 105</li> <li>• NE 107</li> <li>• NE 131</li> </ul>	<p>Standardized Electrical Signals and Questions Relating to Engineering Technology</p> <p>Electromagnetic Compatibility (EMC) of Industrial Process and Laboratory Control Equipment</p> <p>Extra Low Voltage Circuits with Safe Separation</p> <p>Standardization of the Signal Level for the Failure Information of Digital Transmitters</p> <p>Software and Hardware of Field Devices and Signal Processing Devices with Digital Electronics</p> <p>The Application of the Pressure Equipment Directive to Process Control Devices</p> <p>Specifications for Integrating Fieldbus Devices in Engineering Tools for Field Devices</p> <p>Self-Monitoring and Diagnosis of Field Devices</p> <p>NAMUR Standard Device - Field Devices for Standard Applications</p>

**HART communication**

HART	230 ... 1100 Ω
Protocol	HART 7
Software for computer	SIMATIC PDM

# Pressure Measurement



Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for differential pressure and flow

1

## Selection and ordering data

	Article No.
<b>Pressure transmitters for differential pressure and flow, PN 160 (MAWP 2320 psi)</b>	
<b>SITRANS P320</b>	➤ 7MF034 - - - - -
<b>SITRANS P420</b>	➤ 7MF044 - - - - -
➤ Click on the Article no. for the online configuration in the PIA Life Cycle Portal.	
<b>Communication</b>	
HART, 4 ... 20 mA	0
<b>Measuring cell filling</b>	
Silicone oil	1
Inert liquid	3
Neobee oil	4
<b>Maximum measuring span</b>	
20 mbar (8.037 inH <sub>2</sub> O)	B
60 mbar (24.11 inH <sub>2</sub> O)	D
250 mbar (100.5 inH <sub>2</sub> O)	G
600 mbar (241.1 inH <sub>2</sub> O)	H
1 600 mbar (643 inH <sub>2</sub> O)	M
5000 mbar (2009 inH <sub>2</sub> O)	P
30 bar (435 psi)	R
<b>Process connection</b>	
Oval flange, mounting thread: $\frac{7}{16}$ -20 UNF (IEC 61518)	L
Oval flange, mounting thread: M10 (PN 160) (DIN 19213)	M
Oval flange, mounting thread: $\frac{7}{16}$ -20 UNF (IEC 61518) with lateral ventilation	N
Oval flange, mounting thread: M10 (PN 160) (DIN 19213) with lateral ventilation	P
Version for diaphragm seal with mounting thread $\frac{7}{16}$ -20 UNF (IEC 61518)	V
Version for diaphragm seal with mounting thread M10 (DIN 19213)	W
Version for diaphragm seal (level and capillary) with mounting thread $\frac{7}{16}$ -20 UNF (IEC 61518)	X
<b>Wetted parts materials: Process connection, seal diaphragm</b>	
Stainless steel 316L/1.4404, stainless steel 316L/1.4404, process flange stainless steel 316/1.4408	0
Stainless steel 316L/1.4404, alloy C276/2.4819, process flange stainless steel 316/1.4408	1
Alloy C22/2.4602, alloy C276/2.4819, process flange stainless steel 316/1.4408	2
Tantalum/tantalum, process flange stainless steel 316/1.4408 (not in combination with maximum measuring span 20 mbar (0.29 psi) and 60 mbar (0.87 psi))	4
Monel 00/2.4360, Monel 400/2.4360, process flange stainless steel 316/1.4408 (not in combination with maximum measuring span 20 mbar (0.29 psi) and 60 mbar (0.87 psi))	6
Stainless steel 316L/1.4404, gold-plated, process flange stainless steel 316/1.4408 (not in combination with maximum measuring span 20 mbar (0.29 psi) and 60 mbar (0.87 psi))	8
<b>Non-wetted parts materials</b>	
Die-cast aluminum	1
Stainless steel precision casting CF3M/1.4409 similar to 316L	2
<b>Enclosure</b>	
Dual chamber device	5
<b>Type of protection</b>	
Without Ex	A
Intrinsic safety	B
Flameproof enclosure	C
Flameproof enclosure, intrinsic safety	D
Dust protection by enclosure Zone 21/22 (DIP), increased safety Zone 2	L
Dust protection by enclosure Zone 20/21/22 (DIP), increased safety Zone 2	M
Combination of options B, C and L (zone model)	S
Combination of options B, C and M (zone model, Class Division)	T
<b>Electrical connections/cable entries</b>	
Thread for cable gland: Cable gland must be ordered separately as option (Axx)	
• 2 x M20 x 1.5	F
• 2 x ½-14 NPT	M

	Article No.
<b>Pressure transmitters for differential pressure and flow, PN 160 (MAWP 2320 psi)</b>	
<b>SITRANS P320</b>	<b>7MF034</b> 
<b>SITRANS P420</b>	<b>7MF044</b> 
<b>Local operation/display</b>	
Without display (cover closed)	0
With display (cover closed)	1
With display (cover with glass pane)	2

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for differential pressure and flow

Article No.

## Pressure transmitters for differential pressure and flow, PN 420 (MAWP 6092 psi)

### SITRANS P320

➤ 7MF035 - - - - -

### SITRANS P420

➤ 7MF045 - - - - -

➤ Click on the Article no. for the online configuration in the PIA Life Cycle Portal.

### Communication

HART, 4 ... 20 mA

### Measuring cell filling

Silicone oil

Inert liquid

Neobee oil

### Maximum measuring span

250 mbar (100.5 inH<sub>2</sub>O)

600 mbar (241.1 inH<sub>2</sub>O)

1 600 mbar (643 inH<sub>2</sub>O)

5000 mbar (2009 inH<sub>2</sub>O)

30 bar (435 psi)

### Process connection

Oval flange, mounting thread:  $\frac{7}{16}$ -20 UNF (IEC 61518)

Oval flange, mounting thread: M12 (PN 420) (DIN 19213)

Oval flange, mounting thread:  $\frac{7}{16}$ -20 UNF (IEC 61518) with lateral ventilation

Oval flange, mounting thread: M12 (PN 420) (DIN 19213) with lateral ventilation

Version for diaphragm seal with mounting thread  $\frac{7}{16}$ -20 UNF (IEC 61518)

Version for diaphragm seal with mounting thread M10 (DIN 19213)

Version for diaphragm seal (level and capillary) with mounting thread  $\frac{7}{16}$ -20 UNF (IEC 61518)

### Wetted parts materials: Process connection, seal diaphragm

Stainless steel 316L/1.4404, stainless steel 316L/1.4404, process flange stainless steel 316/1.4408

Stainless steel 316L/1.4404, alloy C276/2.4819, process flange stainless steel 316/1.4408

Stainless steel 316L/1.4404, gold-plated, process flange stainless steel 316/1.4408

### Non-wetted parts materials

Die-cast aluminum

Stainless steel precision casting CF3M/1.4409 similar to 316L

### Enclosure

Dual chamber device

### Type of protection

Without Ex

Intrinsic safety

Flameproof enclosure

Flameproof enclosure, intrinsic safety

Dust protection by enclosure Zone 21/22 (DIP), increased safety Zone 2

Dust protection by enclosure Zone 20/21/22 (DIP), increased safety Zone 2

Combination of options B, C and L (zone model)

Combination of options B, C and M (zone model, Class Division)

### Electrical connections/cable entries

Thread for cable gland: Cable gland must be ordered separately as option (Axx)

• 2 x M20 x 1.5

• 2 x  $\frac{1}{2}$ -14 NPT

### Local operation/display

Without display (cover closed)

With display (cover closed)

With display (cover with glass pane)

0

1

3

4

G

H

M

P

R

L

M

N

P

V

W

X

0

1

8

1

2

5

A

B

C

D

L

M

S

T

F

M

0

1

2

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for differential pressure and flow

1

**Selection and ordering data**

Options	Order code
Append "-Z" to Article No., add order code and plain text or entry from drop-down list.	
<b>Cable glands included</b>	
Plastic	<b>A00</b>
Metal	<b>A01</b>
Stainless steel	<b>A02</b>
Stainless steel 316L/1.4404	<b>A03</b>
CMP, for XP devices	<b>A10</b>
CAPRI ADE 4F, CuZn, cable inner diameter 7 ... 12 mm, cable outer diameter 10 ... 16 mm	<b>A11</b>
CAPRI ADE 4F, stainless steel, cable inner diameter 7 ... 12 mm, cable outer diameter 10 ... 16 mm	<b>A12</b>
<b>Device plug Han mounted left</b>	
Device plug Han 7D (plastic, straight)	<b>A30</b>
Device plug Han 7D (plastic, angled)	<b>A31</b>
Device plug Han 7D (metal, straight)	<b>A32</b>
Device plug Han 7D (metal, angled)	<b>A33</b>
Device plug Han 8D (plastic, straight)	<b>A34</b>
Device plug Han 8D (plastic, angled)	<b>A35</b>
Device plug Han 8D (metal, straight)	<b>A36</b>
Device plug Han 8D (metal, angled)	<b>A37</b>
<b>Cable socket included</b>	
Plastic, for device plug Han 7D and Han 8D	<b>A40</b>
Metal, for device plug Han 7D and Han 8D	<b>A41</b>
<b>Device plug M12 mounted left</b>	
Stainless steel, without cable socket	<b>A62</b>
Stainless steel, with cable socket	<b>A63</b>
<b>Cable entry/connector mounting</b>	
2x sealing plugs M20 x 1.5, IP66/68 installed on both sides	<b>A90</b>
2x sealing plugs ½-14 NPT, IP66/68 installed on both sides	<b>A91</b>
Cable gland/connector mounted left	<b>A97</b>
Cable gland/connector mounted on right	<b>A99</b>
<b>Nameplate labeling (standard labeling: English, unit bar)</b>	
German (bar)	<b>B11</b>
French (bar)	<b>B12</b>
Spanish (bar)	<b>B13</b>
Italian (bar)	<b>B14</b>
Chinese (bar)	<b>B15</b>
Russian (bar)	<b>B16</b>
English (psi)	<b>B20</b>
English (Pa)	<b>B30</b>
Chinese (Pa)	<b>B35</b>
<b>Certificates</b>	
Quality test certificate, 5-point factory calibration (IEC 60770-2)	<b>C11</b>
Inspection certificate (EN 10204-3.1) - Material of pressurized and wetted parts	<b>C12</b>
Factory certificate - NACE (MR 0103-2012 and MR 0175-2009)	<b>C13</b>
Factory certificate (EN 10204-2.2) - Wetted parts	<b>C14</b>
Inspection certificate (EN 10204-3.1) - PMI test of pressurized and wetted parts	<b>C15</b>
<b>Certificates for functional safety</b>	
Functional safety (IEC 61508) - SIL2/3	<b>C20</b>

Options	Order code
Append "-Z" to Article No., add order code and plain text or entry from drop-down list.	
<b>Device options</b>	
PDF file with device settings	<b>D10</b>
Double layer coating (epoxy resin and polyurethane) 120 µm of enclosure and cover	<b>D20</b>
FVMQ enclosure sealing	<b>D21</b>
IP66/IP68 degree of protection (not for device plugs M12 and Han )	<b>D30</b>
TAG label empty	<b>D40</b>
Without labeling of the measuring range on the TAG label	<b>D41</b>
Stainless steel Ex plate 1.4404/316L	<b>D42</b>
Increase of pressure stage from PN 420 to PN 500 (tested according to IEC 61010. Only permissible for media of fluid group 2 acc. to DGRL. Not suitable for use with hazardous media.))	<b>D50</b>
Overvoltage protection up to 6 kV (external)	<b>D71</b>
Adhesive labels on transport packaging (supplied by customer)	<b>D90</b>
<b>General approval without Ex approval</b>	
Worldwide (CE, RCM) except EAC, FM, CSA, KCC	<b>E00</b>
Worldwide (CE, RCM, EAC, FM, CSA, KCC)	<b>E01</b>
CSA (USA and Canada)	<b>E06</b>
EAC	<b>E07</b>
FM	<b>E08</b>
KCC	<b>E09</b>
Export approval CPA (China)	<b>E12</b>
<b>Explosion protection approvals</b>	
ATEX (Europe)	<b>E20</b>
CSA (USA and Canada)	<b>E21</b>
FM (USA and Canada)	<b>E22</b>
IECEx (Worldwide)	<b>E23</b>
EACEx (GOST-R, -K, -B)	<b>E24</b>
INMETRO (Brazil)	<b>E25</b>
KCs (Korea)	<b>E26</b>
NEPSI (China)	<b>E27</b>
PESO (India)	<b>E28</b>
UKR Sepro (Ukraine)	<b>E30</b>
ATEX (Europe) and IECEx (Worldwide)	<b>E47</b>
CSA (Canada) and FM (USA)	<b>E48</b>
ATEX (Europe) and IECEx (Worldwide) + CSA (Canada) and FM (USA)	<b>E49</b>
<b>Marine approvals</b>	
DNV-GL (Det Norske Veritas/Germanischer Lloyd)	<b>E50</b>
LR (Lloyds Register)	<b>E51</b>
BV (Bureau Veritas)	<b>E52</b>
ABS (American Bureau of Shipping)	<b>E53</b>
RMR (Russian Maritime Register)	<b>E55</b>
KR (Korean Register of Shipping)	<b>E56</b>
RINA (Registro Italiano Navale)	<b>E57</b>
CCS (China Classification Society)	<b>E58</b>
<b>Country-specific approvals</b>	
CRN approval Canada (Canadian Registration Number)	<b>E60</b>

## Pressure Measurement

### Pressure transmitters

for applications with advanced requirements (Advanced)

SITRANS P320/P420

#### for differential pressure and flow

Options	Order code
Append "-Z" to Article No., add order code and plain text or entry from drop-down list.	
<b>Special approvals</b>	
Oxygen application (with inert liquid, max. 100 bar (1 450 psi) at 60° C (140 °F))	<b>E80</b>
Dual seal	<b>E81</b>
WRC / WRAS (drinking water); only with pressure cap O-rings made of EPDM	<b>E83</b>
NSF61 (drinking water)	<b>E84</b>
ACS (drinking water)	<b>E85</b>
<b>Mounting bracket</b>	
Steel, galvanized	<b>H01</b>
Stainless steel 1.4301/304	<b>H02</b>
Stainless steel 1.4404/316L	<b>H03</b>
<b>Process flanges; screw plug with vent valve</b>	
Welded in on right	<b>J08</b>
Welded in on left	<b>J09</b>
Glued in on right	<b>J10</b>
Glued in on left	<b>J11</b>
<b>Flange connections with flange EN 1092-1</b>	
Form B1	
• DN 25 PN 40, stainless steel 1.4571/316Ti	<b>J70</b>
• DN 50 PN 40, stainless steel 1.4571/316Ti	<b>J71</b>
• DN 80 PN 40, stainless steel 1.4571/316Ti	<b>J72</b>
• DN 15 PN 40, stainless steel 1.4571/316Ti	<b>J78</b>
Form C	
• DN 25 PN 40, stainless steel 1.4571/316Ti	<b>J73</b>
• DN 50 PN 40, stainless steel 1.4571/316Ti	<b>J74</b>
• DN 80 PN 40, stainless steel 1.4571/316Ti	<b>J75</b>
<b>Flange connection options</b>	
Flange connection and temperature extension	<b>J76</b>
Flange connection with epoxy resin coating	<b>J77</b>
<b>Process flanges; special materials</b>	
Reserved for 7MF7: without process flanges, without screws, without gaskets	<b>K00</b>
Process flange material alloy C22/2.4602	<b>K01</b>
Process flange material Monel 400/2.4360	<b>K02</b>
Process connection material PVDF, on the side ½-14 NPT	<b>K05</b>
Process flanges/process connection material PVDF, flange on the side EN 1092-1 Form B1 DN 25 PN 40, MAWP 4 bar	<b>K06</b>
Process flanges/process connection material PVDF, flange on the side EN 1092-1 Form B1 DN 40 PN 40, MAWP 4 bar	<b>K07</b>
<b>Process flanges; process connection option</b>	
Process flange with process connection G½ welded on	<b>K20</b>
Process connection NAM (ASTAVA)	<b>K21</b>
<b>Process flanges chambered with gaskets</b>	
1x chambered, graphite	<b>K40</b>
1x chambered, PTFE	<b>K41</b>
2x chambered, PTFE	<b>K42</b>
<b>Process flanges, gaskets (instead of standard gaskets FKM (FPM))</b>	
O-ring, process flanges, PTFE	<b>K50</b>
O-ring, process flanges, FEP (with silicone core, approved for food)	<b>K51</b>
O-ring, process flanges, FFKM (FFPM)	<b>K52</b>
O-ring, process flanges, NBR	<b>K53</b>
O-ring, process flanges, EPDM	<b>K54</b>

Options	Order code
Append "-Z" to Article No., add order code and plain text or entry from drop-down list.	
<b>Process flange options</b>	
Process flanges for vertical differential pressure lines (half process flange)	<b>K81</b>
Process flanges (+) - side front	<b>K82</b>
Process flange screws, process flange nuts, material Monel 400/2.4360	<b>K83</b>
Valve ¼-18 NPT, material same as process flanges	<b>K84</b>
Valve mounted on the side, measured medium: Gas	<b>K85</b>
Oval flange enclosed, gasket PTFE + mounting screws	<b>K86</b>
<b>Valve manifolds</b>	
With mounted valve manifold (3-way) 7MF9411-5BA, PTFE sealing rings, chrome-plated steel screws and pressure test certified in factory certificate (EN 10204-2.2)	<b>U01</b>
With mounted valve manifold (3-way) 7MF9411-5BA, PTFE sealing rings, stainless steel screws and pressure test certified in factory certificate (EN 10204-2.2)	<b>U02</b>
With mounted valve manifold (5-way) 7MF9411-5CA, PTFE sealing rings, chrome-plated steel screws and pressure test certified in factory certificate (EN 10204-2.2)	<b>U03</b>
With mounted valve manifold (5-way) 7MF9411-5CA, PTFE sealing rings, stainless steel screws and pressure test certified in factory certificate (EN 10204-2.2)	<b>U04</b>

Options	Order code
Append "-Z" to Article No., add order code and plain text or entry from drop-down list.	
<b>Device settings</b>	
<p>Measuring span</p> <p>Lower range value (max. 5 characters), upper range value (max. 5 characters), unit [mbar, bar, kPa, MPa, psi, ...], example: -0.5 ... 10.5 psi</p> <p>Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).</p> <p>Drop-down list: Pa, MPa, kPa, hPa, bar, mbar, psi, g/cm<sup>2</sup>, kg/cm<sup>2</sup>, kgf/cm<sup>2</sup>, inH<sub>2</sub>O, inH<sub>2</sub>O (4°C), ftH<sub>2</sub>O, mmH<sub>2</sub>O, mmH<sub>2</sub>O (4°C), mH<sub>2</sub>O (4°C), mmHg, inHg, atm, torr</p>	<b>Y01</b>
<p>Square-rooted characteristic [VSLN2, MSLN2], example: VSLN2</p> <p>Drop-down list: VSLN2, MSLN2</p>	<b>Y02</b>
<p>TAG (on stainless steel plate and device parameters, max. 32 characters)</p> <p>Input field: Free text, max. 32 characters</p>	<b>Y15</b>
<p>Measuring point description (on stainless steel plate and device parameters, max. 32 characters)</p> <p>Input field: Free text, max. 32 characters</p>	<b>Y16</b>
<p>TAG short (device parameters, max. 8 characters)</p> <p>Input field: Free text, max. 8 characters</p>	<b>Y17</b>
<p>Local display [Pressure, Percent], reference [None, Absolute, Relative], example: Pressure gauge</p> <p>Drop-down list: Percent, pressure unit, pressure unit abs., pressure unit gauge</p>	<b>Y21</b>
<p>Local display Scaling with standard units [m<sup>3</sup>/s, l/s, m, inch, ...], example 1 ... 5 m<sup>3</sup>/s</p> <p>Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).</p> <p>Drop-down list: m, cm, mm, in, ft, m<sup>3</sup>, l, hl, in<sup>3</sup>, yd<sup>3</sup>, gal, gal (UK), bu, bbl, bbl (US), SCF, Nm<sup>3</sup>, NI, m<sup>3</sup>/sec, m<sup>3</sup>/h, m<sup>3</sup>/d, l/sec, l/min, l/h, Ml/d, ft<sup>3</sup>/sec, ft<sup>3</sup>/h, ft<sup>3</sup>/d, SCF/min, SCF/h, NI/h, Nm<sup>3</sup>/h, gal/sec, gal/min, gal/h, gal/d, Mgal/d, gal (UK)/sec, gal (UK)/min, gal (UK)/h, gal (UK)/d, bbl/sec, bbl/min, bbl/h, bbl/d, kg/sec, kg/min, kg/h, kg/d, g/sec, g/min, g/h, t/min, t/h, t/d, lb/sec, lb/min, lb/h, lb/d, ton/min, ton/h, ton/d, ton (UK)/h, ton (UK)/d.</p>	<b>Y22</b>
<p>Local display Scaling with user-specific units (max. 12 characters), example 1 ... 5 m</p> <p>Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).</p> <p>Input field 3: Free text, max. 8 characters</p>	<b>Y23</b>
<p>Saturation limits instead of 3.8 ... 20.5 mA, example: 3.8 ... 22.0 mA</p> <p>Drop-down list 1: 3.9, 4</p> <p>Drop-down list 2: 20.8, 22</p>	<b>Y30</b>
<p>Fault current instead of 3.6 mA [22.5 mA, 22.8 mA]</p> <p>Drop-down list: 3.75; 21.75; 22.5; 22.6</p>	<b>Y31</b>
<p>Damping in seconds instead of 2 s (0.0 ... 100.0 s)</p> <p>Input field: max. 4 characters and numbers only; decimal places as dot (comma is automatically converted to dot); min. value = 0; max. value = 100.</p>	<b>Y32</b>
<p>ID number of special version</p> <p>Input field: max. 4 characters and only natural numbers from 0 ... 9999</p>	<b>Y99</b>



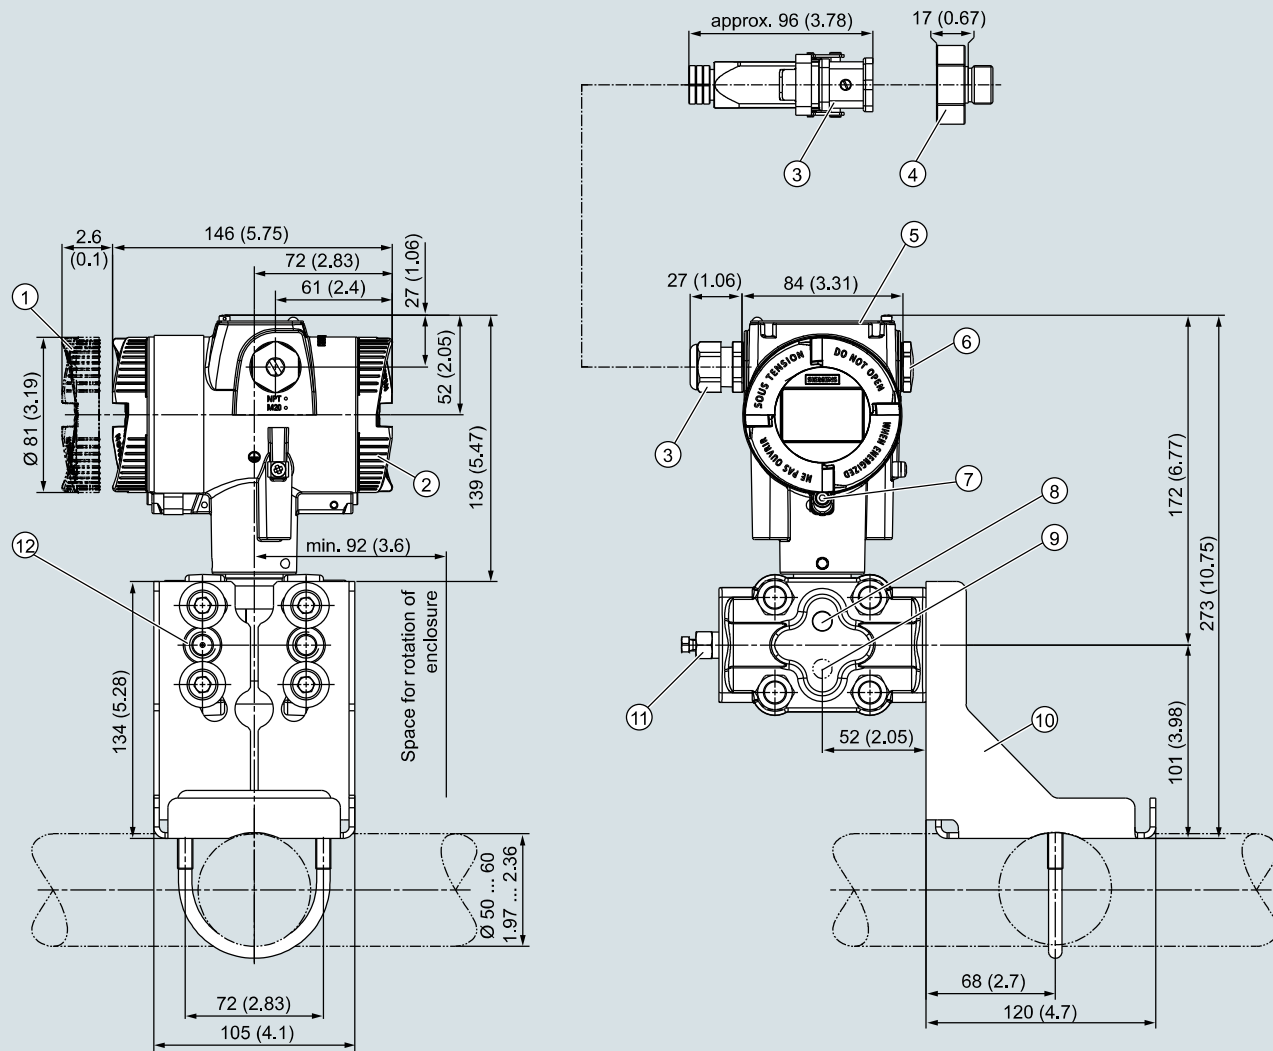
# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for differential pressure and flow

1

## Dimensional drawings



① Electronics side, local display  
(longer overall length for cover with glass pane)<sup>1)</sup>

② Connection side

③ Electrical connection:  
• M20 x 1,5<sup>3)</sup> screw gland  
• ½-14 NPT screw gland  
• Han 7D/Han 8D<sup>2) 3)</sup> device plug  
• M12 device plug<sup>2) 3)</sup>

④ Harting adapter

⑤ Cover over buttons and nameplate with general information

⑥ Blanking plug

⑦ Safety catch  
(only for "flameproof enclosure" type of protection)

⑧ Lateral ventilation for liquid measurement (Standard)

⑨ Lateral ventilation for gas measurement (order option K85)

⑩ Mounting bracket (optional)

⑪ Sealing plug with valve (optional)

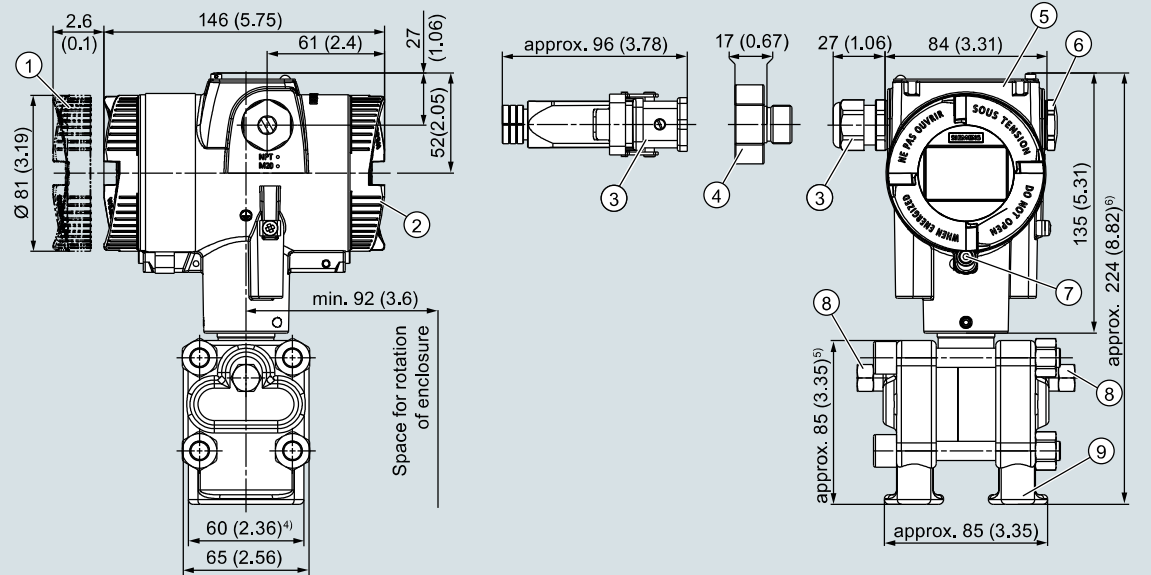
⑫ Process connection: ¼-18 NPT (IEC 61518)

<sup>1)</sup> In addition, allow approx. 22 mm (0.87 inch) for the thread length when removing the covers

<sup>2)</sup> Not with "flameproof enclosure" type of protection

<sup>3)</sup> Not with type of protection "FM + CSA" [is + XP]"

SITRANS P320/P420 pressure transmitter for differential pressure and flow, dimensions in mm (inch)



- ① Electronics side, local display  
(longer overall length for cover with inspection window)<sup>1)</sup>
- ② Connection side
- ③ Electrical connection:
  - M20 x 1,5<sup>3)</sup> screw gland
  - ½-14 NPT screw gland
  - Han 7D/Han 8D<sup>2) 3)</sup> device plug
  - M12 device plug<sup>2) 3)</sup>
- ④ Harting adapter
- ⑤ Cover over buttons and nameplate  
with general information
- ⑥ Blanking plug
- ⑦ Safety catch  
(only for "flameproof enclosure" type of protection)
- ⑧ Sealing plug with valve (option)
- ⑨ Process connection: ¼-18 NPT (IEC 61518)

- 1) In addition, allow approx. 22 mm (0.87 inch) for the thread length when removing the covers
- 2) Not with "flameproof enclosure" type of protection
- 3) Not with type of protection "FM + CSA" [is + XPI]
- 4) 74 mm (2.9 inch) for PN  $\geq 420$  (MAWP  $\geq 6092$  psi)
- 5) 91 mm (3.6 inch) for PN  $\geq 420$  (MAWP  $\geq 6092$  psi)
- 6) 226 mm (8.9 inch) for PN  $\geq 420$  (MAWP  $\geq 6092$  psi)

SITRANS P320/P420 pressure transmitter for differential pressure and flow with process covers for vertical differential pressure lines (option "K81"), dimensions in mm (inch)

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for level

1

## Technical specifications

### SITRANS P320 / SITRANS P420 for level

#### Input

Measured variable

Level

Measuring span (infinitely adjustable) and maximum operating pressure (pursuant to Pressure Equipment Directive 2014/68/EU)

Measuring span

Max. permissible operating pressure MAWP (PS)

Maximum permissible test pressure

25 ... 250 mbar  
2.5 ... 25 kPa  
10 ... 100.5 inH<sub>2</sub>O  
25 ... 600 mbar  
2.5 ... 60 kPa  
10 ... 241 inH<sub>2</sub>O  
53 ... 1600 mbar  
5.3 ... 160 kPa  
21 ... 643 inH<sub>2</sub>O  
166 ... 5000 mbar  
16.6 ... 500 kPa  
2.41 ... 72.5 psi

See "Mounting flange"

Measuring limits

- Low measuring limit
  - Measuring cell with silicone oil filling
  - Measuring cell with inert oil
  - Measuring cell with FDA-compliant oil
- Upper measuring limit
- Lower range value

-100% of max. measuring range or 30 mbar a/3 kPa a/0.44 psi a depending on the mounting flange  
-100% of max. measuring range or 30 mbar a/3 kPa a/0.44 psi a depending on the mounting flange  
-100% of max. measuring range or 100 mbar a/10 kPa a/1.45 psi a  
100% of max. measuring span  
Between the measuring limits (infinitely adjustable)

#### Output

Output signal

- Low saturation limit (infinitely adjustable)
- High saturation limit (infinitely adjustable)
- Ripple (without HART communication)

Adjustable damping

- Current transmitter
- Failure signal

Load

- Without HART communication
- With HART communication

#### HART

4 ... 20 mA  
3.55 mA, factory preset to 3.8 mA  
22.8 mA, factory-set to 20.5 mA or optionally 22.0 mA  
 $I_{pp} \leq 0.5\%$  of max. output current  
0 ... 100 s, continuously adjustable over remote operation  
0 ... 100 s, in increments of 0.1 s, adjustable over display  
3.55 ... 22.8 mA  
3.55 ... 22.8 mA

Resistor R [ $\Omega$ ]

$R = (U_H - 10.5 \text{ V})/22.8 \text{ mA}$ ,  
 $U_H$ : Power supply in V  
 $R = 230 \dots 1100 \Omega$  (HART communicator (handheld))  
 $R = 230 \dots 500 \Omega$  (SIMATIC PDM)

Characteristic curve

- Linearly increasing or linearly decreasing
- Linear increase or decrease or according to the square root (only for differential pressure and flow)

Physical bus

-

Polarity-independent

-

#### Measuring accuracy

Reference conditions

- According to EN 60770-1
- Rising characteristic curve
- Lower range value 0 bar/kPa/psi
- Seal diaphragm stainless steel
- Measuring cell with silicone oil filling
- Room temperature 25 °C (77 °F)

Conformity error at limit point setting, including hysteresis and repeatability

Measuring span ratio r (spread, Turn-Down)

- Linear characteristic
  - 250 mbar/25 kPa/3.6 psi
  - 600 mbar/60 kPa/8.7 psi
  - 1600 mbar/160 kPa/23.21 psi
  - 5 bar/500 kPa/72.5 psi

$r = \text{maximum measuring span/set measuring span or nominal measuring range}$

$r \leq 5$ :  $\leq 0.125\%$   
 $5 < r \leq 10$ :  $\leq (0.007 \cdot r + 0.09)\%$

**SITRANS P320 / SITRANS P420 for level**Influence of ambient temperature  
in % per 28 °C (50 °F)

<ul style="list-style-type: none"> <li>• SITRANS P320 <ul style="list-style-type: none"> <li>- 250 mbar/25 kPa/3.6 psi</li> <li>- 600 mbar/60 kPa/8.7 psi</li> <li>- 1600 mbar/160 kPa/23.21 psi</li> <li>- 5 bar/500 kPa/72.5 psi</li> </ul> </li> <li>• SITRANS P420 <ul style="list-style-type: none"> <li>- 250 mbar/25 kPa/3.6 psi</li> <li>- 5 bar/500 kPa/72.5 psi</li> <li>- 600 mbar/60 kPa/8.7 psi</li> <li>- 1600 mbar/160 kPa/23.21 psi</li> </ul> </li> </ul>	$\leq (0.025 \cdot r + 0.125)\%$  $\leq (0.025 \cdot r + 0.0625)\%$  $\leq (0.125 \cdot r + 0.0625)\%$
--	--

Effect of static pressure

<ul style="list-style-type: none"> <li>• on the lower range value <ul style="list-style-type: none"> <li>- 250 mbar/25 kPa/3.63 psi</li> <li>- 600 mbar/60 kPa/8.70 psi</li> <li>- 1.6 bar/160 kPa/23.21 psi</li> <li>- 5 bar/500 kPa/72.52 psi</li> </ul> </li> <li>• on the measuring span</li> </ul>	$\leq (0.3 \cdot r)\%$ per nominal pressure $\leq (0.15 \cdot r)\%$ per nominal pressure  $\leq (0.1 \cdot r)\%$ per nominal pressure
---	--

Long-term stability at  $\pm 30$  °C ( $\pm 54$  °F)

<ul style="list-style-type: none"> <li>• all measuring cells</li> </ul>	In 5 years $\leq (0.25 \cdot r)\%$ static pressure max. 70 bar/7 MPa/1015 psi
---	---

Step response time  $T_{63}$  (without electrical damping)

Depending on the installed remote seal

Influence of mounting position

Depends on the fill fluid in the mounting flange

Effect of auxiliary power (in % per voltage change)

0.005% per 1 V

**Operating conditions**

Temperature of medium

Measuring cell with silicone oil filling

- High-pressure side: See "Mounting flange"
- Low-pressure side: -40 ... +100 °C (-40 ... +212 °F)

Ambient conditions

- Ambient temperature/enclosure

Always consider the assignment of max. permissible operating temperature to max. permissible operating pressure of the respective flange connection.

- Measuring cell with silicone oil filling
- Display
- Storage temperature
- Climatic class in accordance with IEC 60721-3-4
- Degree of protection
  - According to IEC 60529
  - According to NEMA 250
- Electromagnetic compatibility
  - Emitted interference and interference immunity

-40 ... +85 °C (-40 ... +185 °F)  
-20 ... +80 °C (-4 ... +176 °F)  
-50 ... +85 °C (-58 ... +185 °F)  
4K4H

IP66, IP68  
Type 4X

According to IEC 61326 and NAMUR NE 21

Vibration resistance

- Reference conditions

Specifications apply to devices without mounting bracket

- General operating conditions

- Oscillations (sine) IEC 60068-2-6

10 ... 58 Hz, 0.3 mm (0.01 inch)  
58 ... 500 Hz, 20 m/s<sup>2</sup> (65.62 ft/s<sup>2</sup>)  
1 octave/min  
5 cycles/axis

- Continuous shocks (half-sine) IEC 60068-2-27

250 m/s<sup>2</sup> (820 ft/s<sup>2</sup>)  
6 ms

- Noise (digitally controlled) IEC 60068-2-64

2000 shocks/axis  
10 ... 200 Hz; 1 (m/s<sup>2</sup>)/Hz (3.28 (ft/s<sup>2</sup>)/Hz)  
200 ... 500 Hz; 0.3 (m/s<sup>2</sup>)/Hz (0.98 (ft/s<sup>2</sup>)/Hz)  
4 hours/axle

- Operating conditions for marine applications

- IEC 60068-2-6
- DNVGL-CG-0339, clause 6
- Lloyd's Register Test Specification Number 1, section 12.
- Bureau Veritas Pt C, Ch 3, Sec 6, Table 1, No 7

2 ... 25 Hz, 1.6 mm (0.06 inch)  
25 ... 100 Hz, 40 m/s<sup>2</sup> (131.23 ft/s<sup>2</sup>)  
1 octave/min

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

## for level

1

### SITRANS P320 / SITRANS P420 for level

#### Design

##### Weight

- According to EN (pressure transmitter with mounting flange, without tube)
- According to ASME (pressure transmitter with mounting flange, without tube)

##### Material

- Wetted parts materials

- High-pressure side

Seal diaphragm of mounting flange

Stainless steel, mat. no. 1.4404/316L, Monel 400, mat. no. 2.4360, Alloy B2, mat. no. 2.4617, Alloy C276, mat. no. 2.4819, Alloy C22, mat. no. 2.4602, tantalum, PTFE, PFA, ECTFE

Sealing surface

Smooth according to EN 1092-1, form B1 or ASME B16.5 RF 125 ... 250 AA for stainless steel 316L, EN 2092-1 form B2 or ASME B16.5 RFSF for the remaining materials

- Sealing material in the process flanges

For standard applications

Viton

For underpressure applications on the mounting flange

Copper

- Low-pressure side

Seal diaphragm

Stainless steel, mat. no. 1.4404/316L

Process flanges

Stainless steel, mat. no. 1.4408/316

Process flanges screw

Stainless steel ISO 3506-1 A4-70

O-ring

FPM (Viton)

- Non-wetted parts materials

- Electronics enclosure

- Low-copper die-cast aluminum GD-AISI 12 or stainless steel precision casting, mat. no. 1.4409/ CF-3M
- Standard: Powder coating with polyurethane  
Option: 2 coats: Coat 1: epoxy-based; coat 2: Polyurethane
- Stainless steel type plate (1.4404/316L)

##### Pressure flange screws

Stainless steel ISO 3506-1 A4-70

##### Measuring cell filling

Silicone oil

- Mounting flange fill fluid

Silicone oil or other material

##### Process connection

- High-pressure side
- Low-pressure side

Flange according to EN and ASME

1/4-18 NPT female thread and flat connection with M10 fastening screw thread in accordance with DIN 19213 (M12 for PN 420 (MWP 6092 psi)) or 7/16-20 UNF in accordance with EN 61518

##### Electrical connection

Screw terminals

Cable entry via the following screwed glands:

- M20 x 1.5
- 1/2-14 NPT
- Device plug Han 7D/Han 8D<sup>1)</sup>
- Device plug M12

#### Displays and controls

##### Keys

4 keys for operation directly on the device

##### Display

- With or without integrated display (optional)
- Cover with inspection window (optional)

#### Auxiliary power $U_H$

##### Terminal voltage on pressure transmitter

10.5 ... 45 V DC  
10.5 ... 30 V DC in intrinsically safe mode

##### Ripple

$U_{SS} \leq 0.2 \text{ V}$  (47 ... 125 Hz)

##### Noise

$U_{eff} \leq 1.2 \text{ mV}$  (0.5 ... 10 kHz)

##### Auxiliary power

—

##### Separate supply voltage

—

**SITRANS P320 / SITRANS P420 for level****Certificates and approvals**

Classification according to pressure equipment directive (PED 2014/68/EU)

Drinking water

- WRAS (England)
- ACS (France)
- NSF (USA)

CRN (Canada)

Explosion protection acc. to NEPSI (China)

Explosion protection acc. to INMETRO (Brazil)

Explosion protection

- Intrinsic safety "i"

- Marking
- Permissible ambient temperature
- Permissible temperature of measuring medium
- Connection

- Effective internal inductance/capacitance

- Flameproof enclosure "d"

- Marking
- Permissible ambient temperature
- Permissible temperature of measuring medium
- Connection

- Dust explosion protection for zones 20, 21, 22

- Marking
- Permissible ambient temperature
- Permissible temperature of measuring medium
- Max. surface temperature
- Connection

- Dust explosion protection for zones 21, 22

- Marking
- Permissible ambient temperature
- Permissible temperature of measuring medium
- Connection

- Effective internal inductance/capacitance

- Type of protection for Zone 2

- Marking
- Permissible ambient temperature "ec"
- Permissible temperature of measuring medium
- "ec" connection

For gases of fluid group 1 and liquids of fluid group 1; complies with requirements of article 4, paragraph 3 (sound engineering practice)

No.: 1903094 (option E83)

No.: 18 ACC LY 277 (option E85)

No.: 20180920-MH61350 (option E84)

No.: 0F9863.5C (option E60)

No.: GYJ19.1058X (option E27)

No.: BRA-18-GE-0035X (option E25)

II 1/2 G Ex ia/ib IIC T4/T6 Ga/Gb

-40 ... +80 °C (-40 ... +176 °F) temperature class T4

-40 ... +70 °C (-40 ... +158 °F) temperature class T6

-40 ... +100 °C (-40 ... +212 °F) temperature class T4

-40 ... +70 °C (-40 ... +158 °F) temperature class T6

To certified intrinsically safe circuits with peak values:

$U_i = 30 \text{ V}$ ,  $I_i = 101 \text{ mA}$ ,  $P_i = 760 \text{ mW}$

$U_i = 29 \text{ V}$ ,  $I_i = 110 \text{ mA}$ ,  $P_i = 800 \text{ mW}$

$L_i = 0.24 \text{ } \mu\text{H}$ / $C_i = 3.29 \text{ nF}$

Ex II 1/2 G Ex ia/db IIC T4/T6 Ga/Gb

-40 ... +80 °C (-40 ... +176 °F) temperature class T4

-40 ... +70 °C (-40 ... +158 °F) temperature class T6

-40 ... +100 °C (-40 ... +212 °F) temperature class T4

-40 ... +70 °C (-40 ... +158 °F) temperature class T6

To a circuit with the operating values:

$U_n = 10.5 \text{ to } 45 \text{ V}$ ,  $4 \text{ ... } 20 \text{ mA}$

Ex II 1D Ex tb IIIC T120 °C Da

Ex II 2D Ex tb IIIC T120 °C Db

Ex II 3D Ex tc IIIC T120 °C Dc

-40 ... +80 °C (-40 ... +176 °F)

-40 ... +100 °C (-40 ... +212 °F)

120 °C (248 °F)

To a circuit with the operating values:

$U_n = 10.5 \text{ to } 45 \text{ V}$ ,  $4 \text{ ... } 20 \text{ mA}$

Ex II 2D Ex ib IIIC T120 °C Db

-40 ... +80 °C (-40 ... +176 °F)

-40 ... +100 °C (-40 ... +212 °F)

To certified intrinsically safe circuits with the peak values:

$U_i = 30 \text{ V}$ ,  $I_i = 101 \text{ mA}$ ,  $P_i = 760 \text{ mW}$

$U_i = 29 \text{ V}$ ,  $I_i = 110 \text{ mA}$ ,  $P_i = 800 \text{ mW}$

$L_i = 0.24 \text{ } \mu\text{H}$ / $C_i = 3.29 \text{ nF}$

Ex II 3G Ex ec IIC T4/T6 Gc

-40 ... +80 °C (-40 ... +176 °F) temperature class T4

-40 ... +40 °C (-40 ... +104 °F) temperature class T6

-40 ... +100 °C (-40 ... +212 °F) temperature class T4

-40 ... +70 °C (-40 ... +158 °F) temperature class T6

To a circuit with the operating values:

$U_n = 10.5 \text{ to } 30 \text{ V}$ ,  $4 \text{ ... } 20 \text{ mA}$

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

1

## for level

### SITRANS P320 / SITRANS P420 for level

<ul style="list-style-type: none"> <li>Explosion protection acc. to FM               <ul style="list-style-type: none"> <li>Marking (XP/DIP) or IS; NI; S</li> </ul> </li> <li>Explosion protection according to CSA               <ul style="list-style-type: none"> <li>Marking (XP/DIP) or (IS)</li> </ul> </li> </ul>	<p>Available soon</p> <p>CL I, DIV 1, GP ABCD T4 ... T6; CL II, DIV 1, GP EFG; CL III; Ex ia IIC T4 ... T6; CL I, DIV 2, GP ABCD T4 ... T6; CL II, DIV 2, GP FG; CL III</p> <p>Available soon</p> <p>CL I, DIV 1, GP ABCD T4 ... T6; CL II, DIV 1, GP EFG; CL III; Ex ia IIC T4 ... T6; CL I, DIV 2, GP ABCD T4 ... T6; CL II, DIV 2, GP FG; CL III</p>
NAMUR recommendations	
<ul style="list-style-type: none"> <li>NE 06</li> <li>NE 21</li> <li>NE 23</li> <li>NE 43</li> <li>NE 53</li> <li>NE 80</li> <li>NE 105</li> <li>NE 107</li> <li>NE 131</li> </ul>	<p>Standardized Electrical Signals and Questions Relating to Engineering Technology</p> <p>Electromagnetic Compatibility (EMC) of Industrial Process and Laboratory Control Equipment</p> <p>Extra Low Voltage Circuits with Safe Separation</p> <p>Standardization of the Signal Level for the Failure Information of Digital Transmitters</p> <p>Software and Hardware of Field Devices and Signal Processing Devices with Digital Electronics</p> <p>The Application of the Pressure Equipment Directive to Process Control Devices</p> <p>Specifications for Integrating Fieldbus Devices in Engineering Tools for Field Devices</p> <p>Self-Monitoring and Diagnosis of Field Devices</p> <p>NAMUR Standard Device - Field Devices for Standard Applications</p>

1) Han 8D is identical to Han 8U.

### HART communication

HART	230 ... 1100 Ω
Protocol	HART 7
Software for computer	SIMATIC PDM

### Mounting flange

Nominal diameter	Nominal pressure
<ul style="list-style-type: none"> <li>Acc. to EN 1092-1               <ul style="list-style-type: none"> <li>DN 80</li> <li>DN100</li> </ul> </li> <li>According to ASME B16.5               <ul style="list-style-type: none"> <li>3 inch</li> <li>4 inch</li> </ul> </li> </ul>	<p>PN 40</p> <p>PN 16, PN 40</p> <p>Class 150, class 300</p> <p>Class 150, class 300</p>

## Selection and ordering data

	Article No.
<b>Pressure transmitters for level</b>	
<b>SITRANS P320</b>	➤ 7MF036 - - - - -
<b>SITRANS P420</b>	➤ 7MF046 - - - - -
➤ Click on the Article no. for the online configuration in the PIA Life Cycle Portal.	
<b>Communication</b>	
HART, 4 ... 20 mA	0
<b>Measuring cell filling</b>	
Silicone oil	1
<b>Maximum measuring span</b>	
250 mbar (100.5 inH <sub>2</sub> O)	G
600 mbar (241 inH <sub>2</sub> O)	H
1 600 mbar (643 inH <sub>2</sub> O)	M
5000 mbar (72.5 psi)	P
<b>Process connection</b>	
Version for diaphragm seal with mounting thread 7/16-20 UNF (IEC 61518): Remote seal 7MF0814 must be ordered separately.	V
<b>Wetted parts materials: Process connection, seal diaphragm</b>	
Stainless steel 316L/1.4404, stainless steel 316L/1.4404, process flange stainless steel 316/1.4408	0
<b>Non-wetted parts materials</b>	
Die-cast aluminum	1
Stainless steel precision casting CF3M/1.4409 similar to 316L	2
<b>Enclosure</b>	
Dual chamber device	5
<b>Type of protection</b>	
Without Ex	A
Intrinsic safety	B
Flameproof enclosure	C
Flameproof enclosure, intrinsic safety	D
Dust protection by enclosure Zone 21/22 (DIP), increased safety Zone 2	L
Dust protection by enclosure Zone 20/21/22 (DIP), increased safety Zone 2	M
Combination of options B, C and L (zone model)	S
Combination of options B, C and M (zone model, Class Division)	T
<b>Electrical connections/cable entries</b>	
Thread for cable gland: Cable gland must be ordered separately as option (Axx)	
• 2 x M20 x 1.5	F
• 2 x 1/2-14 NPT	M
<b>Local operation/display</b>	
Without display (cover closed)	0
With display (cover closed)	1
With display (cover with glass pane)	2



# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for level

1

## Selection and ordering data

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Cable glands included</b>	
Plastic	<b>A00</b>
Metal	<b>A01</b>
Stainless steel	<b>A02</b>
Stainless steel 316L/1.4404	<b>A03</b>
CMP, for XP devices	<b>A10</b>
CAPRI ADE 4F, CuZn, cable inner diameter 7 ... 12 mm, cable outer diameter 10 ... 16 mm	<b>A11</b>
CAPRI ADE 4F, stainless steel, cable inner diameter 7 ... 12 mm, cable outer diameter 10 ... 16 mm	<b>A12</b>
<b>Device plug Han mounted left</b>	
Device plug Han 7D (plastic, straight)	<b>A30</b>
Device plug Han 7D (plastic, angled)	<b>A31</b>
Device plug Han 7D (metal, straight)	<b>A32</b>
Device plug Han 7D (metal, angled)	<b>A33</b>
Device plug Han 8D (plastic, straight)	<b>A34</b>
Device plug Han 8D (plastic, angled)	<b>A35</b>
Device plug Han 8D (metal, straight)	<b>A36</b>
Device plug Han 8D (metal, angled)	<b>A37</b>
<b>Cable socket included</b>	
Plastic, for device plug Han 7D and Han 8D	<b>A40</b>
Metal, for device plug Han 7D and Han 8D	<b>A41</b>
<b>Device plug M12 mounted left</b>	
Stainless steel, without cable socket	<b>A62</b>
Stainless steel, with cable socket	<b>A63</b>
<b>Cable entry/connector mounting</b>	
2x sealing plugs M20 x 1.5, IP66/68 installed on both sides	<b>A90</b>
2x sealing plugs ½-14 NPT, IP66/68 installed on both sides	<b>A91</b>
Cable gland/connector mounted left	<b>A97</b>
Cable gland/connector mounted on right	<b>A99</b>
<b>Nameplate labeling (standard labeling: English, unit bar)</b>	
German (bar)	<b>B11</b>
French (bar)	<b>B12</b>
Spanish (bar)	<b>B13</b>
Italian (bar)	<b>B14</b>
Chinese (bar)	<b>B15</b>
Russian (bar)	<b>B16</b>
English (psi)	<b>B20</b>
English (Pa)	<b>B30</b>
Chinese (Pa)	<b>B35</b>
<b>Certificates</b>	
Quality test certificate, 5-point factory calibration (IEC 60770-2)	<b>C11</b>
Inspection certificate (EN 10204-3.1) - Material of pressurized and wetted parts	<b>C12</b>
Factory certificate - NACE (MR 0103-2012 and MR 0175-2009))	<b>C13</b>
Factory certificate (EN 10204-2.2) - Wetted parts	<b>C14</b>
Inspection certificate (EN 10204-3.1) - PMI test of pressurized and wetted parts	<b>C15</b>
<b>Certificates for functional safety</b>	
Functional safety (IEC 61508) - SIL2/3	<b>C20</b>

Options	Order code
Append <b>"-Z"</b> to Article No., add order code and plain text or entry from drop-down list.	
<b>Device options</b>	
PDF file with device settings	<b>D10</b>
Double layer coating (epoxy resin and polyurethane) 120 µm of enclosure and cover	<b>D20</b>
FVMQ enclosure sealing	<b>D21</b>
IP66/IP68 degree of protection (not for device plugs M12 and Han )	<b>D30</b>
TAG label empty	<b>D40</b>
Without labeling of the measuring range on the TAG label	<b>D41</b>
Stainless steel Ex plate 1.4404/316L	<b>D42</b>
Overvoltage protection up to 6 kV (external)	<b>D71</b>
Adhesive labels on transport packaging (supplied by customer)	<b>D90</b>
<b>General approval without Ex approval</b>	
Worldwide (CE, RCM) except EAC, FM, CSA, KCC	<b>E00</b>
Worldwide (CE, RCM, EAC, FM, CSA, KCC)	<b>E01</b>
CSA (USA and Canada)	<b>E06</b>
EAC	<b>E07</b>
FM	<b>E08</b>
KCC	<b>E09</b>
Export approval CPA (China)	<b>E12</b>
<b>Explosion protection approvals</b>	
ATEX (Europe)	<b>E20</b>
CSA (USA and Canada)	<b>E21</b>
FM (USA and Canada)	<b>E22</b>
IECEx (Worldwide)	<b>E23</b>
EACEx (GOST-R, -K, -B)	<b>E24</b>
INMETRO (Brazil)	<b>E25</b>
KCs (Korea)	<b>E26</b>
NEPSI (China)	<b>E27</b>
PESO (India)	<b>E28</b>
UKR Sepro (Ukraine)	<b>E30</b>
ATEX (Europe) and IECEx (Worldwide)	<b>E47</b>
CSA (Canada) and FM (USA)	<b>E48</b>
ATEX (Europe) and IECEx (Worldwide) + CSA (Canada) and FM (USA)	<b>E49</b>
<b>Marine approvals</b>	
DNV-GL (Det Norske Veritas/Germanischer Lloyd)	<b>E50</b>
LR (Lloyds Register)	<b>E51</b>
BV (Bureau Veritas)	<b>E52</b>
ABS (American Bureau of Shipping)	<b>E53</b>
RMR (Russian Maritime Register)	<b>E55</b>
KR (Korean Register of Shipping)	<b>E56</b>
RINA (Registro Italiano Navale)	<b>E57</b>
CCS (China Classification Society)	<b>E58</b>
<b>Country-specific approvals</b>	
CRN approval Canada (Canadian Registration Number)	<b>E60</b>

Options	Order code
Append "-Z" to Article No., add order code and plain text or entry from drop-down list.	
<b>Special approvals</b>	
Oxygen application (with inert liquid, max. 100 bar (1 450 psi) at 60° C (140 °F))	<b>E80</b>
Dual seal	<b>E81</b>
WRC / WRAS (drinking water); only with pressure cap O-rings made of EPDM	<b>E83</b>
NSF61 (drinking water)	<b>E84</b>
ACS (drinking water)	<b>E85</b>
<b>Device settings</b>	
Measuring span Lower range value (max. 5 characters), upper range value (max. 5 characters), unit [mbar, bar, kPa, MPa, psi, ...], example: -0.5 ... 10.5 psi	<b>Y01</b>
Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot).	
Drop-down list: Pa, MPa, kPa, hPa, bar, mbar, psi, g/cm <sup>2</sup> , kg/cm <sup>2</sup> , kgf/cm <sup>2</sup> , inH <sub>2</sub> O, inH <sub>2</sub> O (4°C), ftH <sub>2</sub> O, mmH <sub>2</sub> O, mmH <sub>2</sub> O (4°C), mH <sub>2</sub> O (4°C), mmHg, inHg, atm, torr	
TAG (on stainless steel plate and device parameters, max. 32 characters) Input field: Free text, max. 32 characters	<b>Y15</b>
Measuring point description (on stainless steel plate and device parameters, max. 32 characters) Input field: Free text, max. 32 characters	<b>Y16</b>
TAG short (device parameters, max. 8 characters) Input field: Free text, max. 8 characters	<b>Y17</b>
Local display [Pressure, Percent], reference [None, Absolute, Relative], example: Pressure gauge Drop-down list: Percent, pressure unit, pressure unit abs., pressure unit gauge	<b>Y21</b>
Local display Scaling with standard units [m <sup>3</sup> /s, l/s, m, inch, ...], example 1 ... 5 m Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot). Drop-down list: m, cm, mm, in, ft, m <sup>3</sup> , l, hl, in <sup>3</sup> , ft <sup>3</sup> , yd <sup>3</sup> , gal, gal (UK), bu, bbl, bbl (US), SCF, Nm <sup>3</sup> , NI.	<b>Y22</b>
Local display Scaling with user-specific units (max. 12 characters), example 1 ... 5 m Input field 1 and input field 2: max. 5 characters and numbers only; decimal places as dot (comma is automatically converted to dot). Input field 3: Free text, max. 8 characters	<b>Y23</b>
Saturation limits instead of 3.8 ... 20.5 mA, example: 3.8 ... 22.0 mA Drop-down list 1: 3.9, 4 Drop-down list 2: 20.8, 22	<b>Y30</b>
Fault current instead of 3.6 mA [22.5 mA, 22.8 mA] Drop-down list: 3.75; 21.75; 22.5; 22.6	<b>Y31</b>
Damping in seconds instead of 2 s (0.0 ... 100.0 s) Input field: max. 4 characters and numbers only; decimal places as dot (comma is automatically converted to dot); min. value = 0; max. value = 100.	<b>Y32</b>
ID number of special version Input field: max. 4 characters and only natural numbers from 0 ... 9999	<b>Y99</b>

# Pressure Measurement

Pressure transmitters

for applications with advanced requirements (Advanced)

SITRANS P320/P420

for level

1

Selection and Ordering data		Article No.	Order code
<b>Diaphragm seal</b>		<b>7MF0814 -</b>	
Flange type design, direct connected to a SITRANS P transmitter for level 7MF03../7MF04.. (order separately) Scope of delivery: 1 off		<b>03 - 0</b>	
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.			
<b>Connecting standard EN 1092-1</b>			
<b>Nominal diameter</b>	<b>Nominal pressure</b>		
DN 40	PN 10/16/25/40	<b>0DD</b>	
	PN 63/100	<b>0DF</b>	
	PN 160	<b>0DG</b>	
DN 50	PN 10/16/25/40	<b>0ED</b>	
	PN 63/100	<b>0EE</b>	
	PN 160	<b>0EF</b>	
DN 80	PN 10/16/25/40	<b>0GD</b>	
	PN 100	<b>0GF</b>	
DN 100	PN 10/16	<b>0HB</b>	
	PN 25/40	<b>0HD</b>	
DN 125	PN 16	<b>0JB</b>	
	PN 40	<b>0JD</b>	
<b>Connecting standard ASME B16.5</b>			
<b>Nominal diameter</b>	<b>Nominal pressure</b>		
1½ inch	class 150	<b>1LA</b>	
	class 300	<b>1LB</b>	
	class 400/600	<b>1LD</b>	
	class 900/1500	<b>1LF</b>	
2 inch	class 150	<b>1MA</b>	
	class 300	<b>1MB</b>	
	class 400/600	<b>1MD</b>	
	class 900/1500	<b>1MF</b>	
3 inch	class 150	<b>1PA</b>	
	class 300	<b>1PB</b>	
	class 600	<b>1PD</b>	
	class 1500	<b>1PF</b>	
4 inch	class 150	<b>1QA</b>	
	class 300	<b>1QB</b>	
	class 400	<b>1QD</b>	
	class 1500	<b>1QF</b>	
5 inch	class 150	<b>1RA</b>	
	class 300	<b>1RB</b>	
	class 400	<b>1RC</b>	
<b>Connecting standard J.I.S.</b>			
<b>Nominal diameter</b>	<b>Nominal pressure</b>		
DN 50	10K	<b>2ES</b>	
	20K	<b>2ET</b>	
	50K	<b>2EU</b>	
DN 80	10K	<b>2GS</b>	
	20K	<b>2GT</b>	
	50K	<b>2GU</b>	
DN 100	10K	<b>2HS</b>	
	20K	<b>2HT</b>	
	50K	<b>2HU</b>	
Other version		<b>9AA</b>	<b>H1Y</b>
Add Order code and plain text			

Selection and Ordering data		Article No.	Order code
<b>Diaphragm seal</b>		<b>7MF0814 -</b>	
Flange type design, direct connected to a SITRANS P transmitter for level 7MF03../7MF04.. (order separately) Scope of delivery: 1 off		<b>03 - 0</b>	
<b>Filling liquid</b>			
Silicone oil M5		<b>A</b>	
Silicone oil M50		<b>B</b>	
High-temperature oil		<b>C</b>	
Halocarbon oil		<b>D</b>	
Food-grade oil (FDA listed)		<b>E</b>	
Other version, add Order code and plain text:		<b>Z</b>	<b>P1Y</b>
Filling liquid: ...			
<b>Wetted parts materials</b>			
Stainless steel 316L		<b>A</b>	
• Without coating		<b>D</b>	
• With PFA coating		<b>E0</b>	
• With PTFE coating		<b>F</b>	
• With ECTFE coating		<b>G</b>	
Monel 400, 2.4360		<b>J</b>	
Hastelloy C276, 2.4819		<b>K</b>	
Tantalum		<b>L0</b>	
Titanium, 3.7035		<b>M0</b>	
Nickel 201		<b>Q</b>	
Diaphragm Duplex, 1.4462		<b>R</b>	
Diaphragm plus flange Duplex, 1.4462		<b>S0</b>	
Stainless steel 316L with gold coating		<b>U0</b>	
Hastelloy C4, 2.4610		<b>V0</b>	
Hastelloy C22, 2.4602		<b>Z8</b>	<b>Q1Y</b>
Other version			
Add Order code and plain text			
<b>Extension length</b>			
• without		<b>0</b>	
• 50 mm (2")		<b>1</b>	
• 100 mm (4")		<b>2</b>	
• 150 mm (6")		<b>3</b>	
• 200 mm (8")		<b>4</b>	
• 250 mm (10")		<b>5</b>	
Other version		<b>Z8</b>	<b>Q1Y</b>
Add Order code and plain text			

Selection and Ordering data		Article No.	Order code
<b>Diaphragm seal</b>		<b>7MF0814 -</b>	
Flange type design, direct connected to a SITRANS P transmitter for level 7MF03../7MF04.. (order separately) Scope of delivery: 1 off		<b>03 - 0</b>	
<b>Customer-specific extension length</b>			
Wetted parts stainless steel without coating			
Range	Standard length		
20 ... 50 mm (0.79 ... 1.97")	50 mm (1.97")	<b>A 1</b>	
51 ... 100 mm (2.01 ... 3.94")	100 mm (3.94")	<b>A 2</b>	
101 ... 150 mm (3.98 ... 5.91")	150 mm (5.91")	<b>A 3</b>	
151 ... 200 mm (5.94 ... 7.87")	200 mm (7.87")	<b>A 4</b>	
201 ... 250 mm (7.91 ... 9.84")	250 mm (9.84")	<b>A 5</b>	
Wetted parts stainless steel with ECTFE coating			
Range	Standard length		
20 ... 50 mm (0.79 ... 1.97")	50 mm (1.97")	<b>F 1</b>	
51 ... 100 mm (2.01 ... 3.94")	100 mm (3.94")	<b>F 2</b>	
101 ... 150 mm (3.98 ... 5.91")	150 mm (5.91")	<b>F 3</b>	
151 ... 200 mm (5.94 ... 7.87")	200 mm (7.87")	<b>F 4</b>	
201 ... 250 mm (7.91 ... 9.84")	250 mm (9.84")	<b>F 5</b>	
Wetted parts stainless steel with PFA coating			
Range	Standard length		
20 ... 50 mm (0.79 ... 1.97")	50 mm (1.97")	<b>D 1</b>	
51 ... 100 mm (2.01 ... 3.94")	100 mm (3.94")	<b>D 2</b>	
101 ... 150 mm (3.98 ... 5.91")	150 mm (5.91")	<b>D 3</b>	
151 ... 200 mm (5.94 ... 7.87")	200 mm (7.87")	<b>D 4</b>	
201 ... 250 mm (7.91 ... 9.84")	250 mm (9.84")	<b>D 5</b>	
• Wetted parts Monel 400			
Range	Standard length		
20 ... 50 mm (0.79 ... 1.97")	50 mm (1.97")	<b>G 1</b>	
51 ... 100 mm (2.01 ... 3.94")	100 mm (3.94")	<b>G 2</b>	
101 ... 150 mm (3.98 ... 5.91")	150 mm (5.91")	<b>G 3</b>	
151 ... 200 mm (5.94 ... 7.87")	200 mm (7.87")	<b>G 4</b>	
• Wetted parts Hastelloy C276			
Range	Standard length		
20 ... 50 mm (0.79 ... 1.97")	50 mm (1.97")	<b>J 1</b>	
51 ... 100 mm (2.01 ... 3.94")	100 mm (3.94")	<b>J 2</b>	
101 ... 150 mm (3.98 ... 5.91")	150 mm (5.91")	<b>J 3</b>	
151 ... 200 mm (5.94 ... 7.87")	200 mm (7.87")	<b>J 4</b>	

Selection and Ordering data		Article No.	Order code
<b>Diaphragm seal</b>		<b>7MF0814 -</b>	
Flange type design, direct connected to a SITRANS P transmitter for level 7MF03../7MF04.. (order separately) Scope of delivery: 1 off		<b>03 - 0</b>	
• Wetted parts Tantalum			
Range	Standard length		
20 ... 50 mm (0.79 ... 1.97")	50 mm (1.97")	<b>K 1</b>	
51 ... 100 mm (2.01 ... 3.94")	100 mm (3.94")	<b>K 2</b>	
101 ... 150 mm (3.98 ... 5.91")	150 mm (5.91")	<b>K 3</b>	
151 ... 200 mm (5.94 ... 7.87")	200 mm (7.87")	<b>K 4</b>	

# Pressure Measurement

## Pressure transmitters

for applications with advanced requirements (Advanced)

SITRANS P320/P420

for level

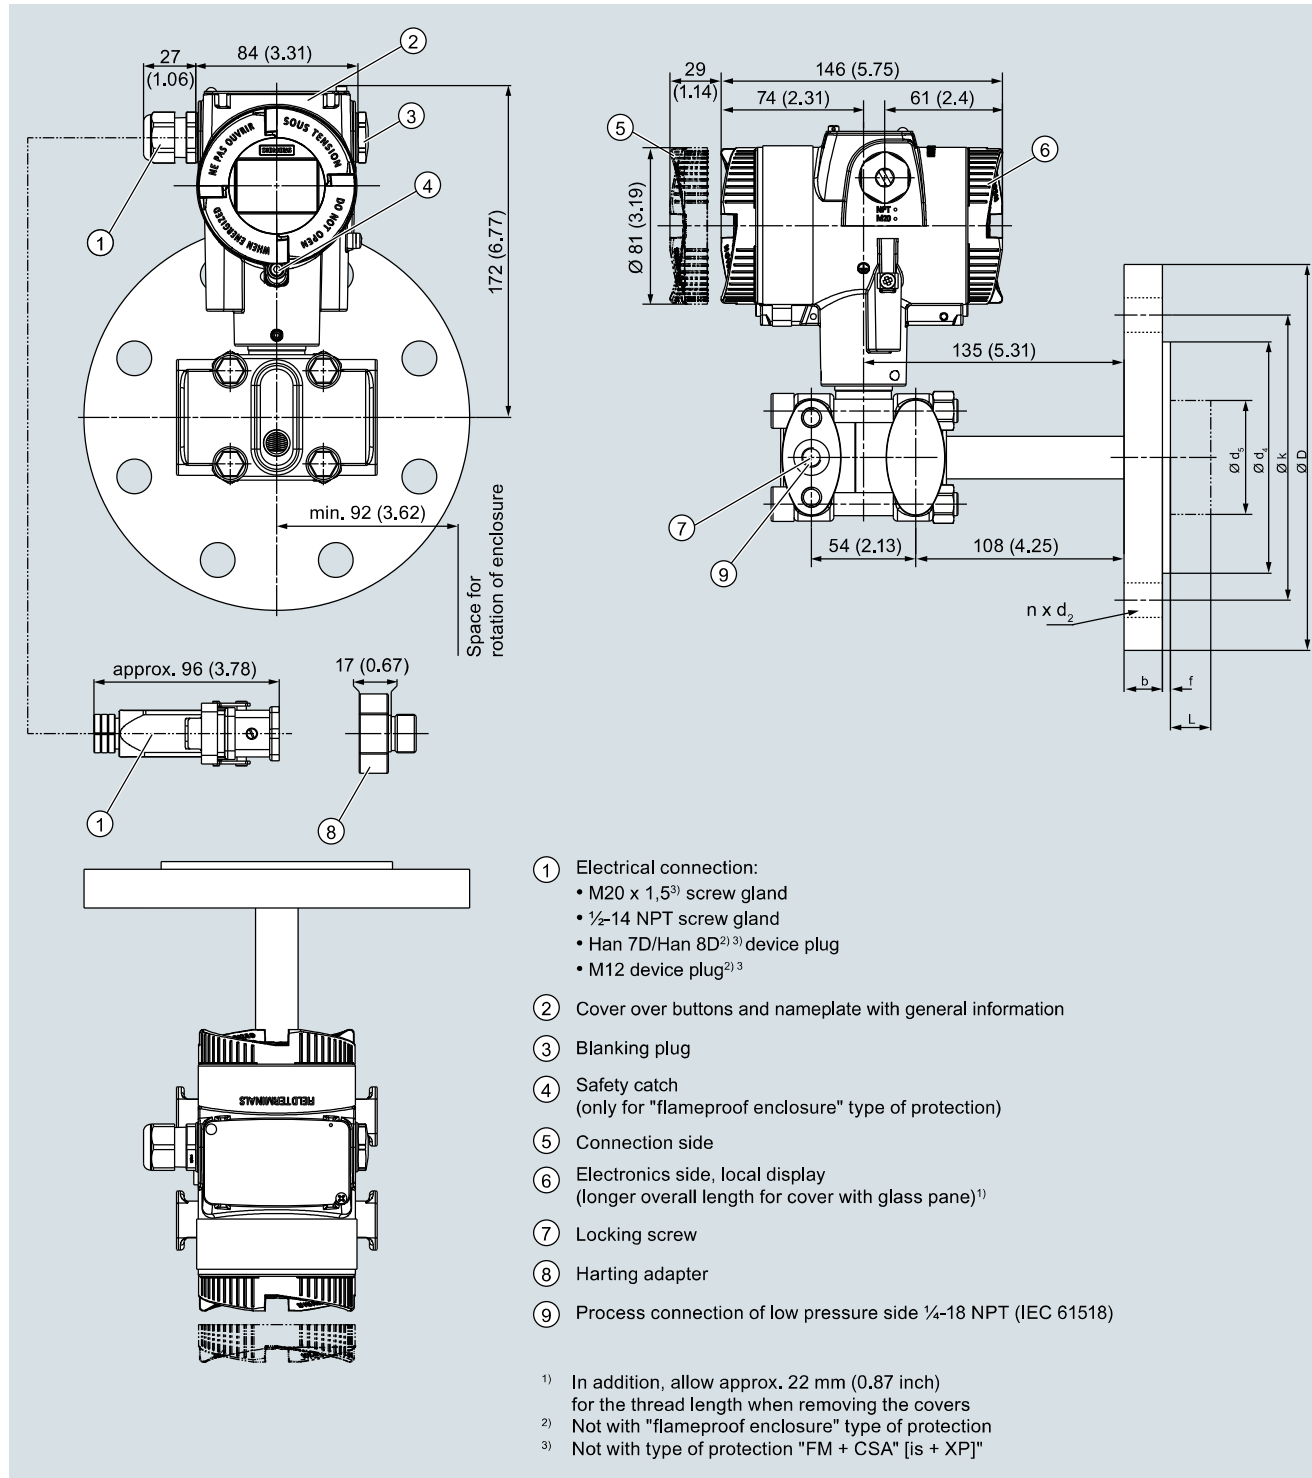
1

Selection and Ordering data	Order code
<b>Further designs</b>	
Add "-Z" to Article No. and specify Order code.	
<b>Factory certificates</b>	
Quality test certificate, 5-point factory calibration (IEC 60770-2)	<b>C11</b>
Inspection certificate according to EN 10204-3.1 for main body and diaphragm	<b>C12</b>
Manufacturer code according to NACE (MR 0103-2012 and MR 0175-2009) (only in combination with wetted parts made of stainless steel 316 L and Hastelloy)	<b>C13</b>
Inspection certificate (EN 10204-3.1) - PMI test of pressurized and wetted parts	<b>C15</b>
Factory certificate on the FDA listing of the oil according to EN 10204-2.2	<b>C17</b>
Factory certificate functional safety (SIL2/3), suitability of devices for use according to IEC 61508 and IEC 61511 (contains SIL declaration of conformity)	<b>C20</b>
<b>Accessories</b>	
Spark arrestor (for differential pressure and level transmitter)	<b>D62</b>
Low-temperature version (for Silicon Oil M50 only)	<b>D67</b>
<b>Negative pressure services</b>	
Negative pressure service (for differential pressure transmitters)	<b>D83</b>
Extended negative pressure services (for differential pressure transmitters)	<b>D88</b>
<b>General product approvals without explosion proof approvals</b>	
Oil- and grease-free cleaned version (for O <sub>2</sub> -appl. including certificate EN10204-2.2 (only with fill fluid Halocarbon oil max. temperature 60 °C and max. pressure 50 bar)	<b>E80</b>
Oil- and grease-free cleaned version (not for O <sub>2</sub> -appl. including certificate EN10204-2.2 (only with fill fluid Halocarbon oil)	<b>E87</b>
<b>Sealing surface</b>	
Sealing surface smooth, form B2/EN1092-1 resp. RFSF/ANSI B16.5 (wetted parts 316L only)	<b>M50</b>
Sealing surface groove to EN1092-1, form D (instead of sealing surface B1, wetted parts 316L only)	<b>M54</b>
Sealing surface RJF (groove) to ASME B16.5 (instead of sealing surface RF 125...250AA, wetted parts 316L only)	<b>M64</b>
Sealing surface with tongue to EN1092-1, form C (wetted parts 316L only)	
• DN 40	<b>M71</b>
• DN 50	<b>M72</b>
• DN 80	<b>M73</b>
• DN 100	<b>M74</b>
• DN 125	<b>M75</b>
Sealing surface with spigot to EN1092-1, form E (wetted parts 316L only)	
• DN 40	<b>M77</b>
• DN 50	<b>M78</b>
• DN 80	<b>M79</b>
• DN 100	<b>M80</b>
• DN 125	<b>M81</b>
Sealing surface with recess to EN1092-1, form F (wetted parts 316L only)	
• DN 50	<b>M84</b>
• DN 80	<b>M85</b>
• DN 100	<b>M86</b>
• DN 125	<b>M87</b>

Selection and Ordering data	Order code
<b>Further designs</b>	
Add "-Z" to Article No. and specify Order code.	
<b>Remote seal connection</b>	
Elongated pipe, 150 mm (5.9 inch) instead of 100 mm (3.9 inch)	<b>S05</b>
Elongated pipe, 200 mm (7.9 inch) instead of 100 mm (3.9 inch)	<b>S06</b>
<b>Customer-specific tube length</b>	
Customer-specific tube length (specify in plain text)	<b>Y44</b>
<b>Specification of process conditions<sup>1)</sup></b>	
Ambient temperature range	
• -10 ... +50 °C (14 ... +122 °F) preset	<b>D66</b>
• -40 ... +50 °C (-40 ... +122 °F)	<b>D67</b>
• -10 ... +85 °C (14 ... +185 °F)	<b>D68</b>
Process temperature min. ... °C/(°F)/max. ... °C/(°F)	<b>Y50</b>

<sup>1)</sup> See also "Specification of process conditions for selection and ordering data", page 1/337.

## Dimensional drawings



SITRANS P320/P420 pressure transmitter for level, including mounting flange, dimensions in mm (inch)

# Pressure Measurement

Pressure transmitters  
for applications with advanced requirements (Advanced)  
SITRANS P320/P420

for level

Connection to EN 1092-1

Nominal diameter	Nominal pressure	b	D	d <sub>2</sub>	d <sub>4</sub>	d <sub>5</sub>	d <sub>M</sub> with tube	d <sub>M</sub> without tube	f	k	n	L
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
DN 40	PN 10/16/25/40	16	150	18	88	38	30	42	2	110	4	0, 50, 100, 150 or 200
	PN 63/100	24	170	22	88	38	30	42	2	125	4	
	PN 160	26	170	22	88	38	30	42	2	125	4	
DN 50	PN 10/16/25/40	18	165	18	102	48.3	40	51	2	125	4	
	PN 63/100	26	195	26	102	48.3	40	51	2	145	4	
	PN 160	28	195	26	102	48.3	40	51	2	145	4	
DN 80	PN 10/16/25/40	22	200	18	138	76	65	85	2	160	8	
	PN 100	30	230	26	138	76	65	85	2	180	8	
DN 100	PN 10/16	18	220	18	158	94	85	85	2	180	8	
	PN 25/40	22	235	22	162	94	85	85	2	190	8	
DN 125	PN 16	20	250	18	188	127	85	116	2	210	8	
	PN 40	24	270	26	188	127	85	116	2	220	8	

Connection according to ASME B16.5

Nominal diameter	Nominal pressure	b	D	d <sub>2</sub>	d <sub>4</sub>	d <sub>5</sub>	d <sub>M</sub> with tube	d <sub>M</sub> without tube	f	k	n	L
	lb/sq.in.	inch (mm)	inch (mm)	inch (mm)	inch (mm)	inch (mm)	inch (mm)	inch (mm)	inch (mm)	inch (mm)		inch (mm)
1½ inch	150	0.63 (15.9)	4.92 (125)	0.63 (15.9)	2.87 (73)	1.5 (38)	1.18 (30)	1.42 (36)	0.08 (2)	3.87 (98.4)	4	0, 2, 3.94, 5.94 or 7.87 (0, 50, 100, 150 or 200)
	300	0.75 (19.1)	6.10 (155)	0.87 (22.2)	2.87 (73)	1.5 (38)	1.18 (30)	1.42 (36)	0.08 (2)	4.5 (114.3)	4	
	400/600	0.88 (22.3)	6.10 (155)	0.87 (22.2)	2.87 (73)	1.5 (38)	1.18 (30)	1.42 (36)	0.28 (7)	4.5 (114.3)	4	
	900/1500	1.25 (31.8)	7.09 (180)	1.13 (28.6)	2.87 (73)	1.5 (38)	1.18 (30)	1.42 (36)	0.28 (7)	4.87 (123.8)	4	
2 inch	150	0.69 (17.5)	5.91 (150)	0.75 (19.1)	3.63 (92.1)	1.9 (48.3)	1.57 (40)	2.01 (51)	0.08 (2)	4.75 (120.7)	4	
	300	0.81 (20.7)	6.5 (165)	0.75 (19.1)	3.63 (92.1)	1.9 (48.3)	1.57 (40)	2.01 (51)	0.08 (2)	5 (127)	8	
	400/600	1.00 (25.4)	6.5 (165)	0.75 (19.1)	3.63 (92.1)	1.9 (48.3)	1.57 (40)	2.01 (51)	0.28 (7)	5 (127)	8	
	900/1500	1.5 (38.1)	8.46 (215)	1.00 (25.4)	3.63 (92.1)	1.9 (48.3)	1.57 (40)	2.01 (51)	0.28 (7)	6.5 (165.1)	8	
3 inch	150	0.88 (22.3)	7.48 (190)	0.75 (19.1)	5 (127)	3 (76)	2.65 (65)	3.35 (85)	0.08 (2)	6 (152.4)	4	
	300	1.06 (27)	8.27 (210)	0.87 (22.2)	5 (127)	3 (76)	2.65 (65)	3.35 (85)	0.08 (2)	6.63 (168.3)	8	
	600	1.23 (31.8)	8.27 (210)	0.87 (22.2)	5 (127)	3 (76)	2.65 (65)	3.35 (85)	0.28 (7)	6.63 (168.3)	8	
	1500	1.88 (47.7)	10.43 (265)	1.25 (31.8)	5 (127)	3 (76)	2.65 (65)	3.35 (85)	0.28 (7)	8 (203.2)	8	
4 inch	150	0.88 (22.3)	9.06 (230)	0.75 (19.1)	6.19 (157.2)	3.69 (94)	3.35 (85)	3.35 (85)	0.08 (2)	7.5 (190.5)	8	
	300	1.19 (30.2)	10.04 (255)	0.87 (22.2)	6.19 (157.2)	3.69 (94)	3.35 (85)	3.35 (85)	0.08 (2)	7.87 (200)	8	
	400	1.38 (35)	10.04 (255)	0.87 (22.2)	6.19 (157.2)	3.69 (94)	3.35 (85)	3.35 (85)	0.28 (7)	7.87 (200)	8	
	1500	2.13 (54)	12.20 (310)	1.37 (34.9)	6.19 (157.2)	3.69 (94)	3.35 (85)	3.35 (85)	0.28 (7)	9.5 (241.3)	8	
5 inch	150	0.88 (22.3)	10.04 (255)	0.87 (22.2)	7.31 (185.7)	5 (127)	4.57 (116)	4.57 (116)	0.08 (2)	8.5 (215.9)	8	
	300	1.31 (33.4)	11.02 (280)	0.87 (22.2)	7.31 (185.7)	5 (127)	4.57 (116)	4.57 (116)	0.08 (2)	9.25 (235)	8	
	400	1.50 (38.1)	11.02 (280)	0.87 (22.2)	7.31 (185.7)	5 (127)	4.57 (116)	4.57 (116)	0.28 (7)	9.25 (235)	8	

Process connection according to J.I.S

Nominal diameter	Nominal pressure	b	D	d <sub>2</sub>	d <sub>4</sub>	d <sub>5</sub>	d <sub>M</sub> with tube	d <sub>M</sub> without tube	f	k	n	L
		mm (inch)	mm (inch)	mm (inch)	mm (inch)	mm (inch)	mm (inch)	mm (inch)	mm (inch)	mm (inch)		mm (inch)
DN 50	10K	14 (0.55)	155 (6.10)	19 (0.75)	96 (3.78)	48.3 (1.9)	40 (1.57)	51 (2.01)	2	120 (4.72)	4	0, 50, 100, 150 or 200 (0, 2, 3.94, 5.94 or 7.87)
	20K	16 (0.63)	165 (6.50)	19 (0.75)	96 (3.78)	48.3 (1.9)	40 (1.57)	51 (2.01)	2	120 (4.72)	8	
	40K	26 (1.02)	165 (6.50)	19 (0.75)	105 (4.13)	48.3 (1.9)	40 (1.57)	51 (2.01)	2	130 (5.12)	8	
DN 80	10K	16 (0.63)	185 (7.28)	19 (0.75)	126 (4.96)	76 (2.99)	65 (2.56)	85 (3.35)	2	150 (5.91)	8	
	20K	20 (0.79)	200 (7.87)	23 (0.91)	132 (5.20)	76 (2.99)	65 (2.56)	85 (3.35)	2	160 (6.30)	8	
	40K	32 (1.26)	210 (8.27)	23 (0.91)	140 (5.51)	76 (2.99)	65 (2.56)	85 (3.35)	2	170 (6.30)	8	
DN 100	10K	16 (0.63)	210 (8.27)	19 (0.75)	151 (5.94)	94 (3.7)	85 (3.35)	85 (3.35)	2	175 (6.89)	8	
	20K	22 (0.87)	225 (8.86)	23 (0.91)	160 (6.30)	94 (3.7)	85 (3.35)	85 (3.35)	2	185 (7.28)	8	
	40K	36 (1.42)	250 (9.84)	25 (0.98)	165 (6.50)	94 (3.7)	85 (3.35)	85 (3.35)	2	205 (8.07)	8	

d: Internal diameter of seal according to DIN 2690

d<sub>M</sub>: Effective diaphragm diameter



**Siemens Ltd.**

Digital Industries  
Process Automation  
R&D Technology Centre  
Thane Belapur Road  
Kalwa, Thane – 400 601

For more information call us on 1800 209 1800

For new enquiries, life cycle support for products,  
systems and solutions, call us at 1800 208 3000 or  
email us at [pisupport.in@siemens.com](mailto:pisupport.in@siemens.com)

Product upgradation is a continuous process. Hence,  
data in this leaflet is subject to change without prior  
notice. For the latest information, please get in  
touch with our Sales Offices.

**[www.siemens.co.in](http://www.siemens.co.in)**